

Trenton Refrigeration

	Page
• Walk-In Evaporator, Low Profile.....	136-143
• Walk-In Evaporator, Medium Profile	143
• Walk-In Evaporator, High Profile.....	144
• Walk-In Evaporator, Two Way Medium Profile.....	145
• Walk-In Evaporator, Low Velocity.....	146
• Air Cooled Condensing Unit, Outdoor, Scroll	147-153
• Air Cooled Condensing Unit, Semi-Hermetic	153-155
• Water Cooled Condensing Unit, Indoor, Semi-Hermetic.....	155
• Air Cooled Condenser	156

Bohn

• Walk-In Evaporator, Low Profile.....	157-159
• Walk-In Evaporator, Low Velocity.....	159
• Air Cooled Condensing Unit, Outdoor, Scroll	160
• Air Cooled Condenser	161

Larkin

• Walk-In Evaporator, Low Profile.....	162
--	-----

Heatcraft Refrigeration

• Reach-in Evaporator	163-167
-----------------------------	---------

Copeland

• Air Cooled Condensing Unit, Indoor, Hermetic	168-169
• Air Cooled Condensing Unit, Indoor, Scroll	170-172
• Air Cooled Condensing Unit, Outdoor, Scroll	173-174
• Water Cooled Condensing Unit, Hermetic, Indoor.....	174-175

Tecumseh

	Page
• Air Cooled Condensing Unit, Indoor, Hermetic	176-178
• Water Cooled Condensing Unit, Indoor, Hermetic	178

Peerless of America

• Reach-in Evaporator, Air Defrost	179
--	-----

LRC Coil Company

• Walk-In Evaporator, Special Application.....	180-181
--	---------

Air Cooled, Condensing Unit, Indoor, Unit Enclosure

•	182
---------	-----

Packless Industries

• Water Cooled Condenser	183-184
• Air Cooled Condenser, Heat Exchanger.....	184

Standard Refrigeration

• Water Cooled Condenser	185
• Liquid Receiver.....	185-186

Westermeyer

• Water Cooled Condenser	187-191
• Liquid Receiver.....	191-193

Accessories

• Barrel Bracket.....	194
• Rotalock® Adapter.....	194-195
• Rotalock® Valve	195
• Rotalock®	195
• Shut Off Valve.....	195

TRENTON REFRIGERATION

WALK-IN EVAPORATOR, LOW PROFILE



A2L - TPLP LINE, ESP+, LOW TEMP, ELECTRIC DEFROST, 6 FPI, LOW PROFILE PRE-ASSEMBLED, GENERATION E

- Dual Rated A1 & A2L
- A2L: R454A, R454C, R455A
- A1: R407A, R407C, R448A, R449A, R404A
- -K: Dual rated A1 & A2L, A2L Mitigation Kit Sold Separately
- -M: Dual rated A1 & A2L, A2L
- Internally enhanced tubing
- Convenient mounting brackets
- Ample electrical and header compartments
- Positive slope, hinged drain pan
- Centrally located, universal drain connection
- Large 3/4" ID (3/4" MPT) drain hole
- Schrader valve on suction header, located outside of cabinet
- All A2L units will include a Leak detection system with shipped loose SSOV (Safety Shut Off Valve) and CSOV (Check Shut Off Valve)

Mitigation included

- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard
- Front access



Part No.	Capacity (BTUH)	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		
							Qty	FLA	MCA	Suction	Liquid	H
TPLP104LES2ER9ESP*1	4070	208-230	1	60	750	1	1	0.6	0.8	5/8	3/8	15.88
TPLP105LES2ER9ESP*1	4900	208-230	1	60	705	1	1	0.6	0.8	5/8	3/8	15.88
TPLP106LES2ER9ESP*1	6330	208-230	1	60	680	1	1	0.6	0.8	5/8	3/8	15.88
TPLP207LES2ER9ESP*1	7160	208-230	1	60	1500	2	2	1.2	1.4	5/8	3/8	15.88
TPLP209LES2ER9ESP*1	9390	208-230	1	60	1410	2	2	1.2	1.4	7/8	3/8	15.88
TPLP211LES2ER9ESP*1	11300	208-230	1	60	1360	2	2	1.2	1.4	7/8	3/8	15.88
TPLP314LES2ER9ESP*1	13900	208-230	1	60	2115	3	3	1.8	2.0	7/8	3/8	15.88
TPLP526LES2ER9ESP*1	16100	208-230	1	60	4080	5	5	3.0	3.2	1 3/8	1/2	15.88
TPLP316LES2ER9ESP*1	16200	208-230	1	60	2040	3	3	1.8	2.0	1 1/8	3/8	15.88
TPLP418LES2ER9ESP*1	18400	208-230	1	60	2820	4	4	2.4	2.6	1 1/8	3/8	15.88
TPLP421LES2ER9ESP*1	21200	208-230	1	60	2720	4	4	2.4	2.6	1 1/8	3/8	15.88
TPLP631LES2ER9ESP*1	31100	208-230	1	60	4080	6	6	3.6	3.8	1 3/8	1/2	15.88

*1 Models will have either K or M at the end of the part number



A2L - TPLP LINE, ESP+, MEDIUM TEMP, AIR DEFROST, 6 FPI LOW PROFILE PRE-ASSEMBLED, GENERATION E

- Dual Rated A1 & A2L
- A2L: R454A, R454C, R455A
- A1: R407A, R407C, R448A, R449A, R404A
- -K: Dual rated A1 & A2L, A2L Mitigation Kit Sold Separately
- -M: Dual rated A1 & A2L, A2L
- Internally enhanced tubing
- Convenient mounting brackets
- Ample electrical and header compartments
- Positive slope, hinged drain pan
- Centrally located, universal drain connection
- Large 3/4" ID (3/4" MPT) drain hole
- Schrader valve on suction header, located outside of cabinet
- All A2L units will include a Leak detection system with shipped loose SSOV (Safety Shut Off Valve) and CSOV (Check Shut Off Valve)
- Capacities rated at R454a +20/25 degF SST

Mitigation included

- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard
- Front access



Part No.	Capacity (BTUH)	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		
							Qty	FLA	MCA	Suction	Liquid	H
TPLP105MAS1ER9ESP*1	4700	115	1	60	750	1	1	1.0	1.3	5/8	3/8	15.88
TPLP107MAS1ER9ESP*1	6400	115	1	60	705	1	1	1.0	1.3	5/8	3/8	15.88
TPLP108MAS1ER9ESP*1	7600	115	1	60	680	1	1	1.0	1.3	5/8	3/8	15.88
TPLP210MAS1ER9ESP*1	9500	115	1	60	1500	2	2	2.0	2.3	7/8	3/8	15.88
TPLP212MAS1ER9ESP*1	12400	115	1	60	1410	2	2	2.0	2.3	7/8	3/8	15.88
TPLP215MAS1ER9ESP*1	14900	115	1	60	1360	2	2	2.0	2.3	7/8	3/8	15.88

Continued on next page

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

Part No.	Capacity (BTUH)	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		
							Qty	FLA	MCA	Suction	Liquid	H
TPLP318MAS1ER9ESP* ¹	18400	115	1	60	2115	3	3	3.0	3.3	7/8	3/8	15.88
TPLP322MAS1ER9ESP* ¹	22100	115	1	60	2040	3	3	3.0	3.3	7/8	3/8	15.88
TPLP424MAS1ER9ESP* ¹	24400	115	1	60	2820	4	4	4.0	4.3	1 1/8	3/8	15.88
TPLP429MAS1ER9ESP* ¹	29400	115	1	60	2720	4	4	4.0	4.3	1 1/8	3/8	15.88
TPLP537MAS1ER9ESP* ¹	36700	115	1	60	3400	5	5	5.0	5.3	1 3/8	1/2	15.88
TPLP644MAS1ER9ESP* ¹	44000	115	1	60	4080	6	6	6.0	6.3	1 3/8	1/2	15.88

¹ Models will have either K or M at the end of the part number



A2L - TPLP LINE, ESP+, MEDIUM TEMP, ELECTRIC DEFROST, 6 FPI LOW PROFILE PRE-ASSEMBLED, GENERATION E

- Dual Rated A1 & A2L
- A2L: R454A, R454C, R455A
- A1: R407A, R407C, R448A, R449A, R404A
- -K: Dual rated A1 & A2L, A2L Mitigation Kit Sold Separately
- -M: Dual rated A1 & A2L, A2L
- Internally enhanced tubing
- Convenient mounting brackets
- Ample electrical and header compartments
- Positive slope, hinged drain pan
- Centrally located, universal drain connection
- Large 3/4" ID (3/4" MPT) drain hole
- Schrader valve on suction header, located outside of cabinet
- All A2L units will include a Leak detection system with shipped loose SSOV (Safety Shut Off Valve) and CSOV (Check Shut Off Valve)
- Capacities rated at R454a +20/25 degF SST

Mitigation included

- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard
- Front access



Part No.	Capacity (BTUH)	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		
							Qty	FLA	MCA	Suction	Liquid	H
TPLP105MES2ER9ESP* ¹	4700	208-230	1	60	750	1	1	0.6	0.8	5/8	3/8	15.88
TPLP107MES2ER9ESP* ¹	6400	208-230	1	60	705	1	1	0.6	0.8	5/8	3/8	15.88
TPLP108MES2ER9ESP* ¹	7600	208-230	1	60	680	1	1	0.6	0.8	5/8	3/8	15.88
TPLP210MES2ER9ESP* ¹	9500	208-230	1	60	1500	2	2	1.2	1.4	7/8	3/8	15.88
TPLP212MES2ER9ESP* ¹	12400	208-230	1	60	1410	2	2	1.2	1.4	7/8	3/8	15.88
TPLP215MES2ER9ESP* ¹	14900	208-230	1	60	1360	2	2	1.2	1.4	7/8	3/8	15.88
TPLP318MES2ER9ESP* ¹	18400	208-230	1	60	2115	3	3	1.8	2.0	7/8	3/8	15.88
TPLP322MES2ER9ESP* ¹	22100	208-230	1	60	2040	3	3	1.8	2.0	7/8	3/8	15.88
TPLP424MES2ER9ESP* ¹	24400	208-230	1	60	2820	4	4	2.4	2.6	1 1/8	3/8	15.88
TPLP429MES2ER9ESP* ¹	29400	208-230	1	60	2720	4	4	2.4	2.6	1 1/8	3/8	15.88
TPLP537MES2ER9ESP* ¹	36700	208-230	1	60	3400	5	5	3.0	3.2	1 3/8	1/2	15.88
TPLP644MES2ER9ESP* ¹	44000	208-230	1	60	4080	6	6	3.6	3.8	1 3/8	1/2	15.88

¹ Models will have either K or M at the end of the part number

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

TRENTON REFRIGERATION

WALK-IN EVAPORATOR, LOW PROFILE



TPLP105LES2DR8ESP

TPLP LINE ESP+, LOW TEMP, ELECTRIC DEFROST, 6 FPI, PRE-ASSEMBLED

- Low temperature: -20°F Evap Temp
- R8: R407A, R407C, R448A, R449A, R404A
- Capacities rated at R404a -20°F SST
- ESP+ models that include: ESP+ Adaptive Defrost Control, ESP+ remote display, EEV electronic expansion valve, solenoid valve
- Nominal capacity rated at 10°F TD
- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard



Part No.	BTUH -20 Deg F at 10 Deg F	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		
							Qty	FLA	MCA	Suction	Liquid	H
TPLP105LES2DR8ESP*	4780	208-230	1	60	705	1	1	0.6	0.8	5/8	3/8	15.88
TPLP106LES2DR8ESP*	6170	208-230	1	60	680	1	1	0.6	0.8	5/8	3/8	15.88
TPLP207LES2DR8ESP*	6980	208-230	1	60	1500	2	2	1.2	1.4	5/8	3/8	15.88
TPLP209LES2DR8ESP*	9160	208-230	1	60	1410	2	2	1.2	1.4	7/8	3/8	15.88
TPLP211LES2DR8ESP*	11000	208-230	1	60	1360	2	2	1.2	1.4	7/8	3/8	15.88
TPLP314LES2DR8ESP*	13600	208-230	1	60	2115	3	3	1.8	2.0	7/8	3/8	15.88
TPLP316LES2DR8ESP*	15800	208-230	1	60	2040	3	3	1.8	2.0	1 1/8	3/8	15.88
TPLP418LES2DR8ESP*	17900	208-230	1	60	2820	4	4	2.4	2.6	1 1/8	3/8	15.88
TPLP421LES2DR8ESP*	20600	208-230	1	60	2720	4	4	2.4	2.6	1 1/8	3/8	15.88
TPLP526LES2DR8ESP*	25600	208-230	1	60	4080	5	5	3.0	3.2	1 3/8	1/2	15.88
TPLP631LES2DR8ESP*	30400	208-230	1	60	4080	6	6	3.6	3.8	1 3/8	1/2	15.88

A COMPLETE LINE
OF PRODUCTS FOR
AWEF-COMPLIANT
APPLICATIONS



For **80 years**, Trenton Refrigeration has been a leader in the commercial refrigeration industry. Utilizing the experience and expertise of our team, Trenton Refrigeration consistently pioneers new and improved innovative solutions that best suit your needs

 *WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov



TPLP106MAS1DR8ESP

TPLP LINE ESP+, MEDIUM TEMP, AIR DEFROST, 6 FPI, PRE-ASSEMBLED

- Medium temperature: 25°F Evap Temp
- R8: R407A, R407C, R448A, R449A, R404A
- ESP+ models that include: ESP+ Adaptive Defrost Control, ESP+ remote display, EEV electronic expansion valve, solenoid valve
- Capacity rated at R404a +25°F SST
- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard



Part No.	Capacity (BTUH)	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		H
							Qty	FLA	MCA	Suction	Liquid	
TPLP106MAS1DR8ESP*	5770	115	1	60	705	1	1	1.0	1.3	5/8	3/8	15.88
TPLP107MAS1DR8ESP*	6830	115	1	60	680	1	1	1.0	1.3	5/8	3/8	15.88
TPLP209MAS1DR8ESP*	8500	115	1	60	1500	2	2	2.0	2.3	7/8	3/8	15.88
TPLP211MAS1DR8ESP*	11100	115	1	60	1410	2	2	2.0	2.3	7/8	3/8	15.88
TPLP214MAS1DR8ESP*	13300	115	1	60	1360	2	2	2.0	2.3	7/8	3/8	15.88
TPLP317MAS1DR8ESP*	16600	115	1	60	2115	3	3	3.0	3.3	7/8	3/8	15.88
TPLP320MAS1DR8ESP*	19800	115	1	60	2040	3	3	3.0	3.3	7/8	3/8	15.88
TPLP422MAS1DR8ESP*	21800	115	1	60	2820	4	4	4.0	4.3	1 1/8	3/8	15.88
TPLP427MAS1DR8ESP*	26400	115	1	60	2720	4	4	4.0	4.3	1 1/8	3/8	15.88
TPLP534MAS1DR8ESP*	32900	115	1	60	3400	5	5	5.0	4.3	1 3/8	1/2	15.88
TPLP640MAS1DR8ESP*	39400	115	1	60	4080	6	6	6.0	6.3	1 3/8	1/2	15.88
TPLP107MAS2DR8ESP*	6830	208-230	1	60	680	1	1	0.6	0.8	5/8	3/8	15.88
TPLP209MAS2DR8ESP*	8500	208-230	1	60	1500	2	2	1.2	1.4	7/8	3/8	15.88
TPLP211MAS2DR8ESP*	11100	208-230	1	60	1410	2	2	1.2	1.4	7/8	3/8	15.88
TPLP214MAS2DR8ESP*	13300	208-230	1	60	1360	2	2	1.2	1.4	7/8	3/8	15.88
TPLP320MAS2DR8ESP*	19800	208-230	1	60	2040	3	3	1.8	2.0	7/8	3/8	15.88

REFRIGERATION EQUIPMENT



TPLP104MES2DR8ESP

TPLP LINE ESP+, MEDIUM TEMP, ELECTRIC DEFROST, 6 FPI, PRE-ASSEMBLED

- Medium temperature: 25°F Evap Temp
- R8: R407A, R407C, R448A, R449A, R404A
- Capacities rated at R404a +25°F SST
- ESP+ models that include: ESP+ Adaptive Defrost Control, ESP+ remote display, EEV electronic expansion valve, solenoid valve
- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard



Part No.	Capacity (BTUH)	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		H
							Qty	FLA	MCA	Suction	Liquid	
TPLP104MES2DR8ESP*	4200	208-230	1	60	750	1	1	0.6	0.8	5/8	3/8	15.88
TPLP107MES2DR8ESP*	6830	208-230	1	60	680	1	1	0.6	0.8	5/8	3/8	15.88
TPLP209MES2DR8ESP*	8500	208-230	1	60	1500	2	2	1.2	1.4	7/8	3/8	15.88
TPLP211MES2DR8ESP*	11100	208-230	1	60	1410	2	2	1.2	1.4	7/8	3/8	15.88
TPLP214MES2DR8ESP*	13300	208-230	1	60	1360	2	2	1.2	1.4	7/8	3/8	15.88
TPLP317MES2DR8ESP*	16600	208-230	1	60	2115	3	3	1.8	2.0	7/8	3/8	15.88
TPLP320MES2DR8ESP*	19800	208-230	1	60	2040	3	3	1.8	2.0	7/8	3/8	15.88
TPLP422MES2DR8ESP*	21800	208-230	1	60	2820	4	4	2.4	2.6	1 1/8	3/8	15.88
TPLP427MES2DR8ESP*	26400	208-230	1	60	2720	4	4	2.4	2.6	1 1/8	3/8	15.88
TPLP534MES2DR8ESP*	32900	208-230	1	60	3400	5	5	3.0	3.2	1 3/8	1/2	15.88
TPLP640MES2DR8ESP*	39400	208-230	1	60	4080	6	6	3.6	3.8	1 3/8	1/2	15.88



*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

TRENTON REFRIGERATION

WALK-IN EVAPORATOR, LOW PROFILE



TPLP104LES2DR2

TPLP LINE, LOW TEMP, ELECTRIC DEFROST, 6 FPI, PRE-ASSEMBLED

- Low temperature: -20°F Evap Temp
- R2: R407A, R407C, R448A, R449A
- R6: R404A
- Capacities rated at: R2: R448a -20°F SST and R6: R404a -20°F SST
- Electro-mechanical models that include: TX valve, solenoid valve and thermostat
- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard



REFRIGERATION EQUIPMENT

Part No.	BTUH -20 Deg F at 10 Deg F	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		H
							Qty	FLA	MCA	Suction	Liquid	
TPLP104LES2DR2*	4070	208-230	1	60	750	1	1	0.6	0.8	5/8	3/8	15.88
TPLP105LES2DR2*	4900	208-230	1	60	705	1	1	0.6	0.8	5/8	3/8	15.88
TPLP106LES2DR2*	6330	208-230	1	60	680	1	1	0.6	0.8	5/8	3/8	15.88
TPLP207LES2DR2*	7160	208-230	1	60	1500	2	2	1.2	1.4	5/8	3/8	15.88
TPLP209LES2DR2*	9390	208-230	1	60	1410	2	2	1.2	1.4	7/8	3/8	15.88
TPLP211LES2DR2*	11300	208-230	1	60	1360	2	2	1.2	1.4	7/8	3/8	15.88
TPLP314LES2DR2*	13900	208-230	1	60	2115	3	3	1.8	2.0	7/8	3/8	15.88
TPLP316LES2DR2*	16200	208-230	1	60	2040	3	3	1.8	2.0	1 1/8	3/8	15.88
TPLP418LES2DR2*	18400	208-230	1	60	2820	4	4	2.4	2.6	1 1/8	3/8	15.88
TPLP421LES2DR2*	21200	208-230	1	60	2720	4	4	2.4	2.6	1 1/8	3/8	15.88
TPLP526LES2DR2*	26100	208-230	1	60	4080	5	5	3.0	3.2	1 3/8	1/2	15.88
TPLP104LES2DR6*	3970	208-230	1	60	750	1	1	0.6	0.8	5/8	3/8	15.88
TPLP105LES2DR6*	4780	208-230	1	60	705	1	1	0.6	0.8	5/8	3/8	15.88
TPLP106LES2DR6*	6170	208-230	1	60	680	1	1	0.6	0.8	5/8	3/8	15.88
TPLP207LES2DR6*	6980	208-230	1	60	1500	2	2	1.2	1.4	5/8	3/8	15.88
TPLP209LES2DR6*	9160	208-230	1	60	1410	2	2	1.2	1.4	7/8	3/8	15.88
TPLP211LES2DR6*	11000	208-230	1	60	1360	2	2	1.2	1.4	7/8	3/8	15.88
TPLP314LES2DR6*	13600	208-230	1	60	2115	3	3	1.8	2.0	7/8	3/8	15.88
TPLP316LES2DR6*	15800	208-230	1	60	2040	3	3	1.8	2.0	1 1/8	3/8	15.88
TPLP418LES2DR6*	17900	208-230	1	60	2820	4	4	2.4	2.6	1 1/8	3/8	15.88
TPLP421LES2DR6*	20600	208-230	1	60	2720	4	4	2.4	2.6	1 1/8	3/8	15.88
TPLP526LES2DR6*	25600	208-230	1	60	4080	5	5	3.0	3.2	1 3/8	1/2	15.88
TPLP631LES2DR6*	30400	208-230	1	60	4080	6	6	3.6	3.8	1 3/8	1/2	15.88



*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov



TPLP104MAS1DR2

TPLP LINE, MEDIUM TEMP, AIR DEFROST, 6 FPI, PRE-ASSEMBLED

- Medium temperature: 25°F Evap Temp
- R2: R407A, R407C, R448A, R449A
- R6: R404A
- Electro-mechanical models that include: TX valve, solenoid valve and thermostat
- Capacity rated at: R2: R448a +25°F SST and R6: R404a +25°F SST
- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard



Part No.	BTUH 25 Deg F at 10 Deg F	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		H
							Qty	FLA	MCA	Suction	Liquid	
TPLP104MAS1DR2*	4310	115	1	60	750	1	1	1.0	1.3	5/8	3/8	15.88
TPLP106MAS1DR2*	5910	115	1	60	705	1	1	1.0	1.3	5/8	3/8	15.88
TPLP107MAS1DR2*	7000	115	1	60	680	1	1	1.0	1.3	5/8	3/8	15.88
TPLP209MAS1DR2*	8700	115	1	60	1500	2	2	2.0	2.3	7/8	3/8	15.88
TPLP211MAS1DR2*	11400	115	1	60	1410	2	2	2.0	2.3	7/8	3/8	15.88
TPLP214MAS1DR2*	13700	115	1	60	1360	2	2	2.0	2.3	7/8	3/8	15.88
TPLP317MAS1DR2*	16900	115	1	60	2115	3	3	3.0	3.3	7/8	3/8	15.88
TPLP320MAS1DR2*	20300	115	1	60	2040	3	3	3.0	3.3	7/8	3/8	15.88
TPLP422MAS1DR2*	22400	115	1	60	2820	4	4	4.0	4.3	1 1/8	3/8	15.88
TPLP427MAS1DR2*	27000	115	1	60	2720	4	4	4.0	4.3	1 1/8	3/8	15.88
TPLP534MAS1DR2*	33700	115	1	60	3400	5	5	5.0	5.3	1 3/8	1/2	15.88
TPLP640MAS1DR2*	40400	115	1	60	4080	6	6	6.0	6.3	1 3/8	1/2	15.88
TPLP209MAS2DR2*	8700	208-230	1	60	1500	2	2	1.2	1.4	7/8	3/8	15.88
TPLP214MAS2DR2*	13700	208-230	1	60	1360	2	2	1.2	1.4	7/8	3/8	15.88
TPLP317MAS2DR2*	16900	208-230	1	60	2115	3	3	1.8	2.0	7/8	3/8	15.88
TPLP534MAS2DR2*	33700	208-230	1	60	3400	5	5	3.0	3.2	1 3/8	1/2	15.88
TPLP104MAS1DR6*	4200	115	1	60	750	1	1	1.0	1.3	5/8	3/8	15.88
TPLP640MAS2DR2*	40400	208-230	1	60	4080	6	6	3.6	3.8	1 3/8	1/2	15.88
TPLP106MAS1DR6*	5770	115	1	60	705	1	1	1.0	1.3	5/8	3/8	15.88
TPLP107MAS1DR6*	6830	115	1	60	680	1	1	1.0	1.3	5/8	3/8	15.88
TPLP209MAS1DR6*	8500	115	1	60	1500	2	2	2.0	2.3	7/8	3/8	15.88
TPLP211MAS1DR6*	11100	115	1	60	1410	2	2	2.0	2.3	7/8	3/8	15.88
TPLP214MAS1DR6*	13300	115	1	60	1360	2	2	2.0	2.3	7/8	3/8	15.88
TPLP317MAS1DR6*	16600	115	1	60	2115	3	3	3.0	3.3	7/8	3/8	15.88
TPLP320MAS1DR6*	19800	115	1	60	2040	3	3	3.0	3.3	7/8	3/8	15.88
TPLP422MAS1DR6*	21800	115	1	60	2820	4	4	4.0	4.3	1 1/8	3/8	15.88
TPLP427MAS1DR6*	26400	115	1	60	2720	4	4	4.0	4.3	1 1/8	3/8	15.88
TPLP534MAS1DR6*	32900	115	1	60	3400	5	5	5.0	4.3	1 3/8	1/2	15.88
TPLP640MAS1DR6*	39400	115	1	60	4080	6	6	6.0	6.3	1 3/8	1/2	15.88
TPLP106MAS2DR6*	5770	208-230	1	60	705	1	1	0.6	0.8	5/8	3/8	15.88
TPLP107MAS2DR6*	6830	208-230	1	60	680	1	1	0.6	0.8	5/8	3/8	15.88
TPLP209MAS2DR6*	8500	208-230	1	60	1500	2	2	1.2	1.4	7/8	3/8	15.88
TPLP211MAS2DR6*	11100	208-230	1	60	1410	2	2	1.2	1.4	7/8	3/8	15.88
TPLP214MAS2DR6*	13300	208-230	1	60	1360	2	2	1.2	1.4	7/8	3/8	15.88
TPLP317MAS2DR6*	16600	208-230	1	60	2115	3	3	1.8	2.0	7/8	3/8	15.88
TPLP320MAS2DR6*	19800	208-230	1	60	2040	3	3	1.8	2.0	7/8	3/8	15.88
TPLP422MAS2DR6*	21800	208-230	1	60	2820	4	4	2.4	2.6	1 1/8	3/8	15.88
TPLP427MAS2DR6*	26400	208-230	1	60	2720	4	4	2.4	2.6	1 1/8	3/8	15.88
TPLP534MAS2DR6*	32900	208-230	1	60	3400	5	5	3.0	3.2	1 3/8	1/2	15.88
TPLP640MAS2DR6*	39400	208-230	1	60	4080	6	6	3.6	3.8	1 3/8	1/2	15.88

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

TRENTON REFRIGERATION

WALK-IN EVAPORATOR, LOW PROFILE



TLP104LES2D

TLP LINE, LOW TEMP, ELECTRIC DEFROST, 6 FPI

- Low temperature: -40°F to 0°F Evap Temp
- R407A, R448A, R449A, R404A, R507
- Capacities rated at R404a -20°F SST
- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard
- A2L Dual Rated equipment available



Part No.	Capacity (BTUH)	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		H
							Qty	FLA	MCA	Suction	Liquid	
TLP104LES2D*1	3970	208-230	1	60	750	1	1	0.6	0.8	5/8	1/2	15.88
TLP105LES2D*1	4780	208-230	1	60	705	1	1	0.6	0.8	5/8	1/2	15.88
TLP207LES2D*1	6980	208-230	1	60	1500	2	2	1.2	1.4	7/8	1/2	15.88
TLP209LES2D*1	9160	208-230	1	60	1410	2	2	1.2	1.4	7/8	1/2	15.88
TLP211LES2D*1	11000	208-230	1	60	1360	2	2	1.2	1.4	7/8	1/2	15.88
TLP314LES2D*1	13600	208-230	1	60	2115	3	3	1.8	2.0	7/8	1/2	15.88
TLP316LES2D*1	15800	208-230	1	60	2040	3	3	1.8	2.0	1 1/8	1/2	15.88
TLP418LES2D*1	17900	208-230	1	60	2820	4	4	2.4	2.6	1 1/8	1/2	15.88
TLP421LES2D*1	20600	208-230	1	60	2720	4	4	2.4	2.6	1 1/8	7/8	15.88
TLP631LES2D*1	30400	208-230	1	60	4080	6	6	3.6	3.8	1 3/8	7/8	15.88
TLP631LET3D*1	30400	208-230	3	60	4080	6	6	3.6	3.8	1 3/8	7/8	15.88

*1 A2L models will have E at the end of the part number



TLP104MAS1D

TLP LINE, MEDIUM TEMP, AIR DEFROST, 6 FPI

- Medium temperature: 10°F to 45°F Evap Temp
- R407A, R407C, R448A, R449A, R404A, R507
- Capacities rated at R404a +25°F SST
- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard
- A2L Dual Rated equipment available



Part No.	Capacity (BTUH)	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		H
							Qty	FLA	MCA	Suction	Liquid	
TLP104MAS1D*1	4200	115	1	60	750	1	1	1.0	1.3	5/8	1/2	15.88
TLP106MAS1D*1	5770	115	1	60	705	1	1	1.0	1.3	5/8	1/2	15.88
TLP107MAS1D*1	6830	115	1	60	680	1	1	1.0	1.3	5/8	1/2	15.88
TLP209MAS1D*1	8500	115	1	60	1500	2	2	2.0	2.3	7/8	1/2	15.88
TLP211MAS1D*1	11100	115	1	60	1410	2	2	2.0	2.3	7/8	1/2	15.88
TLP214MAS1D*1	13300	115	1	60	1360	2	2	2.0	2.3	7/8	1/2	15.88
TLP317MAS1D*1	16600	115	1	60	2115	3	3	3.0	3.3	7/8	1/2	15.88
TLP320MAS1D*1	19800	115	1	60	2040	3	3	3.0	3.3	7/8	1/2	15.88
TLP422MAS1D*1	21800	115	1	60	2820	4	4	4.0	4.3	1 1/8	1/2	15.88
TLP427MAS1D*1	26400	115	1	60	2720	4	4	4.0	4.3	1 1/8	1/2	15.88
TLP534MAS1D*1	32900	115	1	60	3400	5	5	5.0	5.3	1 3/8	1/2	15.88
TLP640MAS1D*1	39400	115	1	60	4080	6	6	6.0	6.3	1 3/8	7/8	15.88
TLP104MAS2D*1	4200	208-230	1	60	750	1	1	0.6	0.8	5/8	1/2	15.88
TLP106MAS2D*1	5770	208-230	1	60	705	1	1	0.6	0.8	5/8	1/2	15.88
TLP107MAS2D*1	6830	208-230	1	60	680	1	1	0.6	0.8	5/8	1/2	15.88
TLP209MAS2D*1	8500	208-230	1	60	1500	2	2	1.2	1.4	7/8	1/2	15.88
TLP214MAS2D*1	13300	208-230	1	60	1360	2	2	1.2	1.4	7/8	1/2	15.88
TLP317MAS2D*1	16600	208-230	1	60	2115	3	3	1.8	2.0	7/8	1/2	15.88

Continued on next page

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

Part No.	Capacity (BTUH)	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		H
							Qty	FLA	MCA	Suction	Liquid	
TLP320MAS2D* ¹	19800	208-230	1	60	2040	3	3	1.8	2.0	7/8	1/2	15.88
TLP422MAS2D* ¹	21800	208-230	1	60	2820	4	4	2.4	2.6	1 1/8	1/2	15.88
TLP427MAS2D* ¹	26400	208-230	1	60	2720	4	4	2.4	2.6	1 1/8	1/2	15.88
TLP534MAS2D* ¹	32900	208-230	1	60	3400	5	5	3.0	3.2	1 3/8	1/2	15.88
TLP640MAS2D* ¹	39400	208-230	1	60	4080	6	6	3.6	3.8	1 3/8	7/8	15.88

¹ A2L models will have E at the end of the part number

WALK-IN EVAPORATOR, MEDIUM PROFILE



TMP224LES2D

TMP LINE, ELECTRIC DEFROST, LOW TEMP, 6 FPI

- Low temperature: -40°F to 0°F Evap Temp
- R407A, R448A, R449A, R404A, R507
- Capacities rated at R404a -20°F SST
- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard
- A2L Dual Rated equipment available



Part No.	Capacity (BTUH)	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		H
							Qty	FLA	MCA	Suction	Liquid	
TMP224LES2D* ¹	19100	208-230	1	60	6420	2	2	4.4	15.0	1 3/8	5/8	27.75
TMP233LES2D* ¹	26400	208-230	1	60	6070	2	2	4.4	15.0	1 3/8	7/8	27.75
TMP224LET3D* ¹	19100	208-230	3	60	6420	2	2	4.4	15.0	1 3/8	5/8	27.75
TMP233LET3D* ¹	26400	208-230	3	60	6070	2	2	4.4	15.0	1 3/8	7/8	27.75
TMP239LET3D* ¹	31900	208-230	3	60	5730	2	2	4.4	15.0	1 5/8	7/8	27.75
TMP347LET3D* ¹	37900	208-230	3	60	9100	3	3	6.6	15.0	1 5/8	7/8	27.75
TMP355LET3D* ¹	44500	208-230	3	60	8590	3	3	6.6	15.0	1 5/8	1 1/8	27.75
TMP470LET3D* ¹	57200	208-230	3	60	11490	4	4	8.8	15.0	2 1/8	1 1/8	27.75

¹ A2L models will have E at the end of the part number



TMP120MAS2D

TMP LINE, AIR DEFROST, MEDIUM TEMP, 6 FPI

- Medium temperature: 10°F to 35°F Evap Temp
- R407A, R407C, R448A, R449A, R404A, R507
- Capacities rated at R404a +25°F SST
- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard
- A2L Dual Rated equipment available



Part No.	Capacity (BTUH)	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		H
							Qty	FLA	MCA	Suction	Liquid	
TMP120MAS2D* ¹	16200	208-230	1	60	3030	1	1	2.2	15.0	7/8	5/8	27.75
TMP232MAS2D* ¹	26000	208-230	1	60	6420	2	2	4.4	15.0	1 1/8	5/8	27.75
TMP240MAS2D* ¹	32500	208-230	1	60	6070	2	2	4.4	15.0	1 3/8	5/8	27.75
TMP248MAS2D* ¹	38600	208-230	1	60	5730	2	2	4.4	15.0	1 3/8	7/8	27.75
TMP360MAS2D* ¹	48900	208-230	1	60	9100	3	3	6.6	15.0	1 5/8	7/8	27.75
TMP372MAS2D* ¹	58900	208-230	1	60	8590	3	3	6.6	15.0	1 5/8	7/8	27.75
TMP486MAS2D* ¹	70100	208-230	1	60	11490	4	4	8.8	15.0	1 5/8	7/8	27.75

¹ A2L models will have E at the end of the part number

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

TRENTON REFRIGERATION

WALK-IN EVAPORATOR, HIGH PROFILE



THP073HAT3A

THP LINE, HIGH/MEDIUM TEMP, AIR DEFROST, 7 FPI

- Compatible with Low GWP Refrigerants
- Heavy gauge textured aluminum cabinet with galvanized steel hangers, support channels and end plates
- Hinged access panels with removable hinge pins and captive fasteners.
- Hinged drain pan with removable hinge pins
- Rugged heavy-gauge galvanized steel rail motor mount / support.
- Stackable design
- Schrader fitting and external equalizer line.
- Factory installed solenoid valve wire harness
- Unit shipped upright for convenient handling and quick installation.
- Capacities rated at R404a +25°F SST
- R407A, R448A, R407C, R404A, R507, R22, R134a
- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard
- A2L Dual Rated equipment available



							Motor Data			Connection Size (In.)	
Part No.	Capacity (BTUH)	Voltage	Phase	Hertz	CFM	Number of Fans	Qty	FLA	MCA	Suction	H
THP073HAT3A* ¹	73000	208-230	3	60	16400	2	2	9.6	10.8	1 5/8	53.03
THP086HAT3A* ¹	86000	208-230	3	60	15200	2	2	9.6	10.8	1 5/8	53.03
THP113HAT3A* ¹	113000	208-230	3	60	15600	2	2	11.2	15.1	2 1/8	53.03
THP130HAT3A* ¹	130000	208-230	3	60	22800	3	3	14.4	15.6	2 1/8	53.66
THP154HAT3A* ¹	154000	208-230	3	60	24700	3	3	16.8	20.1	2 1/8	53.66
THP170HAT3A* ¹	170000	208-230	3	60	23500	3	3	16.8	20.1	2 1/8	53.66
THP189HAT3A* ¹	189000	208-230	3	60	25400	3	3	16.8	20.1	2 5/8	53.66
THP233HAT3A* ¹	233000	208-230	3	60	35600	4	4	22.4	30.1	2 5/8	57.28
THP252HAT3A* ¹	252000	208-230	3	60	33800	4	4	22.4	30.1	2 5/8	57.28
THP278HAT3A* ¹	278000	208-230	3	60	31000	4	4	22.4	30.1	2 5/8	57.28
THP073HAT4A* ¹	73000	460	3	60	16400	2	2	4.8	5.4	1 5/8	53.03
THP113HAT4A* ¹	113000	460	3	60	15600	2	2	5.6	6.3	2 1/8	53.03
THP154HAT4A* ¹	154000	460	3	60	24700	3	3	8.4	9.1	2 1/8	53.66
THP170HAT4A* ¹	170000	460	3	60	23500	3	3	8.4	9.1	2 1/8	53.66
THP189HAT4A* ¹	189000	460	3	60	25400	3	3	8.4	9.1	2 5/8	53.66
THP233HAT4A* ¹	233000	460	3	60	35600	4	4	11.2	15.1	2 5/8	57.28
THP252HAT4A* ¹	252000	460	3	60	33800	4	4	11.2	15.1	2 5/8	57.28
THP278HAT4A* ¹	278000	460	3	60	31000	4	4	11.2	15.1	2 5/8	57.28

¹ A2L models will have E at the end of the part number



*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

WALK-IN EVAPORATOR, TWO WAY MEDIUM PROFILE



TTM207MAS1D

TTM LINE, LOW VELOCITY AIR DEFROST, TWO-WAY, MEDIUM TEMP, 6 FPI

- EC motors with patented SmartSpeed® Technology
- Compatible with Low GWP Refrigerants
- Heavy gauge textured aluminum cabinet construction resists scratches/corrosion and minimizes weight for shipment, installation and service.
- Dual refrigeration coils with two-way air distribution reduces air velocities to minimize product dehydration.
- Air enters through fan and discharges two ways out of each coil side.
- Low height compact size usable storage space.
- Internally enhanced tube.
- Attractive and durable high-density polyethylene fan guards.
- Hinged drain pan provides convenient access for cleaning.
- Terminal board allows for easy electrical connect
- Medium temperature: 10°F to 45°F Evap Temp
- R407A, R407C, R448A, R449A, R404A, R507
- Capacity rated at R404A at 20/25°F
- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard
- A2L Dual Rated equipment available



Part No.	Capacity (BTUH)	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		
							Qty	FLA	MCA	Suction	Liquid	H
TTM207MAS1D* ¹	5680	115	1	60	928	2	2	1.2	1.4	5/8	1/2	23.63
TTM209MAS1D* ¹	6850	115	1	60	807	2	3	1.2	1.4	5/8	1/2	23.63
TTM215MAS1D* ¹	12500	115	1	60	1900	2	2	2.4	3.4	7/8	1/2	23.63
TTM313MAS1D* ¹	10420	115	1	60	1242	3	3	1.8	2.0	5/8	1/2	23.63
TTM318MAS1D* ¹	14800	115	1	60	3030	3	3	3.6	4.9	7/8	1/2	23.63
TTM321MAS1D* ¹	16800	115	1	60	2850	3	3	3.6	4.9	1 1/8	1/2	23.63
TTM531MAS1D* ¹	25400	115	1	60	4630	5	5	6.0	7.9	1 1/8	7/8	23.63
TTM313MAS2D* ¹	10420	208-230	1	60	1242	3	3	0.9	1.0	5/8	1/2	23.63

¹ A2L models will have E at the end of the part number



TTM206LES2D

TTM LINE, LOW VELOCITY ELECTRIC DEFROST, TWO-WAY, LOW TEMP, 6 FPI

- Low temperature: -20°F to 0°F Evap Temp
- R407A, R448A, R449A, R404A, R507
- Capacities rated at R404a -20°F SST
- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard
- A2L Dual Rated equipment available



Part No.	Capacity (BTUH)	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		
							Qty	FLA	MCA	Suction	Liquid	H
TTM206LES2D* ¹	4640	208-230	1	60	807	2	2	0.6	0.7	5/8	1/2	23.63
TTM309LES2D* ¹	6990	208-230	1	60	1242	3	3	0.9	1.0	5/8	1/2	23.63
TTM212LES2D* ¹	9220	208-230	1	60	2020	2	2	1.4	2.3	7/8	1/2	23.63
TTM315LES2D* ¹	12400	208-230	1	60	3030	3	3	2.1	3.3	1 1/8	1/2	23.63

¹ A2L models will have E at the end of the part number

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

TRENTON REFRIGERATION

WALK-IN EVAPORATOR, LOW VELOCITY



TLV106MAS1D

TLV LINE, LOW VELOCITY AIR DEFROST, TWO-WAY, MEDIUM TEMP, 7 FPI

- EC motors with patented SmartSpeed® Technology.
- Compatible with Low GWP Refrigerants
- Heavy gauge textured aluminum cabinet construction resists scratches/corrosion and minimizes weight for shipment, installation and service.
- Specially designed for quiet operation - ideal for prep. rooms.
- Dual refrigeration coils with two-way air distribution reduces air velocities to minimize product dehydration.
- Reduced operating charge with 3/8" OD tubing
- Spacious end compartment allows for easy component installation.
- Attractive and durable high-density polypropylene fan guards.
- Hinged drain pan provides convenient access for cleaning.
- Terminal board allows for easy electrical connections.
- Internally enhanced tube
- R407A, R407C, R448A, R449A, R404A, R507
- Capacity rated at R404A at 20/25°F Evap Temp
- EC motors with patented SmartSpeed® Technology high efficiency and high strength fan guard
- A2L Dual Rated equipment available



Part No.	Capacity (BTUH)	Voltage	Phase	Hertz	CFM	Number of Fans	Motor Data			Connection Size (In.)		H
							Qty	FLA	MCA	Suction	Liquid	
TLV106MAS1D* ¹	4870	115	1	60	850	1	1	0.8	1.9	5/8	1/2	28.25
TLV109MAS1D* ¹	7040	115	1	60	1120	1	1	1.6	1.9	7/8	1/2	28.25
TLV212MAS1D* ¹	10100	115	1	60	1500	2	2	1.6	3.4	7/8	1/2	28.25
TLV217MAS1D* ¹	14100	115	1	60	2000	2	2	3.2	3.4	1 1/8	1/2	28.25
TLV325MAS1D* ¹	20500	115	1	60	2785	3	3	4.8	4.9	1 1/8	1/2	28.25
TLV331MAS1D* ¹	24500	115	1	60	3400	3	3	4.8	4.9	1 1/8	7/8	28.25
TLV437MAS1D* ¹	30300	115	1	60	4000	4	4	6.4	6.4	1 1/8	7/8	28.25
TLV546MAS1D* ¹	37000	115	1	60	4840	5	5	8.0	7.9	1 3/8	7/8	28.25
TLV106MAS2D* ¹	4870	208-230	1	60	850	1	1	0.5	1.3	5/8	1/2	28.25
TLV109MAS2D* ¹	7040	208-230	1	60	1120	1	1	1.0	1.3	7/8	1/2	28.25
TLV212MAS2D* ¹	10100	208-230	1	60	1500	2	2	1.0	2.3	7/8	1/2	28.25
TLV217MAS2D* ¹	14100	208-230	1	60	2000	2	2	2.0	2.3	1 1/8	1/2	28.25
TLV331MAS2D* ¹	24500	208-230	1	60	3400	3	3	3.0	3.3	1 1/8	7/8	28.25
TLV437MAS2D* ¹	30300	208-230	1	60	4000	4	4	4.0	4.3	1 1/8	7/8	28.25
TLV441MAS2D* ¹	33300	208-230	1	60	4370	4	4	4.0	4.3	1 3/8	7/8	28.25
TLV546MAS2D* ¹	37000	208-230	1	60	4840	5	5	5.0	5.3	1 3/8	7/8	28.25

¹ A2L models will have E at the end of the part number

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

AIR COOLED CONDENSING UNIT, OUTDOOR, SCROLL



TEZA008L9HS2ET

A2L - TEZA LINE, LOW TEMPERATURE, OUTDOOR R454A/R454C/R455A, GENERATION E

- Compatible with Low GWP Refrigerants (A1 & A2L)
- Weatherproof electrical control box with compressor contactor and fused control circuit
- Copeland scroll compressor
- High efficiency enhanced tube and fin condenser design
- Energy efficient PSC condenser fan motor on models using chassis 2 – 6
- Receiver with fusible plug and liquid shut off valve
- Suction service valve
- Pre-formed copper tubing
- Liquid injection (low temp. models)
- Unit leak tested and shipped with helium holding charge
- Fixed high pressure switch and adjustable low pressure control
- Receiver inlet valve on 2-fan units models only
- Discharge thermostat on applicable models only

- SmartSpeed EC Fan Motor Technology standard on models using chassis 1



Part No.	HP	Voltage	Phase	Hertz	Motor FLA	MCA (Amps)	Number of Fans	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
									Suction	Liquid	L	W	H	
TEZA008L9HS2ET* ¹	0.8	208-230	1	60	1.0	9.0	1	5.3	5/8	3/8	30.38	24.88	19.38	205.00
TEZA010L9HS2ET*	1	208-230	1	60	1.0	10.3	1	5.3	5/8	3/8	30.38	36.38	19.38	205.00
TEZA015L9HS2ET*	1.5	208-230	1	60	1.0	11.9	1	5.3	5/8	3/8	30.38	36.38	19.38	210.00
TEZA020L9HS2ET*	2	208-230	1	60	1.0	18.4	1	11	7/8	3/8	30.38	36.38	19.38	315.00
TEZA025L9HS2ET*	2.5	208-230	1	60	1.1	21.6	1	14	7/8	1/2	30.38	36.38	19.88	335.00
TEZA030L9HS2ET*	3	208-230	1	60	1.1	19.0	1	14	7/8	3/8	30.38	36.38	19.88	425.00
TEZA035L9HS2ET*	3.5	208-230	1	60	1.1	23.9	1	14	7/8	1/2	30.38	36.38	19.88	430.00
TEZA045L9HS2ET*	4.5	208-230	1	60	2.1	33.4	1	22	1 1/8	1/2	32.88	43.88	30.38	435.00
TEZA055L9HS2ET* ²	5.5	208-230	1	60	2.1	37.0	1	22	1 1/8	1/2	32.88	43.88	30.38	440.00
TEZA008L9HT3ET*	0.8	208-230	3	60	1.0	6.1	1	5.3	5/8	3/8	30.38	24.88	19.38	205.00
TEZA010L9HT3ET*	1	208-230	3	60	1.0	9.3	1	5.3	5/8	3/8	30.38	36.38	19.38	205.00
TEZA015L9HT3ET*	1.5	208-230	3	60	1.0	10.3	1	5.3	5/8	3/8	30.38	36.38	19.38	210.00
TEZA020L9HT3ET*	2	208-230	3	60	1.0	11.8	1	11	7/8	3/8	30.38	36.38	19.38	315.00
TEZA025L9HT3ET*	2.5	208-230	3	60	1.1	13.1	1	14	7/8	1/2	30.38	36.38	19.88	335.00
TEZA030L9HT3ET*	3	208-230	3	60	1.1	13.1	1	14	7/8	3/8	30.38	36.38	19.88	425.00
TEZA035L9HT3ET*	3.5	208-230	3	60	1.1	16.2	1	14	7/8	1/2	30.38	36.38	19.88	430.00
TEZA045L9HT3ET*	4.5	208-230	3	60	2.1	18.6	1	22	1 1/8	1/2	32.88	43.88	30.38	435.00
TEZA055L9HT3ET*	5.5	208-230	3	60	2.1	25.7	1	22	1 1/8	1/2	32.88	43.88	30.38	440.00
TEZA060L9HT3ET*	6	208-230	3	60	2.1	29.4	1	22	1 1/8	1/2	32.88	43.88	30.38	485.00
TEZA075L9HT3ET*	7.5	208-230	3	60	2.1	35.5	1	30	1 3/8	5/8	35.88	52.13	41.88	495.00
TEZA085L9HT3ET*	8.5	208-230	3	60	2.1	40.1	1	30	1 3/8	5/8	35.88	52.13	41.88	525.00
TEZA100L9HT3ET*	10	208-230	3	60	2.1	48.5	1	30	1 3/8	5/8	35.88	52.13	41.88	545.00
TEZA130L9HT3ET*	13	208-230	3	60	4.2	56.8	2	53	1 3/8	5/8	35.88	65.13	41.88	725.00
TEZA150L9HT3ET*	15	208-230	3	60	4.2	67.6	2	53	1 5/8	7/8	35.88	65.13	41.88	745.00
TEZA170L9HT3ET*	17	208-230	3	60	7.2	80.6	2	75	1 5/8	7/8	45.75	75.88	45.25	955.00
TEZA025L9HT4ET* ²	2.5	460	3	60	0.6	6.8	1	14	7/8	1/2	30.38	36.38	19.88	335.00
TEZA030L9HT4ET*	3	460	3	60	0.6	6.9	1	14	7/8	3/8	30.38	36.38	19.88	425.00
TEZA035L9HT4ET*	3.5	460	3	60	0.6	8.6	1	14	7/8	1/2	30.38	36.38	19.88	430.00
TEZA045L9HT4ET*	4.5	460	3	60	1.1	11.0	1	22	1 1/8	1/2	32.88	43.88	30.38	435.00
TEZA055L9HT4ET*	5.5	460	3	60	1.1	12.2	1	22	1 1/8	1/2	32.88	43.88	30.38	440.00
TEZA060L9HT4ET* ²	6	460	3	60	1.1	12.3	1	22	1 1/8	1/2	32.88	43.88	30.38	485.00
TEZA075L9HT4ET*	7.5	460	3	60	1.1	16.0	1	30	1 3/8	5/8	35.88	52.13	41.88	495.00
TEZA085L9HT4ET*	8.5	460	3	60	1.1	19.1	1	30	1 3/8	5/8	35.88	52.13	41.88	525.00
TEZA100L9HT4ET*	10	460	3	60	1.1	23.5	1	30	1 3/8	5/8	35.88	52.13	41.88	545.00
TEZA130L9HT4ET*	13	460	3	60	2.2	26.3	2	53	1 3/8	5/8	35.88	65.13	41.88	725.00
TEZA150L9HT4ET*	15	460	3	60	2.2	27.5	2	53	1 5/8	7/8	35.88	65.13	41.88	745.00
TEZA170L9HT4ET*	17	460	3	60	3.4	29.2	2	75	1 5/8	7/8	45.75	75.88	45.25	955.00

¹ AWEF for R404A, R507 ² AWEF for R407A, R448A, R449A, R404A, R507

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

TRENTON REFRIGERATION

AIR COOLED CONDENSING UNIT, OUTDOOR, SCROLL



A2L

TEZA008H9HS2EB

A2L - TEZA LINE, HIGH TEMPERATURE, OUTDOOR R454A/R454C/R455A, GENERATION E

- Compatible with Low GWP Refrigerants (A1 & A2L)
- Weatherproof electrical control box with compressor contactor and fused control circuit
- Copeland scroll compressor
- High efficiency enhanced tube and fin condenser design
- Receiver with fusible plug and liquid shut off valve
- Suction service valve
- Pre-formed copper tubing
- Liquid injection (low temp. models)
- Unit leak tested and shipped with helium holding charge
- Fixed high pressure switch and adjustable low pressure control
- Receiver inlet valve on 2-fan units models only
- Discharge thermostat on applicable models only
- Time delay relay for compressor



- SmartSpeed EC Fan Motor Technology standard on models using chassis 1
- Energy efficient PSC condenser fan motor on models using chassis 2 – 6

Part No.	HP	Voltage	Phase	Hertz	Motor FLA	MCA (Amps)	Number of Fans	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
									Suction	Liquid	L	W	H	
TEZA008H9HS2EB*	0.8	208-230	1	60	1.0	8.9	1	5.3	5/8	3/8	30.38	24.88	19.38	188.00
TEZA009H9HS2EB*	0.9	208-230	1	60	1.0	11.0	1	5.3	5/8	3/8	30.38	24.88	19.38	188.00
TEZA010H9HS2EB*	1	208-230	1	60	1.1	13.6	1	11	5/8	3/8	30.38	36.38	19.88	285.00
TEZA011H9HS2EB*	1.1	208-230	1	60	1.1	16.9	1	11	5/8	3/8	30.38	36.38	19.88	285.00
TEZA015H9HS2EB*	1.5	208-230	1	60	1.1	16.1	1	11	5/8	3/8	30.38	36.38	19.88	285.00
TEZA025H9HS2EB*	2.5	208-230	1	60	2.1	24.6	1	22	7/8	1/2	30.38	36.38	19.88	405.00
TEZA030H9HS2EB*	3	208-230	1	60	2.1	21.1	1	22	7/8	1/2	32.88	43.88	30.38	410.00
TEZA035H9HS2EB*	3.5	208-230	1	60	2.1	21.5	1	22	7/8	1/2	32.88	43.88	30.38	415.00
TEZA040H9HS2EB*	4	208-230	1	60	2.1	27.7	1	22	1 1/8	1/2	32.88	43.88	30.38	420.00
TEZA045H9HS2EB*	4.5	208-230	1	60	2.1	30.0	1	22	1 1/8	1/2	32.88	43.88	30.38	425.00
TEZA050H9HS2EB*	5	208-230	1	60	2.1	29.7	1	22	1 1/8	1/2	32.88	43.88	30.38	425.00
TEZA007H9HT3EB*	0.7	208-230	3	60	1.0	7.0	1	5.3	5/8	3/8	30.38	24.88	19.38	183.00
TEZA008H9HT3EB*	0.8	208-230	3	60	1.0	7.5	1	5.3	5/8	3/8	30.38	24.88	19.38	188.00
TEZA009H9HT3EB*	0.9	208-230	3	60	1.0	7.6	1	5.3	5/8	3/8	30.38	24.88	19.38	188.00
TEZA010H9HT3EB* ¹	1	208-230	3	60	1.1	11.1	1	11	5/8	3/8	30.38	36.38	19.88	285.00
TEZA011H9HT3EB*	1.1	208-230	3	60	1.1	14.1	1	11	5/8	3/8	30.38	36.38	19.88	285.00
TEZA015H9HT3EB* ¹	1.5	208-230	3	60	1.1	13.2	1	11	5/8	3/8	30.38	36.38	19.88	285.00
TEZA020H9HT3EB* ¹	2	208-230	3	60	1.1	14.4	1	11	7/8	3/8	30.38	36.38	19.88	300.00
TEZA025H9HT3EB*	2.5	208-230	3	60	2.1	19.2	1	22	7/8	1/2	30.38	36.38	19.88	405.00
TEZA030H9HT3EB*	3	208-230	3	60	2.1	21.1	1	22	7/8	1/2	32.88	43.88	30.38	410.00
TEZA035H9HT3EB*	3.5	208-230	3	60	2.1	21.5	1	22	7/8	1/2	32.88	43.88	30.38	415.00
TEZA040H9HT3EB*	4	208-230	3	60	2.1	27.7	1	22	1 1/8	1/2	32.88	43.88	30.38	420.00
TEZA045H9HT3EB*	4.5	208-230	3	60	2.1	30.0	1	22	1 1/8	1/2	32.88	43.88	30.38	425.00
TEZA050H9HT3EB*	5	208-230	3	60	2.1	29.7	1	22	1 1/8	1/2	32.88	43.88	30.38	425.00
TEZA060H9HT3EB*	6	208-230	3	60	2.1	30.2	1	30	1 1/8	5/8	52.13	52.13	52.13	470.00
TEZA061H9HT3EB*	6.1	208-230	3	60	2.1	33.9	1	30	1 1/8	5/8	35.88	52.13	41.88	510.00
TEZA070H9HT3EB*	7	208-230	3	60	4.2	48.6	1	53	1 3/8	5/8	35.88	65.13	41.88	625.00
TEZA076H9HT3EB*	7.6	208-230	3	60	4.2	53.3	1	53	1 3/8	5/8	35.88	65.13	41.88	635.00
TEZA085H9HT3EB*	8.5	208-230	3	60	4.2	58.0	1	53	1 3/8	5/8	35.88	65.13	41.88	645.00
TEZA110H9HT3EB*	11	208-230	3	60	7.2	73.3	2	75	1 3/8	7/8	45.75	75.88	45.25	745.00
TEZA150H9HT3EB* ¹	15	208-230	3	60	7.2	86.0	2	75	1 5/8	7/8	45.75	75.88	45.25	845.00
TEZA020H9HS2EB*	2	208-230	1	60	1.1	20.7	1	11	7/8	3/8	30.38	36.38	19.88	300.00
TEZA076H9HT4EB*	7.6	460	3	60	2.2	23.6	1	53	1 3/8	5/8	35.88	65.13	41.88	635.00
TEZA085H9HT4EB* ¹	8.5	460	3	60	2.2	28.1	1	53	1 3/8	5/8	35.88	65.13	41.88	645.00
TEZA110H9HT4EB*	11	460	3	60	3.4	33.8	2	75	1 3/8	7/8	45.75	75.88	45.25	745.00
TEZA150H9HT4EB*	15	460	3	60	3.4	37.3	2	75	1 5/8	7/8	45.75	75.88	45.25	845.00

¹ AWEF for R407A, R407C, R448A, R449A, R404A, R507



*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov



TEZA010H8HT3DBGF

TEZA LINE, HIGH TEMPERATURE, OUTDOOR R407A R407C R404A R448A R507

- Weatherproof electrical control box with compressor contactor and fused control circuit
- Copeland scroll compressor
- High efficiency enhanced tube and fin condenser design
- SmartSpeed EC Fan Motor

- Receiver with fusible plug and liquid shut off valve
- Suction service valve
- Pre-formed copper tubing
- Liquid injection (low temp. models)
- Unit leak tested and shipped with helium holding charge
- Fixed high pressure switch and adjustable low pressure control
- Receiver inlet valve on 2-fan units models only
- Discharge thermostat on applicable models only
- Time delay relay for compressor

Technology standard on models using chassis 1

- Energy efficient PSC condenser fan motor on models using chassis 2 – 6



Part No.	HP	Voltage	Phase	Hertz	Motor FLA	MCA (Amps)	Number of Fans	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
									Suction	Liquid	L	W	H	
TEZA010H8HT3DBGF* ¹	1	208-230	3	60	2.0	11.1	1	11	5/8	3/8	30.38	36.38	19.88	285.00
TEZA015H8HT3DBGF* ¹	1.5	208-230	3	60	2.0	13.2	1	11	5/8	3/8	30.38	36.38	19.88	285.00
TEZA020H8HT3DBGF* ¹	2	208-230	3	60	2.0	14.4	1	11	5/8	3/8	30.38	36.38	19.88	300.00
TEZA150H8HT3DB* ¹	15	208-230	3	60	5.8	86.0	2	75	1 5/8	7/8	45.75	75.88	45.25	845.00
TEZA025H8HT4DB* ¹	2.5	460	3	60	1.8	9.2	1	22	7/8	3/8	30.38	36.38	19.88	405.00
TEZA061H8HT4DB* ¹	6.1	460	3	60	1.8	18.1	1	30	1 1/8	5/8	35.88	52.13	41.88	510.00
TEZA070H8HT4DB* ¹	7	460	3	60	3.6	21.2	1	53	1 3/8	5/8	35.88	65.13	41.88	625.00
TEZA085H8HT4DB* ¹	8.5	460	3	60	3.6	28.1	1	53	1 3/8	5/8	35.88	65.13	41.88	645.00

¹ AWEF for R407A, R407C, R448A, R449A, R404A, R507



Your URI Branch Is Closer Than You Think!

Local Inventory. Local Experts. Find Your Branch.



 *WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

TRENTON REFRIGERATION

AIR COOLED CONDENSING UNIT, OUTDOOR, SCROLL



A2L - TQZA LINE, LOW TEMPERATURE, OUTDOOR

The Quiet Unit is well-suited where space limitations, energy efficiency or sound levels are of concern. Designed for refrigeration duty, a wide range of options provide flexibility suitable for a variety of applications. Its compact

design and attractive styling make the Quiet Unit highly desirable in urban or light commercial applications, and electronic controls offer remote monitoring capabilities and a wide array of alarms and diagnostic tools. Existing technologies have been combined for the first time to create a product specifically for the North American market. Variable-speed EC motors are used to control head pressure resulting in the lowest watt consumption of any comparable product currently available. Models feature energy-efficient Scroll Compressors.

- "E-Generation" TQZ condensing units are "Dual Rated" and support both A1 and A2L refrigerants.
- Compatible with low GWP refrigerants
- Heavy duty weatherproof construction
- Painted cabinet
- Copeland scroll compressors (except on 006H8 model)
- High efficiency enhanced tube and fin condenser design
- Gold Coat™ fins (epoxy coating)
- High efficiency variable speed EC motor as head pressure control
- Sealed liquid line filter drier and sight glass
- Heated and insulated receiver
- Receiver with fusible plug and liquid shut-off valve
- Suction & discharge service valves
- Suction accumulator
- Liquid injection
- Discharge temp sensor



Part No.	HP	Voltage	Phase	Hertz	Motor FLA	MCA (Amps)	Number of Fans	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
								Suction	Liquid	L	W	H	
TQZA008L9HS2EE*	0.8	208-230	1	60	1.7	9.3	1	3/8	5/8	18.75	48.13	29.25	280.00
TQZA020L9HS2EE*	2	208-230	1	60	1.7	19.6	1	3/8	7/8	18.75	48.13	29.25	280.00
TQZA025L9HS2EE*	2.5	208-230	1	60	1.7	22.2	1	1/2	7/8	18.75	48.13	29.25	290.00
TQZA030L9HS2EE*	3	208-230	1	60	1.7	19.6	1	1/2	7/8	18.75	48.13	29.25	290.00
TQZA015L9HT3EE*	1.5	208-230	3	60	1.7	11.0	1	3/8	5/8	18.75	48.13	29.25	280.00
TQZA025L9HT3EE*	2.5	208-230	3	60	1.7	13.7	1	1/2	7/8	18.75	48.13	29.25	290.00
TQZA030L9HT3EE*	3	208-230	3	60	1.7	13.7	1	1/2	7/8	18.75	48.13	29.25	290.00
TQZA035L9HT3EE*	3.5	208-230	3	60	1.7	16.8	1	1/2	7/8	18.75	48.13	51.88	290.00
TQZA045L9HT3EE*	4.5	208-230	3	60	3.4	19.9	2	1/2	7/8	18.75	48.13	51.88	490.00
TQZA055L9HT3EE*	5.5	208-230	3	60	3.4	27.0	2	1/2	1 1/8	18.75	48.13	51.88	500.00
TQZA060L9HT3EE*	3	208-230	3	60	3.4	33.3	2	1/2	1 1/8	18.75	48.13	51.88	510.00



*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov



A2L - TQZA LINE, MEDIUM TEMPERATURE, OUTDOOR

The Quiet Unit is well-suited where space limitations, energy efficiency or sound levels are of concern. Designed for refrigeration duty, a wide range of options provide flexibility suitable for a variety of applications. Its compact

design and attractive styling make the Quiet Unit highly desirable in urban or light commercial applications, and electronic controls offer remote monitoring capabilities and a wide array of alarms and diagnostic tools. Existing technologies have been combined for the first time to create a product specifically for the North American market. Variable-speed EC motors are used to control head pressure resulting in the lowest watt consumption of any comparable product currently available. Models feature energy-efficient Scroll Compressors.

- “E-Generation” TQZ condensing units are “Dual Rated” and support both A1 and A2L refrigerants.
- Compatible with low GWP refrigerants
- Heavy duty weatherproof construction
- Painted cabinet
- Copeland scroll compressors (except on 006H8 model)
- High efficiency enhanced tube and fin condenser design
- Gold Coat™ fins (epoxy coating)
- High efficiency variable speed EC motor as head pressure control
- Sealed liquid line filter drier and sight glass
- Heated and insulated receiver
- Receiver with fusible plug and liquid shut-off valve
- Suction & discharge service valves



Part No.	HP	Voltage	Phase	Hertz	Motor FLA	MCA (Amps)	Number of Fans	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
								Suction	Liquid	L	W	H	
TQZA007H9HS2EA*	0.7	208-230	1	60	1.7	9.2	1	3/8	5/8	18.75	48.13	29.25	260.00
TQZA008H9HS2EA*	0.8	208-230	1	60	1.7	9.6	1	3/8	5/8	18.75	48.13	29.25	260.00
TQZA009H9HS2EA*	0.9	208-230	1	60	1.7	11.7	2	3/8	5/8	18.75	48.13	29.25	260.00
TQZA010H9HS2EA*	1	208-230	1	60	1.7	14.2	2	3/8	5/8	18.75	48.13	29.25	265.00
TQZA011H9HS2EA*	1.1	208-230	1	60	1.7	17.5	2	3/8	5/8	18.75	48.13	29.25	265.00
TQZA015H9HS2EA*	1.5	208-230	1	60	1.7	16.7	2	3/8	7/8	18.75	48.13	29.25	275.00
TQZA020H9HS2EA*	2	208-230	1	60	1.7	21.3	2	3/8	7/8	18.75	48.13	29.25	275.00
TQZA025H9HS2EA*	2.5	208-230	1	60	1.7	24.2	2	1/2	7/8	18.75	48.13	29.25	275.00
TQZA030H9HS2EA*	3	208-230	1	60	1.7	30.7	2	1/2	7/8	18.75	48.13	29.25	285.00
TQZA035H9HS2EA*	3.5	208-230	1	60	3.4	32.9	1	1/2	7/8	18.75	48.13	51.88	480.00
TQZA040H9HS2EA*	4	208-230	1	60	3.4	36.0	1	1/2	7/8	18.75	48.13	51.88	480.00
TQZA050H9HS2EA*	5	208-230	1	60	3.4	42.3	1	1/2	1 1/8	18.75	48.13	51.88	515.00
TQZA007H9HT3EA*	0.7	208-230	3	60	1.7	7.7	1	3/8	5/8	18.75	48.13	29.25	260.00
TQZA008H9HT3EA*	0.8	208-230	3	60	1.7	8.2	1	3/8	5/8	18.75	48.13	29.25	260.00
TQZA010H9HT3EA*	1	208-230	3	60	1.7	11.7	1	3/8	5/8	18.75	48.13	29.25	265.00
TQZA011H9HT3EA*	1.1	208-230	3	60	1.7	14.7	1	3/8	5/8	18.75	48.13	29.25	265.00
TQZA015H9HT3EA*	1.5	208-230	3	60	1.7	13.8	1	3/8	7/8	18.75	48.13	29.25	275.00
TQZA020H9HT3EA*	2	208-230	3	60	0.9	15.0	1	3/8	7/8	18.75	48.13	29.25	275.00
TQZA025H9HT3EA*	2.5	208-230	3	60	1.7	18.8	1	1/2	7/8	18.75	48.13	29.25	275.00
TQZA030H9HT3EA*	3	208-230	3	60	1.7	20.7	1	1/2	7/8	18.75	48.13	29.25	285.00
TQZA035H9HT3EA*	3.5	208-230	3	60	3.4	22.8	2	1/2	7/8	18.75	48.13	51.88	480.00
TQZA040H9HT3EA*	4	208-230	3	60	3.4	29.0	2	1/2	7/8	18.75	48.13	51.88	480.00
TQZA045H9HT3EA*	4.5	208-230	3	60	3.4	31.3	2	1/2	7/8	18.75	48.13	51.88	515.00
TQZA050H9HT3EA*	5	208-230	3	60	3.4	31.5	2	1/2	1 1/8	18.75	48.13	51.88	515.00
TQZA060H9HT3EA*	6	208-230	3	60	3.4	31.5	2	1/2	1 1/8	18.75	48.13	51.88	520.00
TQZA020H9HT4EA*	2	460	3	60	1.7	13.6	2	3/8	7/8	18.75	48.13	29.25	275.00
TQZD030H9HT3EA*	3	208-230	3	60	3.4	19.2	2	1/2	7/8	18.75	48.13	51.88	480.00
TQZD040H9HT3EA*	4	208-230	3	60	3.4	23.0	2	1/2	7/8	18.75	48.13	51.88	480.00
TQZD050H9HT3EA*	5	208-230	3	60	3.4	33.0	2	1/2	1 1/8	18.75	48.13	51.88	515.00

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

TRENTON REFRIGERATION

AIR COOLED CONDENSING UNIT, OUTDOOR, SCROLL



TOZA020L8HS2DE

TOZA LINE, LOW TEMPERATURE, OUTDOOR R22 R404A R407A R407C R448A R507

- AF, AG models include sealed liquid line filter drier, sight glass and mechanical time clock
- AG models include heated and insulated receiver (required in ambients below 10°F)
- Sound ratings at 100% fan speed and without sound insulated cabinet



Part No.	HP	Voltage	Phase	Hertz	Motor FLA	MCA (Amps)	Number of Fans	Receiver Cap. (Lbs.)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
									Suction	Liquid	L	W	H	
TOZA020L8HS2DE*	2	208-230	1	60	1.7	19.1	1	11	7/8	3/8	18.75	48.13	29.25	320.00
TOZA025L8HS2DE*	2.5	208-230	1	60	1.7	22.2	1	14	7/8	3/8	18.75	48.13	29.25	325.00
TOZA030L8HS2DE*	3	208-230	1	60	1.7	21.0	1	14	7/8	3/8	18.75	48.13	29.25	325.00
TOZA035L8HS2DE*	3.5	208-230	1	60	1.7	25.3	1	14	7/8	1/2	18.75	48.13	29.25	325.00
TOZA045L8HS2DE*	4.5	208-230	1	60	3.4	34.7	2	21.5	7/8	1/2	18.75	48.13	51.88	490.00
TOZA008L8HT3DE*	0.8	208-230	3	60	1.7	6.8	1	11	5/8	3/8	18.75	48.13	29.25	320.00
TOZA020L8HT3DE*	2	208-230	3	60	1.7	12.5	1	11	7/8	3/8	18.75	48.13	29.25	320.00
TOZA025L8HT3DE*	2.5	208-230	3	60	1.7	13.7	1	14	7/8	3/8	18.75	48.13	29.25	325.00
TOZA030L8HT3DE*	3	208-230	3	60	1.7	14.1	1	14	7/8	3/8	18.75	48.13	29.25	325.00
TOZA035L8HT3DE*	3.5	208-230	3	60	1.7	17.6	1	14	7/8	1/2	18.75	48.13	29.25	325.00
TOZA045L8HT3DE*	4.5	208-230	3	60	3.4	20.7	2	21.5	7/8	1/2	18.75	48.13	51.88	490.00
TOZA055L8HT3DE*	5.5	208-230	3	60	3.4	27.0	2	21.5	1 1/8	1/2	18.75	48.13	51.88	500.00
TOZA060L8HT3DE*	6	208-230	3	60	3.4	30.7	2	21.5	1 1/8	1/2	18.75	48.13	51.88	510.00
TOZA015L8HT4DE*	1.5	460	3	60	0.9	4.9	1	11	5/8	3/8	18.75	48.13	29.25	320.00



TOZA007H8HS2DA

TOZA LINE, MEDIUM TEMPERATURE, OUTDOOR

- AB, AD models include sealed liquid line filter drier and sight glass
- AD models include heated and insulated receiver (required for ambients below 10°F)
- Sound ratings at 100% fan speed and without sound insulated cabinet



Part No.	HP	Voltage	Phase	Hertz	Motor FLA	MCA (Amps)	Number of Fans	Receiver Cap. (Lbs.)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
									Suction	Liquid	L	W	H	
TOZA007H8HS2DA*	0.7	208-230	1	60	1.7	9.2	1	11	5/8	3/8	18.75	48.13	29.25	300.00
TOZA008H8HS2DA*	0.8	208-230	1	60	1.7	9.6	1	11	5/8	3/8	18.75	48.13	29.25	300.00
TOZA009H8HS2DA*	0.9	208-230	1	60	1.7	11.7	1	11	5/8	3/8	18.75	48.13	29.25	300.00
TOZA010H8HS2DA*	1	208-230	1	60	1.7	14.2	1	11	5/8	3/8	18.75	48.13	29.25	300.00
TOZA011H8HS2DA*	1.1	208-230	1	60	1.7	17.5	1	11	5/8	3/8	18.75	48.13	29.25	305.00
TOZA015H8HS2DA*	1.5	208-230	1	60	1.7	16.7	1	14	7/8	3/8	18.75	48.13	29.25	305.00
TOZA020H8HS2DA*	2	208-230	1	60	1.7	21.3	1	14	7/8	3/8	18.75	48.13	29.25	325.00
TOZA025H8HS2DA*	2.5	208-230	1	60	1.7	24.2	1	14	7/8	1/2	18.75	48.13	29.25	325.00
TOZA030H8HS2DA*	3	208-230	1	60	1.7	30.7	1	14	7/8	1/2	18.75	48.13	29.25	325.00
TOZA035H8HS2DA*	3.5	208-230	1	60	3.4	32.9	1	21.5	7/8	1/2	18.75	48.13	51.88	490.00
TOZA040H8HS2DA*	4	208-230	1	60	3.4	36.0	1	21.5	7/8	1/2	18.75	48.13	51.88	515.00
TOZA045H8HS2DA*	4.5	208-230	1	60	3.4	38.7	2	21.5	7/8	1/2	18.75	48.13	51.88	515.00
TOZA050H8HS2DA*	5	208-230	1	60	3.4	38.3	2	21.5	1 1/8	1/2	18.75	48.13	51.88	515.00
TOZA008H8HT3DA*	0.8	208-230	3	60	1.7	8.2	1	11	5/8	3/8	18.75	48.13	29.25	300.00
TOZA009H8HT3DA*	0.9	208-230	3	60	1.7	8.3	1	11	5/8	3/8	18.75	48.13	29.25	300.00

Continued on next page

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

Part No.	HP	Voltage	Phase	Hertz	Motor FLA	MCA (Amps)	Number of Fans	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
									Suction	Liquid	L	W	H	
TQZA010H8HT3DA*	1	208-230	3	60	1.7	11.7	1	11	5/8	3/8	18.75	48.13	29.25	300.00
TQZA015H8HT3DA*	1.5	208-230	3	60	1.7	13.8	1	14	7/8	3/8	18.75	48.13	29.25	305.00
TQZA020H8HT3DA*	2	208-230	3	60	1.7	15.0	1	14	7/8	3/8	18.75	48.13	29.25	325.00
TQZA025H8HT3DA*	2.5	208-230	3	60	1.7	18.8	1	14	7/8	1/2	18.75	48.13	29.25	325.00
TQZA030H8HT3DA*	3	208-230	3	60	1.7	20.7	1	14	7/8	1/2	18.75	48.13	29.25	325.00
TQZA035H8HT3DA*	3.5	208-230	3	60	3.4	22.8	1	21.5	7/8	1/2	18.75	48.13	51.88	490.00
TQZA040H8HT3DA*	4	208-230	3	60	3.4	29.0	1	21.5	7/8	1/2	18.75	48.13	51.88	515.00
TQZA045H8HT3DA*	4.5	208-230	3	60	3.4	31.3	2	21.5	7/8	1/2	18.75	48.13	51.88	515.00
TQZA050H8HT3DA*	5	208-230	3	60	3.4	31.0	2	21.5	1 1/8	1/2	18.75	48.13	51.88	515.00
TQZA060H8HT3DA*	6	208-230	3	60	3.4	31.5	2	21.5	1 1/8	1/2	18.75	48.13	51.88	520.00
TQZA011H8HT4DA*	1.1	460	3	60	0.9	6.3	1	11	5/8	3/8	18.75	48.13	29.25	305.00

AIR COOLED CONDENSING UNIT, SEMI-HERMETIC



A2L - TESA LINE, LOW TEMPERATURE, OUTDOOR R454A/R454C/R455A, GENERATION E

- Compatible with Low GWP Refrigerants (A1 & A2L)
- Weatherproof electrical control box with compressor contactor and fused control circuit
- Spring mounted accessible semi-hermetic compressor with suction and discharge vibration eliminator
- High efficiency enhanced tube and fin condenser design
- Energy efficient PSC condenser fan motor
- Receiver with fusible plug and liquid shut off valve
- Fixed high pressure switch and adjustable low pressure control
- Receiver inlet and outlet shutoff valve (8HP and above)
- Suction service valve
- Unit leak tested and shipped with Helium holding charge
- Painted outdoor weather-resistant housing with removable hood
- Flooded head pressure control (Adjustable)
- Crankcase heater
- Fan cycling control (all 2 fan models)



Part No.	HP	Voltage	Phase	Hertz	Motor FLA	MCA (Amps)	Number of Fans	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
									Suction	Liquid	L	W	H	
TESA035L9HT3ET*	3.5	208-230	3	60	2.1	22.1	1	22	1 1/8	1/2	32.88	43.88	30.38	588.00
TESA040L9HT3ET*	4	208-230	3	60	2.1	35.0	1	22	1 1/8	1/2	32.88	43.88	30.38	618.00
TESA060L9HT3ET*	6	208-230	3	60	2.1	37.4	1	30	1 1/8	1/2	35.88	52.13	41.88	781.00
TESA061L9HT3ET*	6.1	208-230	3	60	2.1	35.6	1	30	1 3/8	5/8	35.88	52.13	41.88	819.00
TESA075L9HT3ET*	7.5	208-230	3	60	2.1	40.5	1	30	1 3/8	5/8	35.88	52.13	41.88	827.00
TESA090L9HT3ET*	9	208-230	3	60	4.2	50.5	2	53	1 3/8	5/8	35.88	65.13	41.88	885.00
TESA100L9HT3ET*	10	208-230	3	60	4.2	56.0	2	53	1 3/8	5/8	35.88	65.13	41.88	885.00
TESA120L9HT3ET*	12	208-230	3	60	7.2	63.5	2	75	1 5/8	7/8	45.75	75.88	45.25	1185.00
TESA130L9HT3ET*	13	208-230	3	60	7.2	71.3	2	75	1 5/8	7/8	45.75	75.88	45.25	1185.00
TESA150L9HT3ET*	15	208-230	3	60	7.2	73.0	2	75	1 5/8	7/8	45.75	75.88	45.25	1185.00
TESA220L9HT3ET*	22	208-230	3	60	7.2	87.6	2	75	2 1/8	7/8	45.75	75.88	45.25	1185.00
TESA075L9HT4ET*	7.5	460	3	60	1.1	20.7	1	30	1 3/8	5/8	35.88	52.13	41.88	827.00
TESA090L9HT4ET*	9	460	3	60	2.2	23.1	2	53	1 3/8	5/8	35.88	65.13	41.88	885.00
TESA100L9HT4ET*	10	460	3	60	2.2	25.5	2	53	1 3/8	5/8	35.88	65.13	41.88	885.00
TESA120L9HT4ET*	12	460	3	60	3.4	31.5	2	75	1 5/8	7/8	45.75	75.88	45.25	1185.00
TESA130L9HT4ET*	13	460	3	60	3.4	35.4	2	75	1 5/8	7/8	45.75	75.88	45.25	1185.00
TESA150L9HT4ET*	15	460	3	60	3.4	36.3	2	75	1 5/8	7/8	45.75	75.88	45.25	1185.00
TESA220L9HT4ET*	22	460	3	60	3.4	43.5	2	75	2 1/8	7/8	45.75	75.88	45.25	1185.00

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

TRENTON REFRIGERATION

AIR COOLED CONDENSING UNIT, SEMI-HERMETIC



TESA050H9HT3EB

A2L - TESA LINE, HIGH TEMPERATURE, OUTDOOR R454A/R454C/R455A, GENERATION E

- Compatible with Low GWP Refrigerants (A1 & A2L)
- Weatherproof electrical control box with compressor contactor and fused control circuit
- Spring mounted accessible semi-hermetic compressor with suction and discharge vibration eliminator
- High efficiency enhanced tube and fin condenser design
- Energy efficient PSC condenser fan motor
- Receiver with fusible plug and liquid shut off valve
- Fixed high pressure switch and adjustable low pressure control
- Receiver inlet and outlet shutoff valve (8HP and above)
- Suction service valve
- Unit leak tested and shipped with Helium holding charge
- Painted outdoor weather-resistant housing with removable hood
- Flooded head pressure control (Adjustable)
- Crankcase heater
- Fan cycling control (all 2 fan models)



Part No.	HP	Voltage	Phase	Hertz	Motor FLA	MCA (Amps)	Number of Fans	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
									Suction	Liquid	L	W	H	
TESA050H9HT3EB*	5	208-230	3	60	2.1	30.0	1	30	1 1/8	1/2	35.88	52.13	41.88	766.00
TESA051H9HT3EB*	5.1	208-230	3	60	2.1	30.0	1	30	1 1/8	1/2	35.88	52.13	41.88	766.00
TESA075H9HT3EB*	7.5	208-230	3	60	2.1	41.6	1	30	1 3/8	5/8	35.88	52.13	41.88	780.00
TESA077H9HT3EB*	7.7	208-230	3	60	4.2	44.2	2	53	1 3/8	5/8	35.88	65.13	41.88	885.00
TESA080H9HT3EB*	8	208-230	3	60	4.2	55.5	2	53	1 3/8	5/8	35.88	65.13	41.88	885.00
TESA100H9HT3EB*	10	208-230	3	60	4.2	58.7	2	53	1 3/8	5/8	35.88	65.13	41.88	885.00
TESA120H9HT3EB*	12	208-230	3	60	7.2	67.3	2	75	1 3/8	7/8	45.75	75.88	45.25	1085.00
TESA150H9HT3EB*	15	208-230	3	60	7.2	81.7	2	75	1 3/8	7/8	45.75	75.88	45.25	1085.00
TESA200H9HT3EB*	20	208-230	3	60	7.2	86.7	2	75	1 3/8	7/8	45.75	75.88	45.25	1085.00
TESA100H9HT4EB*	10	460	3	60	2.2	27.2	2	53	1 3/8	5/8	35.88	65.13	41.88	885.00
TESA120H9HT4EB*	12	460	3	60	3.4	32.9	2	75	1 3/8	7/8	45.75	75.88	45.25	1085.00
TESA150H9HT4EB*	15	460	3	60	3.4	39.6	2	75	1 3/8	7/8	45.75	75.88	45.25	1085.00
TESA200H9HT4EB*	20	460	3	60	5.4	43.2	2	75	1 3/8	7/8	45.75	75.88	45.25	1085.00



TESA060L8HT3DF

TESA LINE, LOW TEMPERATURE, OUTDOOR R404A R407A R407C R448A, AWEF COMPLIANT

- Outdoor weather-resistant housing with removable hood
- Flooded head pressure control (non-adjustable)
- Crankcase heater
- B Suffix: Liquid line filter drier and sight glass
- See Document Tab on URI.com for AWEF-compliant applications and capacities



Part No.	HP	Voltage	Phase	Hertz	Motor FLA	MCA (Amps)	Number of Fans	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
									Suction	Liquid	L	W	H	
TESA060L8HT3DF*	6	208-230	3	60	3.5	38.8	1	31	1 1/8	1/2	35.88	52.13	41.88	781.00
TESA075L8HT3DF*	7.5	208-230	3	60	3.5	41.9	1	31	1 3/8	5/8	35.88	52.13	41.88	827.00
TESA100L8HT3DF*	10	208-230	3	60	4.2	58.8	2	54	1 3/8	5/8	35.88	65.13	41.88	885.00
TESA150L8HT3DF*	15	208-230	3	60	7.2	76.4	2	76	1 5/8	7/8	45.75	75.88	45.25	1185.00
TESA150L8HT4DF*	15	460	3	60	3.4	38.3	2	76	1 5/8	7/8	45.75	75.88	45.25	1185.00

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov



TESA100H8HT3DB

TESA LINE, HIGH TEMPERATURE, OUTDOOR R404A R407A R407C R448A AWEF COMPLIANT

- Outdoor weather-resistant housing with removable hood
- Flooded head pressure control (non-adjustable)
- Crankcase heater
- B Suffix: Liquid line filter drier and sight glass
- See Document Tab on URI.com for AWEF-compliant applications and capacities



Part No.	HP	Voltage	Phase	Hertz	Motor FLA	MCA (Amps)	Number of Fans	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
									Suction	Liquid	L	W	H	
TESA100H8HT3DB*	10	208-230	3	60	7.0	61.5	2	53	1 3/8	5/8	35.88	65.13	41.88	885.00
TESA150H8HT3DB*	12	208-230	3	60	10.6	85.1	2	75	1 3/8	7/8	45.75	75.88	45.25	1085.00
TESA150H8HT4DB*	15	460	3	60	5.4	41.7	2	75	1 3/8	7/8	45.75	75.88	45.25	1085.00

WATER COOLED CONDENSING UNIT, INDOOR, SEMI-HERMETIC



W030M8IT3

W LINE, MEDIUM/HIGH TEMPERATURE R407A R448A R407C R404A R507 R22

The W water-cooled condensing unit can be applied where air cooled units are not desirable or space is unavailable. This unit can operate with tower or city water and its size will allow operation in a minimum space; Shell and tube

condensers are standard. Available in sizes from 3/4 Hp to 40 Hp, the unit is complete with high efficiency accessible hermetic compressors.

- Sturdy electrical control box with compressor contactor and fused control circuit

- Spring mounted, accessible semi-hermetic compressor
- Sealed liquid line filter drier and sight glass (5.0 HP and up)
- Discharge vibration eliminator
- Copper tubing secured with Hydra-Zorb/Cush-A-Clamp
- Shell and tube water cooled condenser with fusible plug or pressure relief valve and liquid shut off valve
- Adjustable dual high/low pressure control
- Oil failure control on all applicable models
- Demand Cooling™ on R22 low temp. models
- Suction and discharge service valve
- Receiver capacity for R22



Part No.	HP	Voltage	MCA (Amps)	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
					Suction	Liquid	L	W	H	
W030M8IT3*	3	208-230	16.4	51	1 1/8	1/2	36.50	17.00	28.75	448.00
W050M8IT3*	5	208-230	27.9	59	1 1/8	1/2	42.50	17.00	28.88	623.00
W100M8IT3*	10	208-230	54.5	123	1 3/8	7/8	51.50	27.50	32.00	860.00
W150M8IT3*	15	208-230	74.5	173	1 5/8	1 1/8	51.63	27.50	34.00	943.00
W030M8IT4*	3	460	8.0	51	1 1/8	1/2	36.50	17.00	28.75	448.00
W050M8IT4*	5	460	13.0	59	1 1/8	1/2	42.50	17.00	28.88	623.00
W075M8IT4*	7.5	460	17.3	109	1 3/8	5/8	45.25	17.00	33.00	659.00
W150M8IT4*	15	460	36.3	173	1 5/8	1 1/8	51.63	27.50	34.00	943.00



*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

TRENTON REFRIGERATION

AIR COOLED CONDENSER



TCS002S2A

air discharge

TCS LINE, HORIZONTAL/VERTICAL AIR

The TCS air-cooled condenser is an economical and practical solution to small condensing unit applications. Available in nominal sizes from 2 to 24 tons THR. Also available in 460/1/60 and 575/1/60 power supply. Horizontal or vertical

- Heavy gauge galvanized steel cabinet
- ThermoSpan™ coil design eliminates tube failures on tube sheet
- Internally enhanced tubing with enhanced fin optimizes coil performance
- Energy efficient PSC motors with internal overload protection
- Unit shipped with nitrogen holding charge



Part No.	Number of Fans	Capacity THR (BTUH)		Horse-power	Voltage	Phase	Hertz	CFM	MCA (Amps)	Connection OD (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
		R22 20°F TD	R404A 15°F TD							Inlet	Outlet	H	W	L	
TCS002S2A*	1	24800	18200	1/6	208-230	1	60	2180	1.4	5/8	3/8	38.38	24.25	26.50	127.00
TCS003S2A*	1	30800	22700	1/6	208-230	1	60	1950	1.4	5/8	1/2	38.38	24.25	26.50	131.00
TCS005S2A*	1	51900	38200	1/3	208-230	1	60	4570	2.7	7/8	5/8	38.38	31.75	39.00	150.00
TCS006S2A*	1	62300	45800	1/3	208-230	1	60	4080	2.7	7/8	5/8	38.38	31.75	39.00	157.00
TCS008S2A*	1	77500	57000	1/3	208-230	1	60	4570	2.7	1 1/8	7/8	38.38	31.75	39.00	197.00
TCS010S2A*	1	102000	74900	1/3	208-230	1	60	9140	4.8	1 1/8	7/8	38.38	31.75	56.50	254.00
TCS019S2A-2C* ¹	3	184000	135000	1/3	208-230	1	60	12240	6.9	1.625	1.125	38.38	41.63	83.00	381.00
TCS019T3A-2C* ¹	3	184000	135000	1/3	208-230	3	60	12240	4.6	1.625	1.125	38.38	41.63	83.00	381.00

¹ 2 Circuits

UNITED REFRIGERATION INC.

FOLLOW US ON OUR SOCIALS

@UnitedRefrigerationInc

@UnitedRefrigerationInc


@united-refrigeration-inc.

@unitedrefrigerationinc

@unitedrefrigerationinc

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

WALK-IN EVAPORATOR, LOW PROFILE



BEL0060AY6AMAB0403

A2L - BEL LINE LOW PROFILE, AIR DEFROST, MEDIUM TEMP

Part No.	HP	BTUH 25 Deg F at 10 Deg F	Voltage	CFM	Number of Fans	Heater Data		Connection Size (In.)	
						Amps	Watts	Suction	H
BEL0060AY6AMAB0403*	1/20	6500	115	610	1	0.9	55	5/8	21.00
BEL0095AY6AMAB0403*	1/20	8000	115	1305	2	1.8	110	5/8	22.25
BEL0125AY6AMAB0000*	1/20	13000	115	1220	2	1.8	110	7/8	22.25
BEL0125AY6AMAB0403*	1/20	13000	115	1220	2	1.8	110	7/8	22.25



BEL0045BY6EEAB0403

A2L - BEL LINE LOW PROFILE, ELECTRIC DEFROST, LOW TEMP

Part No.	HP	BTUH 20 Deg F at 10 Deg F	Voltage	CFM	Number of Fans	Heater Data		Connection Size (In.)	
						Amps	Watts	Suction	H
BEL0045BY6EEAB0403*	1/20	4700	208-230	641	1	0.5	59	5/8	22.00
BEL0100BY6EEAB0403*	1/20	9000	208-230	1281	2	1.0	118	7/8	22.25
BEL0130BY6EEAB0403*	1/20	12000	208-230	2056	3	1.5	177	7/8	22.25



BEL0045AS6AMAB0000

BEL LINE LOW PROFILE, AIR DEFROST

- Capacity 10°F TD/25°F SST, R404A/R507A
- 2-Speed EC motors standard
- See Document Tab on URI.com for AWEF-compliant applications and capacities

Part No.	HP	BTUH 25 Deg F at 10 Deg F	Voltage	CFM	Number of Fans	Heater Data		Connection Size (In.)	
						Amps	Watts	Suction	H
BEL0045AS6AMAB0000*	1/20	4000	115	653	1	0.9	55	1/2	21.00
BEL0055AS6AMAB0000*	1/20	5200	115	610	1	0.9	55	5/8	22.25
BEL0060AS6AMAB0000*	1/20	6500	115	610	1	0.9	55	5/8	21.00
BEL0095AS6AMAB0000*	1/20	8000	115	1305	2	1.8	110	5/8	21.00
BEL0095AS6AMAB0200*	1/20	8000	115	1305	2	1.8	110	5/8	22.25
BEL0105AS6AMAB0000*	1/20	9200	115	1305	2	1.8	110	5/8	21.00
BEL0115AS6AMAB0000*	1/20	11700	115	1220	2	1.8	110	7/8	22.25
BEL0125AS6AMAB0000*	1/20	13000	115	1220	2	1.8	110	7/8	22.25
BEL0125AS6AMAB0400*	1/20	13000	115	1220	2	1.8	110	7/8	22.25
BEL0155AS6AMAB0000*	1/20	14000	115	1220	3	2.7	165	7/8	22.25
BEL0155AS6AMAB0400*	1/20	14000	115	1958	3	2.7	165	7/8	22.25

Continued on next page

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

WALK-IN EVAPORATOR, LOW PROFILE

Part No.	HP	BTUH 25 Deg F at 10 Deg F	Voltage	CFM	Number of Fans	Heater Data		Connection Size (In.)	
						Amps	Watts	Suction	H
BEL0190AS6AMAB0000*	1/20	18000	115	1830	3	2.7	165	7/8	21.00
BEL0250AS6AMAB0000*	1/20	20800	115	2440	4	3.6	220	7/8	22.25
BEL0295AS6AMAB0000*	1/20	26000	115	3050	5	4.5	275	7/8	25.00
BEL0060BS6AMAB0000*	1/20	6500	208-230	610	1	0.5	55	5/8	22.25
BEL0095BS6AMAB0000*	1/20	8000	208-230	1305	2	1.0	110	5/8	22.25
BEL0095BS6AMAB0200*	1/20	8000	208-230	1305	2	1.0	110	5/8	22.25
BEL0105BS6AMAB0000*	1/20	9200	208-230	1305	2	1.0	110	5/8	22.25
BEL0125BS6AMAB0000*	1/20	13000	208-230	1220	2	1.0	110	7/8	22.25
BEL0155BS6AMAB0000*	1/20	14000	208-230	1958	3	1.5	165	7/8	22.25




BEL0040BS6EEAB0000

BEL LINE LOW PROFILE, ELECTRIC DEFROST

- Capacity 10°F TD/20°F SST, R404A/R507A
- Single Speed EC motors standard
- See Document Tab on URI.com for AWEF-compliant applications and capacities



Part No.	HP	BTUH 20 Deg F at 10 Deg F	Voltage	CFM	Number of Fans	Heater Data		Connection Size (In.)	
						Amps	Watts	Suction	H
BEL0040BS6EEAB0000*	1/20	3500	208-230	685	1	0.5	59	5/8	22.25
BEL0045BS6EEAB0000*	1/20	4700	208-230	641	1	0.5	59	5/8	22.25
BEL0065BS6EEAB0000*	1/20	6500	208-230	1371	2	1.0	110	5/8	21.00
BEL0080BS6EEAB0000*	1/20	7500	208-230	1371	2	1.0	118	5/8	22.25
BEL0100BS6EEAB0000*	1/20	9000	208-230	1281	2	1.0	118	7/8	22.25
BEL0100BS6EEAB0200*	1/20	9000	208-230	1281	2	1.0	118	7/8	22.25
BEL0130BS6EEAB0000*	1/20	12000	208-230	2056	3	1.5	177	7/8	22.25
BEL0130BS6EEAB0200*	1/20	12000	208-230	2056	3	1.5	177	7/8	22.25
BEL0155BS6EEAB0000*	1/20	14000	208-230	1922	3	1.5	177	1 1/8	22.25
BEL0170BS6EEAB0000*	1/20	16000	208-230	2741	4	2.0	236	7/8	22.25
BEL0205BS6EEAB0000*	1/20	18000	208-230	2562	4	2.0	236	1 1/8	22.25
BEL0240BS6EEAB0000*	1/20	20000	208-230	3203	5	2.5	295	1 1/8	25.00
BEL0255BS6EEAB0000*	1/20	24000	208-230	4112	6	3.0	354	1 1/8	25.00



BEC0065AS7AMAB0000

BEC SERIES, CENTER MOUNT EVAPORATOR, AIR DEFROST

- Refrigerants: R404A, R507A, R448A, R449A, R407A, R407F, R407C
- Capacity BTUH 25 @ 10°F T.D. R404A
- 2-Speed EC Motor
- See Document Tab on URI.com for AWEF-compliant applications and capacities



Part No.	HP	BTUH 25 Deg F at 10 Deg F	Voltage	CFM	Number of Fans	Heater Data		Connection Size (In.)	
						Amps	Watts	Suction	H
BEC0065AS7AMAB0000*	1/20	5200	115	610	1	0.8	55	1 1/8	20.00
BEC0130AS7AMAB0000*	1/20	9100	115	1220	2	1.7	110	1 1/8	20.00
BEC0175AS7AMAB0000*	1/20	10800	115	1830	3	2.5	165	1 1/8	20.00
BEC0200AS7AMAB0000*	1/20	13400	115	1830	3	2.5	165	1 1/8	20.00
BEC0285AS7AMAB0000*	1/20	20800	115	2440	4	3.4	220	1 1/8	20.00

Continued on next page

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

Part No.	HP	BTUH 25 Deg F at 10 Deg F	Voltage	CFM	Number of Fans	Heater Data		Connection Size (In.)	
						Amps	Watts	Suction	H
BEC0225AS7AMAB0000*	1/20	22300	115	1830	3	2.5	165	1 1/8	20.00
BEC0130BS7AMAB0000*	1/20	9100	208-230	1220	2	0.8	110	1 1/8	20.00
BEC0175BS7AMAB0000*	1/20	10800	208-230	1830	3	1.3	165	1 1/8	20.00



BEC SERIES, CENTER MOUNT EVAPORATOR, ELECTRIC DEFROST

- Refrigerants: R404A, R507A, R448A, R449A, R407A, R407F, R407C
- Capacity BTUH 25 @ 10°F T.D. and BTUH -20°F at 10°F T.D. @ R404A
- See Document Tab on URI.com for AWEF-compliant applications and capacities



Part No.	HP	BTUH -20 Deg F at 10 Deg F	BTUH 25 Deg F at 10 Deg F	Voltage	CFM	Number of Fans	Heater Data		Connection Size (In.)	
							Amps	Watts	Suction	H
BEC0075BS6EMAB0000*	1/20	6500	7450	208-230	1220	2	0.8	110	1 1/8	20.00
BEC0120BS6EMAB0000*	1/20	9000	10350	208-230	1830	3	1.3	165	1 1/8	20.00
BEC0135BS6EMAB0000*	1/20	13000	14950	208-230	1830	3	1.3	165	1 1/8	20.00
BEC0180BS6EMAB0000*	1/20	17400	20000	208-230	2440	4	1.7	220	1 1/8	20.00

WALK-IN EVAPORATOR, LOW VELOCITY



CENTER MOUNT EVAPORATOR, LOW VELOCITY, AIR DEFROST, BEV SERIES

- Refrigerants: R404A, R507A, R448A, R449A, R407A, R407F, R407C
- Capacity BTUH 25 @ 10°F T.D. R404A
- 2-Speed EC Motor
- See Document Tab on URI.com for AWEF-compliant applications and capacities



Part No.	HP	Capacity (BTUH)	Voltage	CFM	Number of Fans	Heater Data		Connection Size (In.)	
						Amps	Watts	Suction	H
BEV0080AS6AMAB0000*	1/20	8050	115	725	1	0.8	55	1 3/8	24.50
BEV0125AS6AMAB0000*	1/20	12150	115	1450	2	1.7	110	1 3/8	24.50
BEV0160AS6AMAB0000*	1/20	15950	115	1450	2	1.7	110	1 3/8	24.50
BEV0180AS6AMAB0000*	1/20	17850	115	2175	3	2.5	165	1 3/8	24.50
BEV0215AS6AMAB0000*	1/20	21450	115	2175	3	2.5	165	1 3/8	24.50



CENTER MOUNT EVAPORATOR, LOW VELOCITY, ELECTRIC DEFROST, BEV SERIES

- Refrigerants: R404A, R507A, R448A, R449A, R407A, R407F, R407C
- Capacity BTUH 25 @ 10°F T.D. R404A
- 2-Speed EC Motor
- See Document Tab on URI.com for AWEF-compliant applications and capacities



Part No.	HP	Capacity (BTUH)	Voltage	CFM	Number of Fans	Heater Data		Connection Size (In.)	
						Amps	Watts	Suction	H
BEV0160BS6EMAB0000*	1/20	15950	208-230	1450	2	0.8	55	1 3/8	24.50



*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

AIR COOLED CONDENSING UNIT, OUTDOOR, SCROLL



BCH0005MBACZA0000

BCH LINE MEDIUM TEMPERATURE R404A R407A R407C R448A R449A R507



REFRIGERATION EQUIPMENT

Part No.	HP	Voltage	Phase	Hertz	Motor FLA	MCA (Amps)	Number of Fans	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
									Suction	Liquid	L	W	H	
BCH0005MBACZA0000*	0.5	208-230	1	60	0.5	15.0	1	9	5/8	3/8	31.25	34.00	27.50	167.00
BCH0008MBACZA0000*	3/4	208-230	1	60	0.5	15.0	1	9	5/8	3/8	31.25	34.00	27.50	168.00
BCH0010MBACZA0000*	1	208-230	1	60	0.5	15.0	1	9	5/8	3/8	31.25	34.00	27.50	179.00
BCH0015MBACZA0000*	1.5	208-230	1	60	1.0	15.0	2	14	7/8	1/2	45.25	34.00	27.50	221.00
BCH0020MBACZA0000*	2	208-230	1	60	1.0	20.0	2	14	7/8	1/2	45.25	34.00	27.50	221.00
BCH0030MBACZA0000	3	208-230	1	60	3.5	29.5	1	20	7/8	1/2	50.00	36.00	37.00	297.00
BCH0055MBACZA0000*	5	208-230	1	60	3.5	39.2	1	20	1 1/8	1/2	50.00	36.00	37.00	332.00
BCH0008MCACZA0000*	3/4	208-230	3	60	0.5	15.0	1	9	5/8	3/8	31.25	34.00	27.50	168.00
BCH0010MCACZA0000*	1	208-230	3	60	0.5	15.0	1	9	5/8	3/8	31.25	34.00	27.50	179.00
BCH0015MCACZA0000*	1.5	208-230	3	60	1.0	15.0	2	14	7/8	1/2	45.25	34.00	27.50	221.00
BCH0020MCACZA0000*	2	208-230	3	60	1.0	15.0	2	14	7/8	1/2	45.25	34.00	27.50	221.00
BCH0025MCACZA0000*	2	208-230	3	60	1.0	20.0	2	14	7/8	1/2	45.25	34.00	27.50	230.00
BCH0030MCACZA0000*	3	208-230	3	60	3.5	20.6	1	20	7/8	1/2	50.00	36.00	37.00	297.00
BCH0035MCACZA0000*	3	208-230	3	60	3.5	20.9	1	20	7/8	1/2	50.00	36.00	37.00	300.00
BCH0045MCACZA0000*	4	208-230	3	60	3.5	26.5	1	20	1 1/8	1/2	50.00	36.00	37.00	327.00
BCH0050MCACZA0000*	5	208-230	3	60	3.5	28.5	1	20	1 1/8	1/2	50.00	36.00	37.00	330.00
BCH0055MCACZA0000*	5	208-230	3	60	3.5	27.5	1	20	1 1/8	1/2	50.00	36.00	37.00	332.00
BCH0060MCACZA0000*	6	208-230	3	60	3.5	30.3	1	20	1 1/8	1/2	50.00	36.00	37.00	335.00



BCH0025LBACZA0200

BCH LINE LOW TEMPERATURE R404A R407A R407C R407F R448A R449A R507



Part No.	HP	Voltage	Phase	Hertz	Motor FLA	MCA (Amps)	Number of Fans	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
									Suction	Liquid	L	W	H	
BCH0025LBACZA0200*	2	208-230	1	60	1.0	20.0	2	14	7/8	1/2	45.25	34.00	27.50	230.00
BCH0025LCACZA0200*	2	208-230	3	60	1.0	15.0	2	14	7/8	1/2	45.25	34.00	27.50	230.00
BCH0055LCACZA0300*	5	208-230	3	60	3.5	24.7	1	20	7/8	1/2	50.00	36.00	37.00	323.00
BCH0060LCACZA0300*	6	208-230	3	60	3.5	30.3	1	20	7/8	1/2	50.00	36.00	37.00	327.00
BCH0022LDACZA0200	2	460	3	60	0.5	15.0	2	9	5/8	3/8	31.25	34.00	27.50	173.00



*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

AIR COOLED CONDENSER



DVT0011

DIRECT DRIVE, VERTICAL/HORIZONTAL

- Industrial-duty modular design for strength in a compact size
- High efficiency condenser coils of aluminum fins/copper tubes
- Energy-efficient, thermally protected motors
- Fully baffled fan sections provide structural strength and prevent fan windmilling in the off cycle
- Voltage: 208-230/1/60
- 1075 RPM motor
- Adjustable height 40 1/2" to 49 1/2" (DVT0051 and larger)



		Capacity THR (BTUH)							Connection OD (In.)		Dimensions (In.)			
Part No.	Number of Fans	R22 20°F TD	R404A 15°F TD	Voltage	Phase	Hertz	CFM	MCA (Amps)	Inlet	Outlet	H	W	L	Ship Wgt (Lbs.)
DVT0011* ¹	1	15200	11172	208-230	1	60	2400	2.5	3/8	3/8	34.00	26.00	52.00	112.00
¹ + = plus fan guard height														

¹ + = plus fan guard height



UNITED REFRIGERATION INC.
INTRODUCING URI.COM:
YOUR ULTIMATE HVAC/R
RESOURCE HUB!



Seamless Access to HVAC/R Essentials:
Discover Account Pricing, Technical Documents, Current Stock and more on URI.COM



REGISTER TODAY!

Join our community of HVAC/R professionals who are already benefiting from the power of URI.COM. Elevate your skills, streamline your operations, and stay on top of industry trends.



Real Time Stock Information
Plan your projects efficiently with up-to-date stock levels.



Technical Documents
Access installation guides, troubleshooting manuals, and more for enhanced productivity.



Account Pricing
Streamline your procurement process with transparent and consistent pricing



Replacement Parts & Supersedes
Ensure compatibility and efficiency with the most up-to-date components.

 *WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

WALK-IN EVAPORATOR, LOW PROFILE



LEL LINE LOW PROFILE, ELECTRIC DEFROST

- Capacity 10°F TD/20°F SST, R404A/R507A
- Single Speed EC motors standard
- See Document Tab on URI.com for AWEF-compliant applications and capacities



Part No.	HP	BTUH 20 Deg F at 10 Deg F	Voltage	CFM	Number of Fans	Heater Data		Connection Size (In.)	
						Amps	Watts	Suction	H
LEL0100BS6EEAB0000*	1/20	9000	208-230	1281	2	1.0	118	7/8	22.25
LEL0100BS6EEAB0200*	1/20	9000	208-230	1281	2	1.0	118	7/8	22.25
LEL0130BS6EEAB0000*	1/20	12000	208-230	2056	3	1.5	177	7/8	22.25



LEL LINE LOW PROFILE, AIR DEFROST

- Capacity 10°F TD/25°F SST, R404A/R507A
- 2-Speed EC motors standard
- See Document Tab on URI.com for AWEF-compliant applications and capacities



Part No.	HP	BTUH 25 Deg F at 10 Deg F	Voltage	CFM	Number of Fans	Heater Data		Connection Size (In.)	
						Amps	Watts	Suction	H
LEL0060AS6AMAB0000*	1/20	6500	115	610	1	0.9	55	5/8	21.00
LEL0095AS6AMAB0000*	1/20	8000	115	1305	2	1.8	110	5/8	21.00
LEL0095AS6AMAB0400*	1/20	8000	115	1305	2	1.8	110	5/8	22.25
LEL0105AS6AMAB0000*	1/20	9200	115	1305	2	1.8	110	5/8	21.00
LEL0105AS6AMAB0400*	1/20	9200	115	1305	2	1.8	110	5/8	22.25
LEL0115AS6AMAB0000*	1/20	11700	115	1220	2	1.8	110	7/8	22.25
LEL0125AS6AMAB0000*	1/20	13000	115	1220	2	1.8	110	7/8	22.25
LEL0125AS6AMAB0400*	1/20	13000	115	1220	2	1.8	110	7/8	22.25
LEL0155AS6AMAB0000*	1/20	14000	115	1220	3	2.7	165	7/8	22.25
LEL0190AS6AMAB0000*	1/20	18000	115	1830	3	2.7	165	7/8	21.00
LEL0250AS6AMAB0000*	1/20	20800	115	2440	4	3.6	220	7/8	22.25



CENTER MOUNT EVAPORATOR, AIR DEFROST, LEC SERIES

- Air Defrost
- Refrigerants: R404A, R507A, R448A, R449A, R407A, R407F, R407C
- Capacity BTUH 25 @ 10°F T.D. R404A
- 2-Speed EC Motor
- See Document Tab on URI.com for AWEF-compliant applications and capacities



Part No.	HP	BTUH 25 Deg F at 10 Deg F	Voltage	CFM	Number of Fans	Heater Data		Connection Size (In.)	
						Amps	Watts	Suction	H
LEC0130AS7AMAB0000*	1/20	9100	115	1220	2	1.7	110	1 1/8	20.00
LEC0175AS7AMAB0000*	1/20	10800	115	1830	3	2.5	165	1 1/8	20.00
LEC0200AS7AMAB0000*	1/20	13400	115	1830	3	2.5	165	1 1/8	20.00



*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

REACH-IN EVAPORATOR



U0090AB

DUAL-AIRE, AIR DEFROST

- Used whenever a small, compact unit is required. It can be mounted on the ceiling or wall.
- Draws air through the front and discharges it out both sides to insure proper distribution of cool air and thus maintain uniform box temperature
- Twin air flow cooling
- Cabinet assembled with stainless steel screws
- Full collar aluminum fins on expanded copper tubes
- All sizes UL component recognized, NSF approved
- UK models have coated coils
- Voltage: 115/1/60
- Height less drain spud: 1 7/16"
- Connection: ODS Suction x Flare Inlet
- Capacity @ 10°F TD

- Textured aluminum cabinet



Part No.	BTUH 25 Deg F at 10 Deg F	Voltage	Phase	Hertz	CFM	Motor Data		Connection Size (In.)	Dimensions (In.)			Ship Wgt (Lbs.)
						Qty	FLA	Suction	H	W	L	
U0090AB*	850	115	1	60	190	1	0.5	3/8	8.50	8.88	11.50	8.00
U0120AB*	1150	115	1	60	250	1	0.5	3/8	8.50	8.88	17.50	10.00
U0150AB*	1500	115	1	60	310	1	1.1	3/8	9.50	10.88	17.50	12.00
UK0090AB* ¹	850	115	1	60	190	1	0.5	3/8	11.50	10.00	14.00	9.04
UK0120AB* ¹	1150	115	1	60	250	1	0.5	3/8	8.50	8.88	17.50	10.00
UK0150AB* ¹	1500	115	1	60	310	1	1.1	3/8	9.50	10.88	17.50	12.00

¹ w/ coated coil



VAE6AG

VEE-AIRE, AIR DEFROST

- Designed for use in small reach-ins, back bar and under counter refrigerators
- The unit can be mounted from the ceiling or off the back wall or end walls
- Attractive grained aluminum cabinet
- Expansion valve mounts inside cabinets
- All models UL listed and CSA certified
- Certified to NSF
- VAK models have coated coils
- Height less drain spud: (1 7/16")
- Width less mounting and suction connection
- Connection: IDS Suction x ODS Inlet
- Capacity @ 10°F TD

- Molded Lexan® fan guard
- Plate-type aluminum fins with full collars on expanded copper tubes



Part No.	BTUH 25 Deg F at 10 Deg F	Voltage	Phase	Hertz	CFM	Motor Data		Connection Size (In.)	Dimensions (In.)			Ship Wgt (Lbs.)
						Qty	FLA	Suction	H	W	L	
VAE6AG*	600	115	1	60	135	1	0.8	3/8	6.88	8.13	12.50	7.00
VAE8AG*	800	115	1	60	130	1	0.8	3/8	6.88	8.13	12.25	7.00
VA12AG*	1200	115	1	60	265	2	1.6	3/8	11.00	8.75	22.75	11.00
VA17AG*	1700	115	1	60	245	1	1.0	3/8	9.75	10.50	14.00	13.00
VAK06AG* ¹	600	115	1	60	135	1	0.8	3/8	6.88	8.13	12.50	7.00
VAK08AG* ¹	800	115	1	60	130	1	0.8	3/8	10.00	8.75	12.25	7.00
VAK12AG* ¹	1200	115	1	60	265	2	1.6	3/8	11.00	8.75	23.00	11.00
VAK17AG* ¹	1700	115	1	60	245	1	1.0	3/8	13.00	12.25	18.75	13.00

¹ w/ coated coil

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

REACH-IN EVAPORATOR



TA10AG

TOP-AIRE, AIR DEFROST

Thin unit which mounts in the top of a refrigerator and makes the entire top shelf area usable. The attractive low silhouette makes the Top-Aire particularly desirable for display type refrigerators. It can also be used in back bars, under

counter cabinets or wherever space is at a premium.

- TAK models have coated coils

- All models UL listed, CSA certified, and certified to NSF standards
- Attractive grained aluminum cabinet
- Drain fitting mounted at 45° - drain can be run through back or bottom of refrigerator
- Room for expansion valve inside - out of sight
- Capacity @ 10°F TD
- Connection: IDS Suction x ODS Inlet
- Width includes mounting lugs (2")



Part No.	BTUH 25 Deg F at 10 Deg F	Voltage	Phase	Hertz	CFM	Motor Data		Connection Size (In.)	Dimensions (In.)			Ship Wgt (Lbs.)
						Qty	FLA	Suction	H	W	L	
TA10AG*	1000	115	1	60	110	1	0.8	3/8	4.50	15.50	16.50	12.00
TA13AG*	1300	115	1	60	205	2	1.6	3/8	4.50	15.50	20.50	16.00
TA17AG*	1700	115	1	60	205	2	1.6	3/8	4.50	16.50	24.00	18.00
TA23AG*	2300	115	1	60	315	3	2.4	3/8	4.50	16.50	31.63	24.00
TA30AG*	3000	115	1	60	320	3	2.4	1/2	4.50	16.50	40.00	28.00
TA43AG*	4300	115	1	60	425	4	3.2	5/8	6.50	16.50	53.38	32.00
TA55AG*	5500	115	1	60	545	5	4.0	5/8	6.50	16.50	53.38	43.00
TAK10AG* ¹	1000	115	1	60	110	1	0.8	3/8	7.25	17.00	17.25	12.00
TAK13AG* ¹	1300	115	1	60	205	2	1.6	3/8	4.50	15.50	20.50	16.00
TAK17AG* ¹	1700	115	1	60	205	2	1.6	3/8	7.80	18.00	24.50	18.00
TAK23AG* ¹	2300	115	1	60	315	3	2.4	3/8	4.50	16.50	31.63	24.00
TAK30AG* ¹	3000	115	1	60	320	3	2.4	1/2	4.50	16.50	40.00	28.00
TAK43AG* ¹	4300	115	1	60	425	4	3.2	5/8	6.50	16.50	53.38	32.00
TAK55AG* ¹	5500	115	1	60	545	5	4.0	5/8	6.50	16.50	53.38	43.00
TAK30BG* ¹	3000	208-230	1	60	320	3	2.4	1/2	8.00	18.00	41.50	28.00

¹ w/ coated coil



TL09AG

TOP-AIRE, ELECTRIC DEFROST

The TL low temperature cooler has a completely automatic defrost system. Having a normal operating range of +15°F to -20°F, this unit is ideally suited for such applications as commercial freezers, ice cream boxes, bakery freezers and

dual-temp reach-in boxes. The electric defrost system incorporates the use of high quality tubular heaters having

exceptionally long life. The Incoloy (high nickel-steel alloy) sheath gives lasting protection from oxidation and corrosion. Defrost termination and fan delay control, terminal block and junction box are mounted inside the cabinet.

- Plate type aluminum fins with full collars — copper tubes
- Capacity @ 10°F T.D.
- Connection: IDS Suction x ODS Inlet
- Width includes mounting lugs (2")



Part No.	Voltage	Phase	Hertz	CFM	Motor Data		Connection Size (In.)	Dimensions (In.)			Ship Wgt (Lbs.)
					Qty	FLA	Suction	H	W	L	
TL09AG*	115	1	60	110	1	0.8	3/8	4.50	15.50	16.50	13.00
TL12AG*	115	1	60	210	2	1.6	1/2	4.50	15.50	20.50	17.00
TL16AG*	115	1	60	210	2	1.6	1/2	4.50	16.50	24.00	20.00
TL21AG*	115	1	60	240	1	1.0	1/2	6.75	18.50	24.00	24.00
TL28AG*	115	1	60	335	3	1.2	1/2	10.25	18.00	32.75	28.00
TL09BG*	208-230	1	60	110	1	1.4	3/8	4.50	15.50	16.50	13.00
TL28BG*	208-230	1	60	335	3	1.2	1/2	10.25	18.00	32.75	28.00
TL35BG*	208-230	1	60	420	2	1.0	5/8	6.75	18.50	38.38	31.00
TL53BG*	208-230	1	60	595	3	1.5	7/8	6.75	18.50	49.13	47.00

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov



C13AG

HIGH PROFILE, AIR DEFROST

A thin unit which mounts on top of a refrigerator and makes the entire top shelf area usable. The attractive low silhouette makes the Top-Aire particularly desirable for display type refrigerators. It can also be used in back bars, under

counter cabinets or wherever space is at a premium.

- CK models have coated coils

- All models UL listed, CSA certified and certified to NSF standards
- Attractive grained aluminum cabinet
- Drain fitting mounted at 45° - drain can be run through back or bottom of refrigerator
- Room for expansion valve inside
- Depth: 15 3/4" includes top mounting lugs (2")
- Height: 8 7/8"
- Connection: IDS Suction x ODS Inlet
- Capacity at 10°F T.D.



						Motor Data		Connection Size (In.)	Dimensions (In.)			
Part No.	BTUH 25 Deg F at 10 Deg F	Voltage	Phase	Hertz	CFM	Qty	FLA	Suction	H	W	L	Ship Wgt (Lbs.)
C13AG*	1300	115	1	60	235	1	1.0	3/8	8.88	15.75	14.25	15.00
C17AG*	1700	115	1	60	250	1	1.0	1/2	8.88	15.75	17.25	17.00
C23AG*	2300	115	1	60	265	1	1.0	1/2	8.88	15.75	22.75	20.00
C30AG*	3000	115	1	60	480	2	2.0	1/2	8.88	15.75	27.75	26.00
C43AG*	4300	115	1	60	520	2	2.0	1/2	8.88	15.75	38.00	33.00
CK13AG* ¹	1300	115	1	60	235	1	1.0	3/8	8.88	15.75	14.25	15.00
CK17AG* ¹	1700	115	1	60	250	1	1.0	1/2	8.88	15.75	17.25	17.00
CK23AG* ¹	2300	115	1	60	265	1	1.0	1/2	8.88	15.75	22.75	20.00
CK30AG* ¹	3000	115	1	60	480	2	2.0	1/2	8.88	15.75	27.75	26.00
CK43AG* ¹	4300	115	1	60	520	2	2.0	1/2	8.88	15.75	38.00	33.00

¹ w/ coated coil



KMK13AG

MULLION, AIR DEFROST

Ideal for under-counter reach-in refrigerators. The thin line design allows the unit to be mounted behind the mullion with sufficient clearance for tray slides. A down

flow fan arrangement is used with air drawn in at the top and discharged at the bottom.

- Ideal for bottled goods and beverage coolers
- Coated coil
- Capacity at 10°F T.D.
- Connection: IDS Suction x ODS Inlet
- Height less drain spud: (7/8")



						Motor Data		Connection Size (In.)	Dimensions (In.)			
Part No.	BTUH 25 Deg F at 10 Deg F	Voltage	Phase	Hertz	CFM	Qty	FLA	Suction	H	W	L	Ship Wgt (Lbs.)
KMK13AG*	1300	115	1	60	180	2	1.6	3/8	17.75	5.63	16.88	16.00
KMK17AG*	1700	115	1	60	170	2	1.6	3/8	19.75	5.63	16.88	18.00
KMK23AG*	2300	115	1	60	255	3	2.4	1/2	19.75	5.63	23.25	23.00

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

HEATCRAFT REFRIGERATION

REACH-IN EVAPORATOR

REFRIGERATION EQUIPMENT



RAMK13AG

REVERSE MULLION, AIR DEFROST

An upflow air pattern is used with air drawn in at the bottom and discharged out at the top. This provides optimum temperature for drop in trays on salad bars or prep tables. An adjustable and detachable air deflector - splash


protector is included. The deflector can be adjusted to direct

the air up and out at a 45° angle. This feature provides excellent air distribution over drop trays or containers. The deflector can be adjusted to distribute air out both sides when used as a mullion unit.

- Coated coils
- Capacity @ 10°F T.D.
- Connection: IDS Suction x ODS Inlet
- Height less drain spud (7/8")



Part No.	BTUH 25 Deg F at 10 Deg F	Voltage	Phase	Hertz	CFM	Motor Data		Connection Size (In.)	Dimensions (In.)			Ship Wgt (Lbs.)
						Qty	FLA	Suction	H	W	L	
RAMK13AG*	1300	115	1	60	180	2	1.6	3/8	6.75	16.50	24.00	16.00
RAMK17AG*	1700	115	1	60	170	2	1.6	3/8	7.10	16.60	24.00	18.00
RAMK23AG*	2300	115	1	60	255	3	2.4	1/2	19.75	5.63	23.25	23.00
RAMK23BG*	2300	208-230	1	60	255	3	1.2	1/2	7.25	23.25	24.50	23.00



BBM11AG

BACK BAR, AIR DEFROST

- Suitable for under counter reach-in fixtures
- Top discharge with adjustable air deflector
- BBMM master units include TXV, Solenoid, Thermostat

- BBMS slave units include TXV
- BBM are basic units
- Connection: ODS Suction x Flare Inlet
- Capacity @ 10°F TD



Part No.	BTUH 25 Deg F at 10 Deg F	Voltage	Phase	Hertz	CFM	Motor Data		Connection Size (In.)	Dimensions (In.)			Ship Wgt (Lbs.)
						Qty	FLA	Suction	H	W	L	
BBM11AG*	1100	115	1	60	90	1	0.4	3/8	14.00	5.50	19.75	13.00
BBM16AG*	1600	115	1	60	180	2	1.6	3/8	14.00	5.50	26.25	19.00
BBMM11AG*	1100	115	1	60	90	1	0.8	3/8	7.50	17.25	25.50	14.00
BBM11AIOB404G	1100	115	1	60	90	1	0.8	3/8	7.50	17.25	25.50	15.00
BBM11AIOB407G	1100	115	1	60	90	1	0.8	3/8	7.50	17.25	25.50	15.00
BBM16AIOB404G	1600	115	1	60	180	2	1.6	3/8	7.50	17.25	32.00	21.00
BBM16AIOB407G	1600	115	1	60	180	2	1.6	3/8	7.50	17.25	32.00	21.00



*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov



BBL10AG

BACK BAR, ELECTRIC DEFROST

- Master units include TXV, Solenoid, Thermostat
- Slave units include TXV
- Voltage: 115/1/60
- Connection: ODS
- Capacity @ 10°F TD, -10°F SST



Part No.	Voltage	Phase	Hertz	CFM	Motor Data		Connection Size (In.)	Dimensions (In.)			Ship Wgt (Lbs.)
					Qty	FLA	Suction	H	W	L	
BBL10AG*	115	1	60	90	1	0.8	3/8	7.50	17.25	25.50	16.00
BBL15AG*	115	1	60	180	2	1.6	3/8	7.50	17.25	32.00	20.00



BT009AG

TWIN COIL, AIR DEFROST



Part No.	BTUH 25 Deg F at 10 Deg F	Voltage	Phase	Hertz	CFM	Motor Data		Connection Size (In.)	Dimensions (In.)			Ship Wgt (Lbs.)
						Qty	FLA	Suction	H	W	L	
BT009AG*	900	115	1	60	130	1	0.8	1/2	4.88	16.13	19.13	12.00
BT013AG*	1300	115	1	60	240	2	1.6	1/2	5.75	16.13	19.13	15.00
BT018AG*	1800	115	1	60	255	1	1.0	1/2	5.75	16.13	19.13	16.00
BT025AG*	2500	115	1	60	460	2	2.0	1/2	6.75	18.13	26.13	23.00
BT035AG*	3500	115	1	60	425	2	2.0	1/2	6.75	18.13	26.13	25.00
BT045AG*	4500	115	1	60	550	2	2.0	1/2	9.25	21.13	29.13	35.00
BT055AG*	5500	115	1	60	730	1	2.0	1/2	8.50	21.13	29.13	35.00
BTOK09AG* ¹	900	115	1	60	130	1	0.8	1/2	4.88	16.13	19.13	12.00
BTOK13AG* ¹	1300	115	1	60	240	2	1.6	1/2	5.75	16.13	19.13	15.00
BTOK18AG* ¹	1800	115	1	60	255	1	1.0	1/2	5.75	16.13	19.13	16.00
BTOK25AG* ¹	2500	115	1	60	460	2	2.0	1/2	9.00	19.25	27.25	23.00
BTOK35AG* ¹	3500	115	1	60	425	2	2.0	1/2	9.00	19.25	27.25	25.00
BTOK55AG* ¹	5500	115	1	60	730	1	2.1	1/2	11.50	22.25	30.25	35.00

¹ w/ coated coil

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

AIR COOLED CONDENSING UNIT, INDOOR, HERMETIC

M-LINE CONDENSING UNITS

A labor cost savings solution...a fractional horsepower condensing unit with factory installed components significantly reduces on-site tube prepping, brazing, supplies and materials. In addition, it diminishes the need for frequent leak inspections since all filter drier and moisture indicator braze joints have been factory tested. Fewer job site problems and fewer call

backs. Units with pressure controls have the new Emerson™ Electronic Unit Control (EUC) that allows pressure settings to be set and verified in less than a minute. Fractional units reduce installation costs, reduce call backs and cut warranty expense.

REFRIGERATION EQUIPMENT



M7JHH020IAA177

HIGH TEMPERATURE (1/8 TO 1 HP), VALUE ADD R134A R450A R513A

COPELAND

Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
						Suction	Liquid	L	W	H	
M7JHH020IAA177	1/4	115	1	60	6.8	3/8 S	1/4 S	14.00	10.00	12.00	35.00
M7JHH029IAA177*	1/3	115	1	60	9.3	3/8 S	1/4 S	13.96	11.56	9.67	90.00
M7JHH029IAA179*	1/3	115	1	60	9.3	3/8 S	1/4 S	13.96	11.56	9.67	36.00
M7JHH042IAA177*	1/3	115	1	60	12.3	3/8 S	1/4 S	14.40	11.45	11.37	32.00
M7KH0086CFA072*	1	115	1	60	19.0	5/8 S	3/8 S	24.00	16.39	13.08	88.00
M7KH0075CFV177*	3/4	208-230	1	60	9.3	5/8 S	3/8 S	13.96	11.56	9.67	86.00
M7KH0086CFV072*	1	208-230	1	60	11.2	5/8 S	3/8 S	24.00	16.39	13.08	85.00
M7KH0086CFV177*	1	208-230	1	60	11.2	5/8 S	3/8 S	24.00	16.39	13.08	81.32
M7TH0036IAA118	1/3	115	1	60	10.6	5/16	1/4	19.00	9.40	10.50	40.00
M7ZHH046IAA177*	1/2	115	1	60	12.8	1/2 S	3/8 S	17.45	13.46	11.71	42.00
M7ZHH046IAA179*	1/2	115	1	60	12.8	1/2 S	1/4 S	17.45	13.46	11.71	51.00
M7ZHH055CFA177*	1/2	115	1	60	14.6	5/8 S	3/8 S	17.31	13.56	11.70	73.00
M7ZHH055CFA179*	1/2	115	1	60	14.6	5/8 S	3/8 S	17.31	13.56	11.70	59.00
M7ZHH067CFA272*	2/3	115	1	60	17.1	5/8 S	3/8 S	17.31	13.82	12.29	73.00
M7ZHH046IAV177*	1/2	208-230	1	60	6.0	1/2 S	3/8 S	17.45	13.46	11.71	24.00
M7ZHH055CAV177*	1/2	208-230	1	60	8.6	1/2 S	3/8 S	17.31	13.56	11.70	65.00
M7ZHH067CFV272*	2/3	208-230	1	60	8.7	5/8 S	3/8 S	17.31	13.82	12.29	67.00



M6GPH064CAA177

EXTENDED MEDIUM TEMPERATURE (3/4 TO 1 HP), VALUE ADD R404A R407C R448A R449A

COPELAND

Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
						Suction	Liquid	L	W	H	
M6GPH064CAA177*	2/3	115	1	60	14.8	1/2 S	3/8 S	18.86	14.34	11.79	42.00
M6GPH064CAV177*	2/3	208-230	1	60	7.6	1/2 S	3/8 S	18.86	14.34	11.79	68.00
M6KP0075CFA072*	3/4	115	1	60	20.8	1/2 S	3/8 S	24.00	16.39	13.08	48.00
M6KP0092CFA072*	1	115	1	60	20.3	1/2 S	3/8 S	24.00	16.39	13.08	46.00
M6KP0075CAV072*	3/4	208-230	1	60	9.7	1/2 S	3/8 S	24.00	16.39	13.08	85.00

Continued on next page

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
						Suction	Liquid	L	W	H	
M6KP0092CAV072*	1	208-230	1	60	12.4	1/2 S	3/8 S	24.00	16.39	13.08	82.00
M6KP0102CAV072*	1	208-230	1	60	12.7	1/2 S	3/8 S	24.00	18.30	16.17	66.00
M6KP0106CFV072*	1	208-230	1	60	12.8	5/8 S	3/8 S	24.00	16.39	13.08	91.00
M6KP0106TAC072*	1	208-230	3	60	8.3	5/8 S	3/8 S	24.00	16.39	13.08	85.00
M6KP0112CFV072*	1	208-230	1	60	11.0	5/8 S	3/8 S	24.00	18.30	16.16	104.00
M6KP0112TAC072*	1	208-230	3	60	8.3	5/8 S	3/8 S	24.00	18.30	16.16	42.00
M6KP0127CFV072*	1 1/4	208-230	1	60	13.0	5/8 S	3/8 S	24.00	18.30	16.16	98.00
M6ZP0053IAA177*	1/2	115	1	60	14.0	1/2 S	3/8 S	15.67	12.12	11.37	70.00
M6ZP0053IAV177*	1/2	208-230	1	60	7.2	1/2 S	3/8 S	15.67	12.12	11.37	42.00



M6JM0017IAA177

MEDIUM TEMPERATURE (1/6 TO 1/2 HP), VALUE ADD R404A R407C R448A R449A

COPELAND

Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
						Suction	Liquid	L	W	H	
M6JM0017IAA177*	1/6	115	1	60	5.7	3/8 S	1/4 S	13.91	11.32	9.67	39.00
M6JM0017IAA179*	1/6	115	1	60	5.7	3/8 S	1/4 S	13.91	11.32	9.67	45.00
M6TM0022IAA118*	1/4	115	1	60	6.7	5/16 S	1/4 S	16.00	13.00	11.00	35.00
M6JMH023IAA177*	1/4	115	1	60	6.7	3/8 S	1/4 S	13.91	11.32	9.67	52.00
M6ZM0025IAV177*	1/4	208-230	1	60	4.4	3/8 S	1/4 S	16.50	12.70	11.70	45.00
M6TM0027IAA118*	1/4	115	1	60	8.2	5/16 S	1/4 S	16.00	13.00	11.00	34.00
M6JMH028IAA177*	1/4	115	1	60	8.2	3/8 S	1/4 S	13.91	11.32	9.67	40.00
M6JMH028IAA179*	1/4	115	1	60	8.2	3/8 S	1/4 S	13.91	11.32	9.67	40.00
M6JMH035IAA179	1/3	115	1	60	9.7	3/8 S	1/4 S	18.86	14.34	11.79	85.00
M6JMH035IAA177	1/3	115	1	60	9.7	3/8 S	1/4 S	18.86	14.34	11.79	85.00
M6JMH043IAA177*	1/2	115	1	60	13.2	3/8 S	1/4 S	14.40	11.45	11.37	40.00
M6JMH035IAV177	1/3	208-230	1	60	5.5	3/8	1/4	18.86	14.34	11.79	50.00
M6JMH043CAV078*	1/2	208-230	1	60	7.7	3/8 S	1/4 S	16.56	13.06	11.74	75.00
M6QMH049IAA272*	1/2	115	1	60	13.4	3/8 S	1/4 S	15.70	12.00	11.40	47.26
M6QMH049CAV078*	1/2	208-230	1	60	7.7	3/8 S	1/4 S	15.70	12.00	11.40	45.00



M6JL0021IAA177

LOW TEMPERATURE (1/5 TO 1/2 HP), VALUE ADD R404A R448A R449A

COPELAND

Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
						Suction	Liquid	L	W	H	
M6JL0021IAA177*	1/5	115	1	60	5.5	3/8 S	1/4 S	14.10	11.40	11.40	46.00
M6JLH030IAA177*	1/3	115	1	60	5.9	3/8 S	1/4 S	14.10	11.40	11.40	43.00
M6JLH030IAA179*	1/3	115	1	60	5.9	3/8 S	1/4 S	14.10	11.40	11.40	42.00
M6JLH041IAA177*	1/3	115	1	60	8.2	3/8 S	1/4 S	14.40	11.60	11.40	46.00
M6PL0052IAA177*	1/2	115	1	60	8.5	3/8 S	1/4 S	19.90	11.10	11.20	46.47
M6ZLH032IAA078	1/3	115	1	60	6.1	3/8	1/4	16.50	13.10	11.70	41.00
M6ZL0055IAV177*	1/2	208-230	1	60	6.0	3/8 S	1/4 S	16.58	11.70	13.10	53.00

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

AIR COOLED CONDENSING UNIT, INDOOR, SCROLL



FFAPA16ZCFV072

EXTENDED MEDIUM TEMPERATURE (3/4 TO 1 1/4 HP), SCROLL R134A R404A R407A R407C R448A R449A

- Improved efficiency from 10%-15% annually
 - Optimized for multiple applications
 - Receiver capacity (Lbs 90% Volume) rated for R404A
- Equipped with electronic unit

- Reduces potential service costs
- AWEF scores for walk-in cooler applications are available under the document tab on www.uri.com
- 072 suffix: includes receiver with valve, suction valve, fan guard, conduit, pressure controls, drier/sightglass
- 075 suffix: includes receiver with valve, suction valve, fan guard, conduit, accumulator, pressure controls, drier/sightglass, crankcase heater, head pressure control valve

controller

- Troubleshooting diagnostics
- System protection

COPELAND

Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
							Suction	Liquid	L	W	H	
FFAPA16ZCFV072*	1 1/2	208-230	1	60	13.9	12	7/8 S	3/8 S	24.10	20.42	19.10	106.00
FFAPA16ZTFC072*	1 1/2	208-230	3	60	11.4	12	7/8 S	3/8 S	24.10	20.42	19.10	106.00
FFAPA18ZCFV072*	1 1/2	208-230	1	60	17.1	12	7/8 S	3/8 S	24.34	24.10	23.23	109.00
FFAPA18ZTFC072*	1 1/2	208-230	3	60	14.4	12	7/8 S	3/8 S	24.34	24.10	23.23	109.00
FFAPA21ZCFV072*	2	208-230	1	60	17.8	15.5	7/8 S	3/8 S	25.06	34.06	19.03	174.00
FFAPA21ZTFC072*	2	208-230	3	60	14.9	15.5	7/8 S	3/8 S	25.06	34.06	19.03	174.00
FFAPA22ZCFV072*	2 1/4	208-230	1	60	22.4	15.5	7/8 S	3/8 S	34.06	25.06	19.03	174.00
FFAPA22ZCFV075*	2 1/4	208-230	1	60	22.4	24.2	7/8 S	3/8 S	34.06	25.06	19.03	174.00
FFAPA22ZTFC072*	2 1/4	208-230	3	60	16.1	15.5	7/8 S	3/8 S	34.06	25.06	19.03	174.00
FFAPA22ZTFC075*	2 1/4	208-230	3	60	16.1	24.2	7/8 S	3/8 S	34.06	25.06	19.03	174.00
FFAPA31ZCFV072*	3	208-230	1	60	25.3	15.5	7/8 S	3/8 S	25.03	40.15	20.13	174.00
FFAPA31ZCFV075*	3	208-230	1	60	25.3	24.2	7/8 S	3/8 S	25.03	40.57	23.16	210.00
FFAPA31ZTFC072*	3	208-230	3	60	19.9	15.5	7/8 S	3/8 S	25.03	40.15	20.13	186.00
FFAPA31ZTFC075*	3	208-230	3	60	19.9	24.2	7/8 S	3/8 S	25.03	40.57	23.16	174.00
FFAPA33ZCFV072*	3 1/2	208-230	1	60	31.8	15.5	1 1/8 S	3/8 S	27.55	40.95	23.10	174.00
FFAPA33ZCFV075*	3 1/2	208-230	1	60	31.8	24.2	1 1/8 S	3/8 S	27.55	40.95	23.10	170.00
FFAPA33ZTFC075*	3 1/2	208-230	3	60	21.8	24.2	1 1/8 S	3/8 S	27.55	40.95	23.10	188.00
FFAPA40ZCFV075*	4	208-230	1	60	33.1	34.4	1 1/8 S	1/2 S	44.06	28.19	27.44	245.00
FFAPA40ZTFC075*	4	208-230	3	60	23.0	34.4	1 1/8 S	1/2 S	44.06	28.19	27.44	245.00



*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov



FFAMA09ZCFV072

MEDIUM TEMPERATURE (3/4 TO 1 1/4 HP), SCROLL R134A R404A R407A R407C R448A R449A

- Improved efficiency from 10%-15% annually
 - Optimized for multiple applications
 - Receiver capacity (Lbs 90% Volume) rated for R404A
- Equipped with electronic unit

Application flexibility

- Operating range of -30°F to 45°F evap (R-404A)
- Designed for up to 110° ambient
- Designed to work with multiple refrigerants
- Optional hood available

AWEF scores for walk-in cooler applications are available under the document tab on www.uri.com

072 suffix: includes receiver with valve, suction valve, fan guard, conduit, pressure controls, drier/sightglass

controller

- Troubleshooting diagnostics
- System protection
- Reduces potential service costs

COPELAND

Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
							Suction	Liquid	L	W	H	
FFAMA09ZCFV072*	3/4	208-230	1	60	8.9	7.3	7/8 S	3/8 S	24.00	20.32	19.12	220.00
FFAMA09ZTFC072*	3/4	208-230	3	60	7.0	7.3	7/8 S	3/8 S	24.00	20.32	19.12	237.00
FFAMA11ZCFV072*	1	208-230	1	60	9.3	7.3	7/8 S	3/8 S	24.00	20.32	19.12	195.00
FFAMA11ZTFC072*	1	208-230	3	60	7.6	7.3	7/8 S	3/8 S	24.00	20.32	19.12	195.00
FFAMA13ZCFV072*	1 1/4	208-230	1	60	11.4	7.3	7/8 S	3/8 S	24.10	20.32	19.12	187.00
FFAMA13ZTFC072*	1 1/4	208-230	3	60	8.0	7.3	7/8 S	3/8 S	24.10	20.32	19.12	187.00



FFALA10ZCFV072

LOW TEMPERATURE (1 TO 5 HP), SCROLL R404A R407A R448A R449A

- Improved efficiency from 10%-15% annually
 - Optimized for multiple applications
 - Receiver capacity (Lbs 90% Volume) rated for R404A
- Equipped with electronic unit

- Reduces potential service costs

AWEF scores for walk-in cooler applications are available under the document tab on www.uri.com

072 suffix: includes receiver with valve, suction valve, fan guard, conduit, pressure controls, drier/sightglass

075 suffix: includes receiver with valve, suction valve, fan guard, conduit, accumulator, pressure controls, drier/sightglass, crankcase heater, head pressure control valve

controller

- Troubleshooting diagnostics
- System protection

COPELAND

Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
							Suction	Liquid	L	W	H	
FFALA10ZCFV072*	1	208-230	1	60	8.6	7.3	7/8	3/8	24.91	18.82	17.77	110.00
FFALA13ZCFV072*	1 1/4	208-230	1	60	10.3	7.3	7/8	3/8	24.91	18.82	17.77	121.00
FFALA13ZTFC072*	1 1/4	208-230	3	60	9.3	7.3	7/8	3/8	24.91	18.82	17.77	118.00
FFALA14ZCFV072*	1 1/2	208-230	1	60	12.2	13	7/8	3/8	24.86	18.82	19.08	124.00
FFALA14ZCFV075*	1 1/2	208-230	1	60	12.2	13	7/8	3/8	24.86	20.97	19.08	96.00
FFALA15ZCFV072*	1 1/2	208-230	1	60	18.4	13	7/8	3/8	24.86	20.42	19.08	120.00
FFALA15ZTFC072*	1 1/2	208-230	3	60	11.7	13	7/8	3/8	24.86	20.42	19.08	118.00
FFALA17ZCFV072*	1 3/4	208-230	1	60	18.7	13	7/8	3/8	24.86	20.42	19.08	123.00
FFALA17ZTFC072*	1 3/4	208-230	3	60	12.1	13	7/8	3/8	24.86	20.42	19.08	122.00
FFALA22ZCFV072*	2	208-230	1	60	21.9	15.5	7/8	3/8	34.03	25.09	18.87	211.00
FFALA22ZCFV075*	2	208-230	1	60	21.9	24.2	7/8	3/8	24.12	25.09	23.10	160.00
FFALA22ZTFC072*	2	208-230	3	60	15.7	15.5	7/8	3/8	34.03	25.09	18.87	204.00
FFALA22ZTFD072*	2	460	3	60	16.1	17.1	7/8	3/8	25.50	34.00	19.00	217.00
FFALA22ZTFD075*	2	460	3	60	8.4	24.2	7/8	3/8	25.50	34.00	19.00	220.00
FFALA26ZCFV072*	2 1/2	208-230	1	60	28.0	15.5	7/8	3/8	34.03	25.09	19.29	209.00
FFALA26ZTFC072*	2 1/2	208-230	3	60	19.8	15.5	7/8	3/8	34.03	25.09	19.29	176.00
FFALA26ZTFC075*	2 1/2	208-230	3	60	19.8	24.2	7/8	3/8	34.11	25.09	23.10	182.00
FFALA26ZTFD072*	2 1/2	460	3	60	11.2	15.5	7/8	3/8	25.50	34.00	19.00	221.00
FFALA26ZTFD075*	2 1/2	460	3	60	11.2	24.2	7/8	3/8	25.50	34.00	19.00	227.00

Continued on next page

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

AIR COOLED CONDENSING UNIT, INDOOR, SCROLL

Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
							Suction	Liquid	L	W	H	
FFALA30ZCFV072*	3	208-230	1	60	36.2	15.5	7/8	3/8	34.06	25.04	20.01	174.00
FFALA30ZTFC072*	3	208-230	3	60	21.5	15.5	7/8	3/8	34.06	25.04	20.01	174.00
FFALA40ZCFV072*	4	208-230	1	60	42.5	15.5	7/8	3/8	34.06	25.04	20.01	213.00
FFALA40ZTFC072*	4	208-230	3	60	29.5	15.5	7/8	3/8	34.06	25.04	20.01	213.00
FFALA40ZTFC075*	4	208-230	3	60	29.5	24.2	7/8	3/8	34.06	25.04	23.09	213.00
FFALA40ZTFD072*	4	460	3	60	15.2	15.5	7/8	3/8	34.06	25.04	20.01	213.00
FFALA50ZTFC072*	5	208-230	3	60	32.6	15.5	7/8	3/8	34.06	25.04	20.01	170.00
FFALA50ZTFD072*	5	460	3	60	14.8	15.5	7/8	3/8	34.06	25.04	20.01	170.00

REFRIGERATION EQUIPMENT



HIGH/LOW TEMPERATURE (1 TO 4 HP), SCROLL R134A R404A

COPELAND

Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
							Suction	Liquid	L	W	H	
FPAK010ZCFV072*	1	208-230	1	60	13.7	7.4 (R134a) 6.3 (R404A)	5/8 S	3/8 S	24.00	17.06	16.62	101.00
FPAK010ZTFC072*	1	208-230	3	60	11.2	7.4 (R134a) 6.3 (R404A)	5/8 S	3/8 S	24.00	17.06	16.62	100.00
FPAK012ZCFV072*	1 1/4	208-230	1	60	16.9	7.4 (R134a) 6.3 (R404A)	5/8 S	3/8 S	24.00	17.06	16.62	191.00
FPAK012ZTFC072*	1 1/4	208-230	3	60	14.2	7.4 (R134a) 6.3 (R404A)	5/8 S	3/8 S	24.00	17.06	16.62	220.00
FPAK013ZCFV072*	1 1/3	208-230	1	60	21.0	7.4 (R134a) 6.3 (R404A)	5/8 S	3/8 S	24.00	17.06	16.62	140.00
FPAK013ZTFC072*	1 1/3	208-230	3	60	14.7	7.4 (R134a) 6.3 (R404A)	5/8 S	3/8 S	24.00	17.06	16.62	120.00
FPAK015ZCFV072*	1 1/2	208-230	1	60	23.9	7.4 (R134a) 6.3 (R404A)	5/8 S	3/8 S	25.20	34.00	19.00	189.00
FPAK015ZTFC072*	1 1/2	208-230	3	60	18.5	7.4 (R134a) 6.3 (R404A)	5/8 S	3/8 S	25.20	34.00	19.00	189.00
FPAK020ZCFV072*	2	208-230	1	60	31.8	12.9 (R134a) 11.1 (R404A)	5/8 S	3/8 S	25.20	34.00	19.00	209.00
FPAK020ZTFC072*	2	208-230	3	60	21.8	12.9 (R134a) 11.1 (R404A)	5/8 S	3/8 S	25.20	34.00	19.00	209.00
FPAK039ZTFC071*	4	208-230	3	60	28.4	12.9 (R134a) 11.1 (R404A)	5/8 S	3/8 S	25.20	34.00	19.00	240.00

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

AIR COOLED CONDENSING UNIT, OUTDOOR, SCROLL



XFAM008ZCFV081

XF SERIES, MEDIUM TEMPERATURE

- Multi-Refrigerant: R22, R134a, R404A, R407C/A, R-448/449A
- Receiver capacity (Lbs 90% Volume) rated for R404A.

COPELAND

Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
							Suction	Liquid	L	W	H	
XFAM008ZCFV081*	3/4	208-230	1	60	8.6	9.1	7/8 S	1/2 S	40.58	17.23	33.08	208.00
XFAM008ZTFC081*	3/4	208-230	3	60	7.1	9.1	7/8 S	1/2 S	40.58	17.23	33.08	208.00
XFAM010ZCFV081*	1	208-230	1	60	8.9	9.1	7/8 S	1/2 S	40.58	17.23	33.08	215.00
XFAM010ZTFC081*	1	208-230	3	60	7.6	9.1	7/8 S	1/2 S	40.58	17.23	33.08	215.00
XFAM012ZCFV081*	1 1/4	208-230	1	60	11.1	9.1	7/8 S	1/2 S	40.58	17.23	33.08	220.00
XFAM012ZTFC081*	1 1/4	208-230	3	60	7.7	9.1	7/8 S	1/2 S	40.58	17.23	33.08	220.00
XFAM015ZCFV081*	1 1/2	208-230	1	60	13.6	9.1	7/8	1/2	40.58	17.23	33.08	218.00
XFAM015ZTFC081*	1 1/2	208-230	3	60	11.5	9.1	7/8	1/2	40.58	17.23	33.08	225.00
XFAM017ZCFV081*	1 1/2	208-230	1	60	16.8	9.1	7/8	1/2	40.58	17.23	33.08	219.00
XFAM017ZTFC081*	1 1/2	208-230	3	60	14.1	9.1	7/8	1/2	40.58	17.23	33.08	219.00
XFAM020ZCFV081*	2	208-230	1	60	16.1	9.1	7/8 S	1/2 S	40.58	17.23	33.08	245.00
XFAM020ZTFC081*	2	208-230	3	60	13.2	9.1	7/8 S	1/2 S	40.58	17.23	33.08	245.00
XFAM022ZCFV081*	2	208-230	1	60	20.7	9.1	7/8	1/2	40.58	17.23	33.08	220.00
XFAM022ZTFC081*	2	208-230	3	60	14.3	9.1	7/8	1/2	40.58	17.23	33.08	219.00
XFAM025ZCFV081*	2 1/2	208-230	1	60	23.6	9.1	7/8 S	1/2 S	40.58	17.23	33.08	245.00
XFAM025ZTFC081*	2 1/2	208-230	3	60	18.2	9.1	7/8 S	1/2 S	40.58	17.23	33.08	245.00
XFAM020DCFV081*	3	208-230	1	60	16.1	9.1	7/8	1/2	40.58	17.23	33.08	244.00
XFAM030ZCFV081*	3	208-230	1	60	30.1	9.1	7/8	1/2	40.58	17.23	33.08	236.00
XFAM030ZTFC081*	3	208-230	3	60	20.1	9.1	7/8	1/2	40.58	17.23	33.08	236.00
XFAM030DCFV081*	3	208-230	1	60	24.7	9.1	7/8	1/2	40.58	17.23	33.08	244.00
XFAM030DTFC081*	3	208-230	3	60	16.8	9.1	7/8	1/2	40.58	17.23	33.08	244.00
XFAM033ZCFV081*	3 1/4	208-230	1	60	30.6	9.1	7/8 S	1/2 S	40.58	17.23	33.08	250.00
XFAM033ZTFC081*	3 1/4	208-230	3	60	20.4	9.1	7/8 S	1/2 S	40.58	17.23	33.08	250.00
XFAM037ZCFV081*	3 3/4	208-230	1	60	33.7	9.1	7/8 S	1/2 S	40.58	17.23	33.08	250.00
XFAM037ZTFC081*	3 3/4	208-230	3	60	26.7	9.1	7/8 S	1/2 S	40.58	17.23	33.08	250.00
XFAM040DTFC081*	4	208-230	3	60	21.7	13.4	7/8	1/2	40.58	17.23	33.08	245.00
XFAM045ZCFV081*	4 1/2	208-230	1	60	37.4	13.4	7/8	1/2	40.58	17.23	33.08	285.00
XFAM045ZTFC081*	4 1/2	208-230	3	60	30.0	13.4	7/8	1/2	40.58	17.23	33.08	280.00
XFAM050DCFV081*	5	208-230	1	60	45.0	13.4	7/8	1/2	40.58	17.23	48.86	250.00
XFAM050DTFC081*	5	208-230	3	60	31.7	13.4	7/8	1/2	40.58	17.23	48.86	250.00
XFAM050ZCFV081*	5	208-230	1	60	41.9	13.4	7/8	1/2	40.58	17.23	48.86	292.00
XFAM050ZTFC081*	5	208-230	3	60	28.9	13.4	7/8	1/2	40.59	17.34	48.88	292.00
XFAM060DTFC081*	6	208-230	3	60	30.2	13.4	7/8	1/2	40.58	17.23	48.86	255.00
XFAM060ZTFC081*	6	208-230	3	60	31.0	13.4	7/8	1/2	40.58	17.23	48.86	299.00

REFRIGERATION EQUIPMENT

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

AIR COOLED CONDENSING UNIT, OUTDOOR, SCROLL



XFAL008ZCFV081

XF SERIES, LOW TEMPERATURE

- Multi-Refrigerant: R404A, R407C/A, R-448/449A
- Receiver capacity (Lbs 90% Volume) rated for R404A.

COPELAND

Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
							Suction	Liquid	L	W	H	
XFAL008ZCFV081*	3/4	208-230	1	60	9.1	9.1	7/8	1/2	40.58	17.23	32.98	225.00
XFAL008ZTFC081*	3/4	208-230	3	60	6.2	9.1	7/8	1/2	40.58	17.23	32.98	221.00
XFAL009ZCFV081*	7/8	208-230	1	60	10.3	9.1	7/8	1/2	40.58	17.23	32.98	248.00
XFAL009ZTFC081*	7/8	208-230	3	60	9.3	9.1	7/8	1/2	40.58	17.23	32.98	250.00
XFAL010ZCFV081*	1	208-230	1	60	11.9	9.1	7/8	1/2	40.58	17.23	32.98	252.00
XFAL010ZTFC081*	1	208-230	3	60	10.4	9.1	7/8	1/2	40.58	17.23	32.98	247.00
XFAL012ZCFV081*	1 1/4	208-230	1	60	18.4	9.1	7/8	1/2	40.58	17.23	32.98	225.00
XFAL012ZTFC081*	1 1/4	208-230	3	60	11.8	9.1	7/8	1/2	40.58	17.23	32.97	221.00
XFAL035ZTFC081*	3 1/2	208-230	3	60	24.9	9.1	7/8	1/2	40.60	17.20	33.00	244.00
XFAL020ZCFV081*	2	208-230	1	60	21.6	9.1	7/8	1/2	40.58	17.28	32.98	246.00
XFAL020ZTFC081*	2	208-230	3	60	16.2	9.1	7/8	1/2	40.58	17.28	32.98	246.00
XFAL030ZTFC081*	3	208-230	3	60	17.2	9.1	7/8	1/2	40.59	17.34	32.97	246.00
XFAL035ZCFV081*	3 1/2	208-230	1	60	34.1	9.1	7/8	1/2	40.59	17.23	33.04	272.00
XFAL040ZCFV081*	4	208-230	1	60	40.1	13.4	7/8	1/2	40.59	17.34	48.88	274.00
XFAL040ZTFC081*	4	208-230	3	60	27.1	13.4	7/8	1/2	40.59	17.34	48.88	312.00
XFAL050ZTFC081*	5	208-230	3	60	28.9	13.4	7/8	1/2	40.59	17.34	48.88	323.00
XFAL051ZCFV081*	5	208-230	1	60	44.8	13.4	7/8	1/2	40.59	17.34	48.88	343.00
XFAL060ZTFC081*	6	208-230	3	60	34.0	13.4	7/8	1/2	40.59	17.23	48.88	341.00

WATER COOLED CONDENSING UNIT, HERMETIC, INDOOR



M7WM0075CFV020

HIGH TEMPERATURE R134A R450A R513A

COPELAND

Part No.	HP	Voltage	MCA (Amps)	MOP	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
					Suction	Liquid	L	W	H	
M7WM0075CFV020*	3/4	208-230	10.0	15	5/8 S	3/8 S	17.45	13.46	11.71	82.00



*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov



M6WH0025IAA020

EXTENDED MEDIUM TEMPERATURE R404A R407C R448A R449A

COPELAND

Part No.	HP	Voltage	MCA (Amps)	MOP	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
					Suction	Liquid	L	W	H	
M6WH0025IAA020*	1/4	115	7.5	15	3/8 S	1/4 S	18.20	12.90	9.40	49.00
M6WH0036IAA020*	1/3	115	7.8	15	3/8 S	1/4 S	18.20	12.90	9.80	47.77
M6WH0050CAV020*	1/2	208-230	5.6	15	3/8 S	1/4 S	18.20	12.90	10.70	43.00
M6WF0056IAA020*	1/2	115	13.1	20	1/2 S	3/8 S	18.30	12.90	10.00	68.00
M6WF0056IAV020*	1/2	208-230	6.6	15	1/2 S	3/8 S	18.30	12.90	10.00	65.00
M6WF0075CAV020*	3/4	208-230	8.5	15	1/2 S	3/8 S	24.20	16.10	11.90	74.58
M6WF0106CAV020*	1	208-230	11.3	20	1/2 S	3/8 S	24.20	16.10	11.90	91.50
M6WF0125TAC020*	1 1/4	208-230	6.9	15	5/8 S	3/8 S	24.20	16.10	13.20	85.00



FFWP015ZCFV020

HIGH/MEDIUM TEMPERATURE R404A R134A R407C R22

Units are medium/high temperature (0 to 45°F) for R407C, R22, R134a and R404A with extended medium capacities to -30°F for R404A

COPELAND

Part No.	HP	Voltage	MCA (Amps)	MOP	Receiver Cap. (Lbs.)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
						Suction	Liquid	L	W	H	
FFWP015ZCFV020*	1 1/2	208-230	12.5	20	11.2	7/8 S	3/8 S	24.00	16.90	16.60	99.00
FFWP015ZTFC020*	1 1/2	208-230	10.0	15	11.2	7/8 S	3/8 S	24.00	16.90	16.60	99.00
FFWP017ZCFV020*	1 3/4	208-230	15.8	15	11.2	7/8 S	3/8 S	24.00	16.90	16.60	120.00
FFWP017ZTFC020*	1 3/4	208-230	13.0	25	11.2	7/8 S	3/8 S	24.00	16.90	16.60	120.00
FFWP020ZCFV020*	2	208-230	15.0	25	11.2	7/8 S	3/8 S	24.00	16.90	16.60	120.00
FFWP020ZTFC020*	2	208-230	12.1	20	11.2	7/8 S	3/8 S	24.00	16.90	16.60	120.00
FFWP022ZCFV020*	2 1/4	208-230	19.6	35	11.2	7/8 S	3/8 S	24.00	16.90	16.60	120.00
FFWP022ZTFC020*	2 1/4	208-230	13.3	20	11.2	7/8 S	3/8 S	24.00	16.90	16.60	130.00
FFWP030ZCFV020*	3	208-230	22.5	40	11.2	7/8	3/8	27.20	21.50	18.20	75.00
FFWP030ZTFC020*	3	208-230	17.1	30	11.2	7/8	3/8	27.20	21.50	18.20	73.00
FFWP032ZCFV020*	3	208-230	23.1	40	11.2	1 1/8 S	3/8 S	27.20	21.50	18.20	164.00
FFWP032ZTFC020*	3	208-230	13.9	20	11.2	1 1/8 S	3/8 S	27.20	21.50	18.20	152.00
FFWP032ZTFD020*	3	460	7.0	15	11.2	1 1/8 S	3/8 S	27.20	21.50	18.20	164.00
FFWP042ZTFC020*	4	208-230	22.5	40	18.7	1 1/8 S	1/2 S	27.20	21.60	21.10	195.00
FFWP050ZTFC020*	5	208-230	26.8	45	18.7	1 1/8 S	1/2 S	27.50	21.70	21.10	218.00
FFWP050ZTFD020*	5	460	9.9	15	18.7	1 1/8 S	1/2 S	27.50	21.70	21.10	218.00

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

AIR COOLED CONDENSING UNIT, INDOOR, HERMETIC



AE4440YAA1AGK

HIGH TEMPERATURE (1/6 TO 1/3 HP), EVAPCON R134A R513A

Feature Guide - G = Fan Guard; C = Power Cord; R = Receiver Tank; V = Service Valve



Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
							Suction	Liquid	L	W	H	
AE4440YAA1AGK*	1/3	115	1	60	9.8	NA	5/16	1/4	16.00	11.50	8.90	40.00
AE4440YAA1AGB*	1/3	115/1	1	60	9.8	2.47	5/16	1/4	16.00	11.50	8.90	40.00
AE4440YAA1AGC*	1/3	115	1	60	9.8	2.47	5/16 VLV	1/4 VLV	16.00	11.50	8.90	40.00



AE3425YAA1ASS

CELSEON, HIGH TEMPERATURE

- Choose between a shaded pole fan motor for standard efficiency or an electronically commutated (EC) type for higher efficiency.
- Molded fan shroud directs air flow across entire coil surface, optimizing system performance.

Model Designations

*K=Power Cord

*B=Power Cord, Receiver Tank

*C=Power Cord, Receiver Tank, Service Valves

*S=Power Cord, Service Valves

Motor Designations

S*=Shaded Pole, Standard Efficiency

C*=Electronically Commutated, High Efficiency

• R404A units are also approved for R407A, R448A, R452A (R507, application specific, not mass approved)

• R134a units are also approved for 513A.

- Our compressors with quality, corrosion resistant components to deliver longer life and greater up-time.
- Sweat connections (except otherwise noted) and electrical screw terminations simplify your installation, saving you time and money. Modular components provide quick and easy replacement.
- Compact design works well in space restricted applications and facilitates field servicing.



Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
							Suction	Liquid	L	W	H	
AE3425YAA1ASS*	1/5	115	1	60	5.1	N/A	3/8	1/4	16.00	11.50	8.90	34.00
AE4430AAA1AXG*	1/4	115	1	60	6.7	N/A	3/8	3/8	16.00	11.50	8.90	56.00
AE4430YAA1AEC*	1/4	115	1	60	6.7	2.45	5/16	1/4	16.00	11.50	8.90	56.00
AE4430YAA1ASB*	1/4	115	1	60	6.7	1.83	5/16	1/4	16.00	11.50	8.90	38.00
AE4440AAA1ASC*	1/3	115	1	60	7.9	1.83	5/16	1/4	16.00	11.50	8.90	40.00
AE4440YAA1ASC*	1/3	115	1	60	7.9	1.83	3/8	1/4	16.00	11.50	8.90	40.00
AE4440YAA1ASK*	1/3	115	1	60	7.9	N/A	5/16	1/4	16.00	11.50	8.90	40.00
AE4440YAA1ASS*	1/3	115	1	60	7.9	N/A	3/8	1/4	16.00	11.50	8.90	40.00
AE4440ZAA1ASC*	1/3	115	1	60	8.5	1.83	5/16	1/4	16.00	11.50	8.90	40.00
AE4450EDS1BDC*	1/2	115	1	60	9.2	2.9	1/2	3/8	16.00	14.30	11.10	40.00
AE4450YAA1ADC*	1/2	115	1	60	10.5	2.9	1/2	3/8	16.00	11.50	11.10	40.60
AKA4457YAADC*	1/2	115	1	60	12.3	2.5	3/8	1/4	20.00	14.30	12.20	94.00
AKA4457YNADC*	1/2	208-230	1	60	6.3	2.5	5/8	3/8	20.00	14.30	12.20	94.00
AKA4472YAADC*	1/2	115	1	60	15.0	3.2	5/8	3/8	20.00	14.30	12.20	54.00

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov



AE2415ZAA1ASC

CELSEON, LOW TEMPERATURE

- Choose between a shaded pole fan motor for standard efficiency or an electronically commutated (EC) type for higher efficiency.
- Molded fan shroud directs air flow across entire coil surface, optimizing system performance.

- Our compressors with quality, corrosion resistant components to deliver longer life and greater up-time.
- Sweat connections and electrical screw terminations simplify your installation, saving you time and money. Modular components provide quick and easy replacement.
- Compact design works well in space restricted applications and facilitates field servicing.

Model Designations

*K=Power Cord

*B=Power Cord, Receiver Tank

*C=Power Cord, Receiver Tank, Service Valves

*S=Power Cord, Service Valves

Motor Designations

S*=Shaded Pole, Standard Efficiency

C*=Electronically Commutated, High Efficiency

X*=X13 Motor

R404A units are also approved for R407A, R448A, R452A, (R507, application specific, not mass approved)

R134a units are also approved for R513A.



Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Receiver Cap. (Lbs.)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
							Suction	Liquid	L	W	H	
AE2415ZAA1ASC*	1/3	115	1	60	6.8	1.83	5/16	1/4	16.00	11.50	8.90	40.00



AKA9435EAADC

CELSEON, MEDIUM TEMPERATURE



Part No.	Capacity at 90 Deg F Ambient +20 (BTUH)	HP	Voltage	Phase	Hertz	MCA (Amps)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
							Suction	Liquid	L	W	H	
AKA9435EAADC*	3510	1/2	115	1	60	9.5	3/8	1/4	15.00	14.00	11.70	52.00
AKA9435ENADC*	3510	1/3	208-230	1	60	5.0	1/2	3/8	15.00	14.00	11.70	52.00
AKA9442ZAADC*	4237	1/2	115	1	60	12.4	5/8	3/8	20.00	14.30	12.10	54.00
AKA9442ZNADC*	4237	1/2	208-230	1	60	5.8	5/8	3/8	20.00	14.30	12.10	54.00
AKA9446EAADC*	4600	1/2	115	1	60	11.9	5/8	3/8	20.00	14.30	12.10	76.00
AKA9446ENADC*	4600	1/2	208-230	1	60	5.8	5/8	3/8	20.00	14.30	12.10	54.00
AKA9461ENADC*	6100	3/4	208-230	1	60	7.3	5/8	3/8	24.00	17.50	13.40	67.00
AKA9463ZAADC*	6360	3/4	115	1	60	16.3	5/8	3/8	24.00	17.50	13.40	67.00
AKA9463ZNADC*	6360	3/4	208-230	1	60	9.0	5/8	3/8	24.00	17.50	13.40	67.00
AWA9514ZXNXM*	14053	1.75	208-230	1	60	16.7	7/8	3/8	19.50	33.48	19.50	121.00



AE2415ZAA1AGC

CELSEON, LOW TEMPERATURE



Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
						Suction	Liquid	L	W	H	
AE2415ZAA1AGC*	1/3	115	1	60	6.8	5/16	1/4	19.00	9.70	10.30	43.00
AJ2423ZAA1CDC	1/2	115	1	60	11.1	5/8	3/8	22.00	17.00	14.00	42.00
AKA2430ZAADC*	3/4	115	1	60	9.1	3/8	3/8	24.00	17.60	13.40	64.00

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

AIR COOLED CONDENSING UNIT, INDOOR, HERMETIC



AWA2448ZDXC

LOW TEMPERATURE (1/8 TO 1 1/2 HP) R404A R407A R4448A R452A R507



Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
							Suction	Liquid	L	W	H	
AWA2448ZDXC*	1	208-230	1	60	12.0	6.3	5/8	3/8	24.00	17.80	15.40	119.00
AWA2464ZDXC*	1 1/2	208-230	1	60	16.9	6.3	7/8	3/8	24.00	17.80	15.40	130.00



AWA2479ZDXC

LOW TEMPERATURE (2 TO 4 HP) R404A R407A R448A R452A R507

These units are designed for use with R404A refrigerant.



Part No.	HP	Voltage	Phase	Hertz	MCA (Amps)	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
							Suction	Liquid	L	W	H	
AWA2479ZDXC*	2	208-230	1	60	17.1	9.8	7/8	3/8	24.00	19.40	16.20	119.00

WATER COOLED CONDENSING UNIT, INDOOR, HERMETIC



AKA9457EXDXW

HIGH TEMPERATURE



Part No.	HP	Voltage	MCA (Amps)	Receiver Cap. (Lbs)	Connection Size (In.)		Dimensions (In.)			Ship Wgt (Lbs.)
					Suction	Liquid	L	W	H	
AKA9457EXDXW*	1/2	208-240/1	5.4	2.7	1/2	3/8	21.40	14.00	10.50	67



*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

REACH-IN EVAPORATOR, AIR DEFROST



LS55

LO-SLOPE, MEDIUM TEMPERATURE

- Low silhouette design for ceiling mounting and maximum use of shelf area
- Low sloped bottom panel promotes highly efficient air distribution
- Aluminum fins and seamless copper tubing
- Thermally protected, permanently lubricated motors
- Moisture-proof wiring harness
- P suffix models have protective coil coating
- Voltage 115/1/60
- BTU @ 10°F T.D.
- Connection: 1/2" OD suction x 1/2" flare liquid



copper tubing

						Motor Data	Connection Size (In.)	Dimensions (In.)			
Part No.	BTUH 25 Deg F at 10 Deg F	Voltage	Phase	Hertz	CFM	Qty	Suction	H	W	L	Ship Wgt (Lbs.)
LS55	550	115	1	60	125	1	1/2	5.00	14.00	10.00	9.00
LS135	1350	115	1	60	200	2	1/2	5.00	14.00	20.50	16.00
LS240	2400	115	1	60	300	1	1/2	6.63	16.50	24.00	23.00



MJ40

MIDJETTE, MEDIUM TEMPERATURE

- Compact unit for ceiling or wall mounting
- Full-hard temper aluminum fins and seamless copper tubing
- Front panel and drain pan are one piece for easy servicing
- Thermally protected, permanently lubricated motors
- Moisture-proof wiring harness
- Voltage 115/1/60
- Connection: 3/8" OD suction x 1/2" flare liquid
- BTU @ 10°F T.D.




						Motor Data	Connection Size (In.)	Dimensions (In.)			
Part No.	BTUH 25 Deg F at 10 Deg F	Voltage	Phase	Hertz	CFM	Qty	Suction	H	W	L	Ship Wgt (Lbs.)
MJ40	400	115	1	60	140	1	3/8	7.00	8.00	13.63	7.00
MJ120	1200	115	1	60	250	2	3/8	7.00	9.00	20.63	15.00

uri.com

Your URI Branch Is Closer Than You Think!

Local Inventory. Local Experts. Find Your Branch.

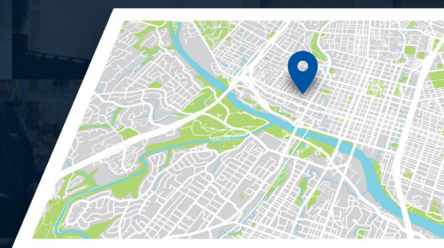

WALK-IN EVAPORATOR, SPECIAL APPLICATION



CTIH-35

WINE CABINET TOP INTERNAL HORIZONTAL EVAPORATOR

Small units designed for medium to large size humidity controlled spaces such as wine cabinets/walls, fur cabinets and tobacco humidors.

CTIH Evaporators are designed to be installed horizontally near the

top of a cabinet and have a 6" profile to minimize unit space and maximize storage space.

Can be used with R22, R134a, or R404a refrigerants. Chilled water models are available by special order.

- Very low noise

- Provides consistent humidity by maintaining a steady coil temperature, reducing the need for expensive temperature and humidity controls in most applications
- Constant pressure expansion valve standard
- Rust-proof aluminum housing with flat black powder coated finish. Other colors available.
- High performance staggered coils with copper tubing mechanically expanded into aluminum fins
- Each unit pressure tested to eliminate leaks.
- Factory wired for easy field installation
- Condensate pump to evacuate excess moisture
- Coil and drain pan coated with LRCCoat™ anticorrosion coating
- Capacities rated at 38°F suction temperature, 55° room temperature, 17°F TD



Part No.	Capacity			Voltage		Dimensions (In.)			Connection Size (In.)		Ship Wgt (Lbs)
	R22	R134a	R404A			H	W	L	Suction	Liquid	
CTIH-35*	3577.0	3538.0	3546.0	115	260	7.25	12.19	48.19	3/8	3/8	35.00



HS25EC

HIGH STATIC EC EVAPORATOR

High Static EC evaporators come standard with an energy-efficient motor that is Title 24 compliant.

They are the perfect unit if you need a remote system. The HS-EC is made in a wide variety of capacities. HS-EC can be ducted

up to 25 feet away. Made to control temperature and humidity for a variety of specialty products.

- 2" Thick Merv 8 Air Filter standard
- Chilled water coil option
- The unit comes standard with a universal AXV Valve and a Liquid Line Solenoid Valve for easy pump down installation
- Coil coated with a non-toxic water-based epoxy coating
- Standard Stainless Steel Drain with 1/2" NPT fitting
- Use with refrigerants: R22, R134a, R404A, R448A
- Capacities rated at 38°F suction temperature, 55° room temperature, 17°F TD



Part No.	Capacity			Voltage		Dimensions (In.)			Connection Size (In.)		Ship Wgt (Lbs)
	R22	R134a	R404A			H	W	L	Suction	Liquid	
HS25EC	2117.0	2023.0	2087.0	115	220	17.25	29.50	17.75	3/8	3/8	60.00
HS31EC	4793.0	4471.0	4579.0	115	380	18.75	29.50	23.00	3/8	3/8	105.00
HS47EC	7635.0	6915.0	7389.0	115	490	23.00	30.50	23.00	5/8	3/8	120.00
HS66EC	8666.0	8080.0	8476.0	115	750	25.00	35.50	24.50	5/8	3/8	125.00
HS87EC	12310.0	11840.0	11900.0	115	810	25.00	35.50	24.50	5/8	3/8	135.00



*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov



LPA17-13Q

DOUBLE ENDED QUIET LOW VELOCITY EVAPORATOR

LRC's Low Profile (LPA-Q) Quiet Unit Coolers are powerful, whisper quiet units in a slim, low profile cabinet. LPA-Q coolers are designed for home or commercial walk-in tobacco, wine, or fur storage rooms or other

acoustically sensitive areas. LPA-Q's efficient, low rpm motors and ultra quiet fan blades reduce noise compared to standard commercial units. The ultra-efficient motor(s) generate significantly less heat than a standard motor, reducing the cooling load in the room up to 50% over conventional units.

- Can be used with R22, R134a and R404a.
- LPA-Q units are simple to install, easy to maintain and will provide years of quiet, reliable service.
- Ideal for humidity sensitive and low noise applications
- Small cabinet maximizes available storage space

- Provides consistent room humidity by maintaining a steady coil temperature, reducing the need for expensive temperature and humidity controls in most applications
- Thermally protected motors Quiet, Low Velocity Cooler Air Defrost - 1,463 to 7,577 BTUH Capacity Applications - Small reach-ins, beverage coolers
- Expansion valve and liquid line solenoid valve standard
- High performance staggered coils, with tubing mechanically expanded into aluminum collared fins
- Units are pressure tested to eliminate leaks
- Rustproof all-aluminum cabinet. Flat black powder coated finish available.
- Factory wired for easy field installation
- Air defrosting coil requires no additional heater
- Coil and drain pan coated with LRCCoat™ anticorrosion coating
- Capacities rated at 38°F suction temperature, 55° room temperature, 17°F TD



Part No.	Capacity						Dimensions (In.)			Connection Size (In.)	Ship Wgt (Lbs)
	R22	R134a	R404A	Voltage	CFM	Nb. of Fans	H	W	L	Suction	
LPA17-13Q*	1834.0	1837.0	1809.0	115	220	1	4.75	20.75	14.25	3/8	20.00
LPA27-18Q*	2228.0	2309.0	2280.0	115	250	1	4.75	24.25	14.25	3/8	25.00
LPA27-23Q*	2983.0	2924.0	2963.0	115	275	1	4.75	31.75	14.25	1/2	30.00



RM25EC

RACK MOUNT, ENERGY EFFICIENT, LOW VELOCITY EVAPORATOR

LRC's Energy Efficient Rack Mount (RM-EC) Evaporators are designed for installation inside a wine rack or between two ceiling joists. RM-EC Evaporators quietly supplies refrigerated and humidity controlled air to medium and high

temperature spaces, making them an ideal choice for small to medium size wine rooms.

RM units have multiple access doors that can be removed as needed for air intake and exhaust depending on how the unit is installed. RM-EC airflow can be adjusted through the unit to maintain room humidity within desired range.

- Can be used with R-22, R134a, R404a, or other refrigerants.
- Low noise design for minimum acoustical impact
- Compact design allows unit to be inconspicuously integrated into a wine room decor

- Energy efficient EC motors meet or exceed California energy standards
- High performance staggered coils, with copper tubing mechanically expanded into aluminum collared fins
- Provides consistent humidity by maintaining a steady coil temperature, reducing the need for expensive temperature and humidity controls in most applications
- Insulated rust-proof aluminum housing. Flat black powder coated finish available
- Thermally protected motors
- Each coil pressure tested to over 380 psig for maximum system integrity
- Factory wired for easy field installation
- Expansion and liquid line solenoid valve pre-installed
- rainpan made of non-corrosive material
- Coil and drain pan coated with LRCCoat™ anticorrosion coating
- Capacities rated at 38°F suction temperature, 55° room temperature, 17°F TD



Part No.	Capacity					Dimensions (In.)			Connection Size (In.)		Ship Wgt (Lbs)
	R22	R134a	R404A	Voltage	CFM	H	W	L	Suction	Liquid	
RM25EC*	2654.0	2572.0	2633.0	115	220	11.38	11.00	29.19	3/8	3/8	26.00
RM35EC*	3543.0	3228.0	3478.0	115	260	11.38	11.00	36.00	3/8	3/8	32.00
RM50EC*	4996.0	4550.0	4723.0	115	335	14.38	11.00	36.00	5/8	3/8	37.00
RM65EC*	6629.0	6500.0	6603.0	115	420	14.38	11.00	36.00	5/8	3/8	43.00



*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

AIR COOLED, CONDENSING UNIT, INDOOR, UNIT ENCLOSURE



ECONOMY

- Economy model
- Includes weather hood instead of condenser grill
- Dimensions are inside measurements

RDM Products

Part No.	Dimensions (In.)			Ship Wgt (Lbs.)
	L	W	H	
ECO180	26.00	20.00	16.00	37.00
ECO200	26.00	24.50	18.00	48.00
ECO230	34.50	24.00	21.00	64.00
ECO240	28.50	37.00	22.50	87.00



DELUXE ENCLOSURE

Constructed of UL Listed 12, 14 and 20 gauge G90U hot dipped galvanized steel, and engineered and manufactured for maximum durability and corrosion protection. Shipped completely knocked down

for ease of shipping. All units are shipped complete with easy assembly instructions with clearly labeled unit panels and all necessary hardware.

Kool Star®

Part No.	Dimensions (In.)			Ship Wgt (Lbs.)
	L	W	H	
TC100LH	24.00	18.00	14.50	35.00
TC150LH	26.00	22.00	18.00	42.24
TC230LH	28.00	37.00	22.00	70.00

UR UNITED REFRIGERATION INC.

CONNECT, LEARN, SUCCEED: Student Discount Card

Benefits:

- Special Contractor Pricing - Save on all products in-store & online
- Exclusive URI.com Access - Thousands of technical documents, videos, & product info
- Hands-On Help - Branch experts ready to guide you



WATER COOLED CONDENSER

COAXIAL, HELICAL

- Water-source heat pump coils operate very effectively as either refrigerant condensers or refrigerant evaporators when transferring heat with water. This makes them an ideal choice for both water-source heat pump and water-cooled condenser applications
- Convolutd inner surface improves heat transfer efficiency and reduces fouling



COAXIAL, HELICAL

- Spiral and trombone models available
- COAX copper tube, COCX cupronickel tube

- Copper inner tubes are recommended for fresh and cooling tower water applications while cupronickel is recommended for ground and sea water applications
- Approved by Underwriters Laboratories, Inc. (U.L.) and the Canadian Standards Association (C.S.A.) at maximum working pressures to 300 psig on the water side and 450 psig on the refrigerant side



Part No.	Nominal Tons	Dimensions (In.)			Refrigerant (In.)			Water (In.)			Ship Wgt (Lbs.)
		H	W	L	Inlet	Outlet	Type	Inlet	Outlet	Type	
COAX2051H	1/2	1.88	6.00	14.50	3/8	3/8	IDS	1/2	1/2	ODS	5.00
COCX2051H	1/2	1.88	6.00	14.50	3/8	3/8	IDS	1/2	1/2	ODS	5.00
COAX2076H	3/4	6.00	6.63	9.94	3/8	3/8	IDS	1/2	1/2	ODS	7.40
COAX2101H	1	6.94	6.63	9.94	3/8	3/8	IDS	1/2	1/2	ODS	8.41
COCX2101H	1	6.94	6.63	9.94	3/8	3/8	IDS	1/2	1/2	ODS	7.00
COAX2151H	1 1/2	6.88	13.94	13.94	3/8	3/8	IDS	5/8	5/8	ODS	4.50
COAX2201J	2	3.88	12.94	12.94	3/8	3/8	IDS	5/8	5/8	ODS	15.05
COAX2251J	2 1/2	5.13	10.38	12.44	1/2	1/2	IDS	3/4	3/4	ODS	16.00
COAX2301J	3	5.06	13.88	13.88	5/8	5/8	IDS	7/8	7/8	ODS	20.00
COAX2401J	4	4.94	14.13	16.25	5/8	5/8	IDS	7/8	7/8	ODS	30.00
COAX2501J	5	6.00	15.38	17.00	3/4	3/4	IDS	1 1/8	1 1/8	ODS	36.00



COAXIAL CUPRONICKEL TUBE, SPIRAL

- Less mounting brackets



Part No.	Nominal Tons	Dimensions (In.)			Refrigerant (In.)			Water (In.)			Ship Wgt (Lbs.)
		H	W	L	Inlet	Outlet	Type	Inlet	Outlet	Type	
COCX2200S	2	2.38	11.50	14.38	3/8	3/8	IDS	5/8	5/8	ODS	6.70
COCX2250S	2 1/2	2.69	13.25	16.44	1/2	1/2	IDS	3/4	3/4	ODS	16.00
COCX2300S	3	2.88	13.56	15.63	5/8	5/8	IDS	7/8	7/8	ODS	9.36
COCX2500S	5	3.38	17.19	19.63	5/8	5/8	IDS	7/8	7/8	ODS	36.00
COCX2750S	7 1/2	3.88	21.13	22.50	3/4	3/4	IDS	1 1/8	1 1/8	ODS	60.00

WATER COOLED CONDENSER




COAX2100S

COAXIAL, COPPER TUBE, SPIRAL



		Dimensions (In.)			Refrigerant (In.)			Water (In.)			Ship Wgt (Lbs.)
Part No.	Nominal Tons	H	W	L	Inlet	Outlet	Type	Inlet	Outlet	Type	
COAX2100S	1	2.13	9.38	11.63	3/8	3/8	IDS	1/2	1/2	ODS	7.00




COCX3010S

COAXIAL, MULTI COIL, CUPRONICKEL TUBE, SPIRAL



		Dimensions (In.)			Refrigerant (In.)			Water (In.)			Ship Wgt (Lbs.)
Part No.	Nominal Tons	H	W	L	Inlet	Outlet	Type	Inlet	Outlet	Type	
COCX3010S	10	17.38	11.25	21.56	1 3/8	1 3/8	IDS	2 1/8	2 1/8	ODS	137.00

AIR COOLED CONDENSER, HEAT EXCHANGER



HXR25

SMALL CAPACITY



		Connection Size (In.)			Dimensions (In.)		Ship Wgt (Lbs.)
Part No.	Nominal HP	Liquid	Vapor	Type	L	W	
HXR25	1/2	1/4	1/2	IDS	11.50	0.88	2.06
HXR50	1	3/8	5/8	IDS	12.75	0.88	0.15
HXR75	1.5	3/8	7/8	IDS	13.63	1.13	0.20
HXR100	2	3/8	1 1/8	IDS	14.13	1.38	2.00
HXR150	3	1/2	1 1/8	IDS	14.13	1.38	1.00
HXR250	5	5/8	1 3/8	IDS	14.25	1.63	3.00
HXR350	7.5	5/8	1 5/8	IDS	16.25	1.63	2.00
HXR500	10	7/8	2 1/8	IDS	17.25	2.63	4.00

WATER COOLED CONDENSER



HSE10MP

SHELL AND TUBE HORIZONTAL, SUPER EFFICIENT

- Suitable for use with R22 and R410A
- Horizontal, cleanable shell and tube design
- New high tech enhanced copper tube geometry
- Smaller foot-print equals less space requirement
- Epoxy coated tube sheets to prevent pitting caused by galvanic action
- Custom models available to 800 nominal HP
- Maximum working pressures: HSE2MP-HSE125MP: shell side 600 psi; tube side 150 psi
- Nominal HP ratings per ARI Standard 450-99, clean

- Removable, epoxy coated, water plates to facilitate cleaning



Part No.	Nominal HP	Pumpdown (Lbs.)	Dimensions (In.)				Refrigerant (In.)			Water (In.)			Ship Wgt (Lbs.)
			Dia.	H	W	L	Inlet	Outlet	Type	Inlet	Outlet	Type	
HSE10MP ¹	10	20.0	6.63	8.10	6.60	33.40	1 3/8	7/8	IDS	1 1/4 fpt	1 1/4 fpt	FPT	93.00
HSE15MP ²	15	35.0	8.63	10.60	8.60	33.40	1 5/8	1 1/8	IDS	2 fpt	2 fpt	FPT	129.00

¹ Gaskets; Front: GASKE3170, Rear GASKE3718 ² Gaskets; Front: GASKE445, Rear GASKE247



MSE750Z

MARINE CONDENSER

- Marine service
- Heavy duty, horizontal, shell and tube design
- Epoxy coated solid cupronickel tube sheets to prevent pitting caused by galvanic action
- Removable solid cupronickel or brass water plates to facilitate cleaning
- All 90/10, cupronickel, heavy wall, straight tube water channels
- Sacrificial zinc anode
- Dual refrigerant outlets, provides liquid seal in heavy seas
- Maximum working pressures: shell side 400 psi; tube side 150 psi
- Due to the high working pressures of R410A, any condenser product must be customized to conform to ASME construction. Please contact branch/customer service for more information.
- Nominal HP: clean/fouled per ARI standard 450-99 (ffc of 0.00025)



Part No.	Nominal HP	Pumpdown (Lbs.)	Dimensions (In.)				Refrigerant (In.)			Water (In.)			Ship Wgt (Lbs.)
			Dia.	H	W	L	Inlet	Outlet	Type	Inlet	Outlet	Type	
MSE750Z	9.5/6.7	24.0	6.63	8.60	6.60	34.30	1 3/8	7/8	IDS	1 1/4	1 1/4	FPT	107.00

LIQUID RECEIVER



UV30

UPRIGHT

- Due to the high working pressures of R410A, any receiver must be customized to conform to ASME construction. Please contact branch/customer service for more information
- Working pressure: 450 psi
- Pumpdowns are calculated at 80% of receiver volume, R22 For other refrigerants multiply listed value by factor below
- R12 x 1.10
- R134a x 1.01
- R404A x 0.89
- R507 x 0.88



Part No.	Dimensions (In.)		Pumpdown (Lbs.)	Connection			Ship Wgt (Lbs.)
	L	H		Inlet	Outlet	Type	
UV30	10.60	18.00	29.0	1 RL - 1/2	1 RL - 1/2	IDS	40.00



RBV36105

HORIZONTAL, BRACKET AND VALVES

- Due to the high working pressures of R410A, any receiver must be customized to conform to ASME construction. Please contact branch/customer service for more information
- Working pressure: 450 psi
- Ships with bracket and valves
- Pumpdown calculated for R22, 80% volume, 90°F liquid
For other refrigerants multiply listed value by factor below
R12 x 1.10
R134a x 1.01
R404A x 0.89
R507 x 0.88



Part No.	Dimensions (In.)		Pumpdown (Lbs.)	Connection		Type	Ship Wgt (Lbs.)
	L	H		Inlet	Outlet		
RBV36105	36.00	11.40	94.0	1 1/4 RL - 1 1/8	1 1/4 RL - 1 1/8	IDS	117.00



UNITED REFRIGERATION INC.
INTRODUCING [URI.COM](http://uri.com):
YOUR ULTIMATE HVAC/R
RESOURCE HUB!



Seamless Access to HVAC/R Essentials:
Discover Account Pricing, Technical
Documents, Current Stock and more
on [URI.COM](http://uri.com)



REGISTER TODAY!

Join our community of HVAC/R professionals who are already benefiting from the power of [URI.COM](http://uri.com). Elevate your skills, streamline your operations, and stay on top of industry trends.



Real Time Stock Information

Plan your projects efficiently with up-to-date stock levels.



Technical Documents

Access installation guides, troubleshooting manuals, and more for enhanced productivity.



Account Pricing


Streamline your procurement process with transparent and consistent pricing



Replacement Parts & Supersedes

Ensure compatibility and efficiency with the most up-to-date components.

WATER COOLED CONDENSER



COAXIAL REFRIGERATION COIL, SPIRAL

Westermeyer
Industries Inc.

Part No.	Type	Nominal Tons	Dimensions (In.)			Refrigerant (In.)		Water (In.)		Ship Wgt (Lbs.)
			H	W	L	Inlet	Outlet	Inlet	Outlet	
C660501	Spiral	2	7.38	13.25	14.50	1/2	1/2	3/4	3/4	25.00
C660502	Spiral, Cupronickel Inner Tube	2	7.38	13.25	14.50	1/2	1/2	3/4	3/4	25.00
C660601	Spiral	2 1/2	7.38	13.25	15.00	1/2	1/2	3/4	3/4	31.00
C660602	Spiral, Cupronickel Inner Tube	2 1/2	7.38	13.25	15.00	1/2	1/2	3/4	3/4	31.00
C660701	Spiral	3	7.88	14.88	15.88	5/8	5/8	7/8	7/8	35.00
C660702	Spiral, Cupronickel Inner Tube	3	7.88	14.88	15.88	5/8	5/8	7/8	7/8	35.00
C660801	Spiral	3 1/2	7.88	15.38	17.25	5/8	5/8	8/9	8/9	37.00
C660802	Spiral, Cupronickel Inner Tube	3 1/2	7.88	15.38	17.25	5/8	5/8	8/9	8/9	37.00
C660901	Spiral	4	8.88	18.13	19.00	5/8	5/8	1 1/8	1 1/8	55.00
C660902	Spiral, Cupronickel Inner Tube	4	8.88	18.13	19.00	5/8	5/8	1 1/8	1 1/8	55.00
C661001	Spiral	5	8.88	18.38	19.75	5/8	5/8	1 1/8	1 1/8	59.00
C661002	Spiral, Cupronickel Inner Tube	5	8.88	18.38	19.75	5/8	5/8	1 1/8	1 1/8	59.00
C661101	Spiral	6	10.88	16.75	19.13	8/9	8/9	1 1/8	1 1/8	63.00
C661102	Spiral, Cupronickel Inner Tube	6	10.88	16.75	19.13	8/9	8/9	1 1/8	1 1/8	63.00
C661201	Spiral	7	10.88	19.50	19.50	8/9	8/9	1 1/8	1 1/8	75.00
C661202	Spiral, Cupronickel Inner Tube	7	10.88	19.50	19.50	8/9	8/9	1 1/8	1 1/8	75.00



COAXIAL REFRIGERATION COIL, HELICAL

Westermeyer
Industries Inc.

Part No.	Type	Nominal Tons	Dimensions (In.)			Refrigerant (In.)		Water (In.)		Ship Wgt (Lbs.)
			H	W	L	Inlet	Outlet	Inlet	Outlet	
C660101	Helical, Right Hand	1/2	6.38	7.38	9.75	3/8	3/8	5/8	5/8	8.00
C660102	Helical, Right Hand, Cupronickel Inner Tube	1/2	6.38	7.38	9.75	3/8	3/8	5/8	5/8	8.00
C660103	Helical, Left Hand	1/2	6.38	7.38	9.75	3/8	3/8	5/8	5/8	8.00
C660104	Helical, Left Hand, Cupronickel Inner Tube	1/2	6.38	7.38	9.75	3/8	3/8	5/8	5/8	8.00
C660201	Helical, Right Hand	3/4	7.38	7.38	9.75	3/8	3/8	5/8	5/8	9.00
C660202	Helical, Right Hand, Cupronickel Inner Tube	3/4	7.38	7.38	9.75	3/8	3/8	5/8	5/8	9.00
C660203	Helical, Left Hand	3/4	7.38	7.38	9.75	3/8	3/8	5/8	5/8	9.00
C660204	Helical, Left Hand, Cupronickel Inner Tube	3/4	7.38	7.38	9.75	3/8	3/8	5/8	5/8	9.00
C660301	Helical, Right Hand	1	8.38	7.38	9.75	3/8	3/8	5/8	5/8	12.00
C660302	Helical, Right Hand, Cupronickel Inner Tube	1	8.38	7.38	9.75	3/8	3/8	5/8	5/8	12.00
C660303	Helical, Left Hand	1	8.38	7.38	9.75	3/8	3/8	5/8	5/8	12.00
C660304	Helical, Left Hand, Cupronickel Inner Tube	1	8.38	7.38	9.75	3/8	3/8	5/8	5/8	12.00
C660401	Helical, Right Hand	1 1/2	7.00	10.50	12.50	1/2	1/2	3/4	3/4	16.00
C660402	Helical, Right Hand, Cupronickel Inner Tube	1 1/2	7.00	10.50	12.50	1/2	1/2	3/4	3/4	16.00
C660403	Helical, Left Hand	1 1/2	7.00	10.50	12.50	1/2	1/2	3/4	3/4	16.00
C660404	Helical, Left Hand, Cupronickel Inner Tube	1 1/2	7.00	10.50	12.50	1/2	1/2	3/4	3/4	16.00

WATER COOLED CONDENSER



HEC CONDENSER, LOW PRESSURE

Westermeyer
Industries Inc.

Part No.	Nominal Tons	Nominal HP	Holding Capacity (Lbs.)	Dimensions (In.)		Refrigerant (In.)		Water (In.)		Ship Wgt (Lbs.)
				H	L	Inlet	Outlet	Inlet	Outlet	
HEC2	2	2.5	11.0	5.00	28.00	5/8	1/2	3/4	3/4	36.00
HEC3	3	3.9	15.0	6.00	28.00	7/8	5/8	3/8	3/8	48.00
HEC5	5	8.28	19.0	6.63	28.00	1 1/8	5/8	1 1/4	1 1/4	66.00
HEC7	7	8.40	22.0	6.63	33.50	1 3/8	7/8	1 1/4	1 1/4	96.00
HEC10	10	11.30	20.0	6.63	33.50	1 3/8	7/8	1 1/4	1 1/4	89.00
HEC15	15	17.55	37.0	8.63	33.50	1 5/8	1 1/8	2	2	123.00
HEC20	20	32.87	60.0	8.63	51.50	1 5/8	1 1/8	2	2	184.00
HEC25	25	34.21	59.0	8.63	51.50	2 1/8	1 3/8	2	2	192.00
HEC30	30	41.50	0.0	10.75	53.00	2 1/8	1 3/8	2 1/2	2 1/2	291.00
HEC40	40	48.20	25.0	10.75	65.00	2 1/8	1 3/8	3	3	348.00
HEC50	50	63.47	18.0	10.75	65.00	2 5/8	1 5/8	3	3	355.00
HEC60	60	82.02	76.0	12.75	66.75	2 5/8	1 5/8	4	4	461.00
HEC70	70	94.85	66.0	12.75	66.88	3 1/8	2 1/8	4	4	480.00
HEC80	80	109.98	56.0	12.75	66.88	3 1/8	2 1/8	4	4	518.00



HECH CONDENSER, HIGH PRESSURE

Westermeyer
Industries Inc.

Part No.	Nominal Tons	Nominal HP	Holding Capacity (Lbs.)	Dimensions (In.)		Refrigerant (In.)		Water (In.)		Ship Wgt (Lbs.)
				H	L	Inlet	Outlet	Inlet	Outlet	
HECH2	2	2.5	11.0	5.00	28.00	5/8	1/2	3/4	3/4	36.00
HECH3	3	3.9	13.0	6.00	28.00	7/8	5/8	3/8	3/8	48.00
HECH5	5	8.61	15.0	6.63	28.00	1 1/8	5/8	1	1	66.00
HECH7	7	8.74	19.0	6.63	33.50	1 3/8	7/8	1 1/4	1 1/4	96.00
HECH10	10	11.75	16.0	6.63	33.50	1 3/8	7/8	1 1/4	1 1/4	89.00
HECH15	15	18.25	32.0	8.63	33.50	1 5/8	1 1/8	2	2	123.00
HECH20	20	34.18	53.0	8.63	51.50	1 5/8	1 1/8	2	2	184.00
HECH25	25	35.58	51.0	8.63	51.50	2 1/8	1 3/8	2	2	192.00
HECH30	30	43.16	85.0	10.75	53.00	2 1/8	1 3/8	2 1/2	2 1/2	291.00
HECH40	40	50.13	7.0	10.75	65.00	2 1/8	1 3/8	3	3	348.00
HECH50	50	66.01	0.0	10.75	65.00	2 5/8	1 5/8	3	3	355.00
HECH60	60	85.30	65.0	12.75	66.75	2 5/8	1 5/8	4	4	461.00



HEM100Z

MARINE CONDENSER

This new line of HEM marine condensers are high capacity and cleanable. The enhanced cupronickel tubing provides extra heat transfer surface, thereby reducing the overall size of the

condenser. All models come with silicon bronze hardware & a sacrificial zinc anode.

- Maximum working pressure refrigerant: 400 psig
- Maximum working pressure fluid: 150 psig
- Holding Capacity form R404A

Westermeyer
Industries Inc.

Part No.	Nominal Tons	Nominal HP	Holding Capacity (Lbs.)	Dimensions (In.)		Refrigerant (In.)		Water (In.)		Ship Wgt (Lbs.)
				H	L	Inlet	Outlet	Inlet	Outlet	
HEM100Z	1	1.30	14.0	6.00	21.63	5/8	1/2	1/2	1/2	35.00
HEM200Z	2	2.6	12.0	6.00	21.63	7/8	5/8	1/2	1/2	49.00
HEM300Z	3	4.6	13.0	6.63	21.75	7/8	5/8	3/4	3/4	58.00
HEM500Z	5	6	11.0	6.63	21.75	1 1/8	5/8	3/4	3/4	77.00
HEM750Z	7 1/2	9.5	19.0	6.63	33.25	1 3/8	7/8	1 1/4	1 1/4	107.00
HEM1005Z	10	11.7	23.0	6.63	40.25	1 3/8	7/8	1 1/4	1 1/4	121.00
HEM1500Z	15	19.9	41.0	8.63	40.25	1 5/8	1 1/8	2	2	181.00
HEM2005Z	20	26.7	73.0	8.63	64.50	2 1/8	1 1/8	2	2	254.00
HEM2505Z	25	33.1	66.0	8.63	64.50	2 1/8	1 3/8	2	2	265.00
HEM3006Z	30	39.7	83.0	8.63	76.50	2 5/8	1 3/8	2 1/2	2 1/2	286.00
HEM3305Z	35	44.4	14.0	10.75	65.00	2 5/8	1 3/8	2 1/2	2 1/2	338.00
HEM4005Z	40	45.8	10.0	10.75	65.00	2 5/8	1 3/8	2 1/2	2 1/2	343.00
HEM4505Z	45	57.7	37.0	10.75	77.00	2 5/8	1 5/8	2 1/2	2 1/2	388.00
HEM5005Z	50	59.6	33.0	10.75	77.00	2 5/8	1 5/8	2 1/2	2 1/2	394.00
HEM6505Z	65	71	25.0	12.75	78.75	3 1/8	2 1/8	4	4	517.00
HEM7505Z	75	84.8	15.0	12.75	78.75	3 1/8	2 1/8	4	4	533.00
HEM100HPZ	100	132.2	58.0	12.75	133.50	3 1/8	2 1/8	5	5	1133.00
HEM120HPZ	120	137.2	44.0	12.75	133.50	3 5/8	2 1/8	5	5	1158.00



HEMH500Z

MARINE CONDENSER - R410A

Marine-grade condensers are high-capacity and cleanable. The water side is entirely constructed with 90/10 cupronickel, including the heads, with enhanced tubing providing extra heat transfer

surface, reducing the overall size of the condenser. All marine models come with a sacrificial zinc anode and undergo a two-stage anti-corrosive powder coating process.

Westermeyer
Industries Inc.

Part No.	Nominal Tons	Dimensions (In.)		Refrigerant (In.)		Water (In.)		Ship Wgt (Lbs.)
		H	L	Inlet	Outlet	Inlet	Outlet	
HEMH500Z	5	6.63	21.75	1.13	0.63	0.75	0.75	77.00
HEMH750Z	7.5	6.63	33.25	1.38	0.88	1.25	1.25	107.00
HEMH1005Z	10	6.63	40.25	1.38	0.88	1.25	1.25	121.00
HEMH1500Z	15	8.63	40.25	1.63	1.13	2.00	2.00	181.00
HEMH2505Z	25	8.63	64.50	2.13	1.38	2.00	2.00	265.00

WATER COOLED CONDENSER



HPC200A

HPC CONDENSER, LOW PRESSURE, HIGH PUMPDOWN

The enhanced copper tubing provides extra heat transfer surface, thereby reducing the overall size of the condenser. Both the tube sheet and removable

water plates have been epoxy coated for increased corrosion protection.

- Maximum working pressure refrigerant: 450 psig
- Maximum working pressure fluid: 150 psig
- Holding capacity for R404A

Westermeyer
Industries Inc.

REFRIGERATION EQUIPMENT

Part No.	Nominal Tons	Nominal HP	Holding Capacity (Lbs.)	Dimensions (In.)		Refrigerant (In.)		Water (In.)		Ship Wgt (Lbs.)
				H	L	Inlet	Outlet	Inlet	Outlet	
HPC200A	2	3.50	13.0	6.63	22.00	7/8	5/8	3/4	3/4	52.00
HPC300A	3	5.6	19.0	6.63	28.63	7/8	5/8	3/4	3/4	71.00
HPC500A	5	7.2	33.0	8.63	28.00	1 1/8	5/8	1 1/4	1 1/4	90.00
HPC750A	7 1/2	10.8	30.0	8.63	27.57	1 3/8	7/8	1 1/4	1 1/4	109.00
HPC755A	7 1/2	9.7	53.0	8.63	40.00	1 3/8	7/8	1 1/4	1 1/4	144.00
HPC1000A	10	16	58.0	8.63	46.44	1 3/8	7/8	1 1/4	1 1/4	159.00
HPC1500A	15	24.5	65.0	8.63	52.00	1 3/8	1 1/8	1 1/2	1 1/2	180.00
HPC1555A	15	24.5	96.0	10.75	54.00	1 5/8	1 1/8	1 1/2	1 1/2	272.00
HPC2005A	20	30	39.0	10.75	66.00	2 1/8	1 1/8	2	2	313.00
HPC2026A	20	30	9.0	12.75	66.00	2 1/8	1 1/8	2	2	428.00
HPC2505A	25	37.5	38.0	10.75	66.00	2 1/8	1 3/8	2 1/2	2 1/2	345.00
HPC2527A	25	37.5	42.0	12.75	66.00	2 1/8	1 3/8	2 1/2	2 1/2	413.00
HPC3005A	30	45	32.0	10.75	66.00	2 5/8	1 3/8	2 1/2	2 1/2	350.00
HPC3028A	30	45	1.0	12.75	66.00	2 5/8	1 3/8	2 1/2	2 1/2	448.00
HPC3505A	35	50	3.0	12.75	66.00	2 5/8	1 3/8	2 1/2	2 1/2	400.00
HPC4005A	40	55	1.0	14.00	67.00	2 5/8	1 3/8	3	3	489.00
HPC4505A	45	65	35.0	14.00	67.00	2 5/8	1 5/8	3	3	519.00
HPC5005A	50	70	37.0	14.00	67.00	2 5/8	1 5/8	4	4	527.00
HPC5505A	55	75	28.0	14.00	67.00	3 1/8	1 5/8	4	4	521.00
HPC6005A	60	82.5	23.0	14.00	67.00	3 1/8	2 1/8	4	4	542.00
HPC7005A	70	97.6	15.0	14.00	67.00	3 1/8	2 1/8	4	4	548.00
HPC8005A	80	110.1	9.0	14.00	67.00	3 1/8	2 1/8	4	4	596.00



HPCH200A

HPC CONDENSER, LOW PRESSURE, HIGH PUMPDOWN - R410A MODEL

Designed for high-pumpdown applications. The enhanced copper tubing provides extra heat transfer surface, reducing the overall size of the condenser. Both the tube

sheet and removable water plates have been epoxy coated for increased corrosion protection.

Westermeyer
Industries Inc.

Part No.	Nominal Tons	Dimensions (In.)		Refrigerant (In.)		Water (In.)		Ship Wgt (Lbs.)
		H	L	Inlet	Outlet	Inlet	Outlet	
HPCH200A	2	6.63	22.00	0.88	0.63	0.75	0.75	52.00
HPCH2505A	25	10.75	66.00	2.13	1.38	1.50	1.50	345.00
HPCH300A	3	6.63	28.63	0.88	0.63	0.75	0.75	71.00
HPCH500A	5	8.63	28.00	1.13	0.63	1.25	1.25	90.00
HPCH750A	7.5	8.63	27.57	1.38	0.88	1.25	1.25	109.00
HPCH755A	7.5	8.63	40.00	1.38	0.88	1.25	1.25	144.00
HPCH1000A	10	8.63	46.44	1.38	0.88	1.25	1.25	159.00
HPCH1500A	15	8.63	52.00	1.38	1.13	1.50	1.50	180.00
HPCH1555A	15	10.75	54.00	1.63	1.13	1.50	1.50	272.00
HPCH2005A	20	10.75	66.00	2.13	1.13	2.00	2.00	313.00
HPCH3005A	30	10.75	66.00	2.63	1.38	1.50	1.50	350.00

REFRIGERATION EQUIPMENT

LIQUID RECEIVER



R301

UPRIGHT, LOW PRESSURE, UL

- Welded and brazed design for higher strength
- Nitrogen tested for cleanliness
- Removable swivel valves
- Includes Rotolock valve
- R6-03 supplied with three mounting legs instead of mounting

- Maximum Working Pressure: 450 psig
- All receiver pump-down capacities are calculated at 90% of receiver volume and 90°F. For R-134A, use the R-22 capacity. For R-404A, multiply R-22 capacity by .90.

stud.

Westermeyer
Industries Inc.

Part No.	Dimensions (In.)		Holding Cap. (Lbs.)	Connection		Ship Wgt (Lbs.)
	Dia.	H		Inlet	Outlet	
R301	3.00	10.00	2.5	1/4" Flare Elbow	1/4" Flare Valve	5.00
R501	5.00	10.00	6.5	3/8" Flare Elbow	3/8" Flare Valve	10.00
R601	6.00	12.00	11.5	3/8" Flare Elbow	3/8" Flare Valve	14.00
R602	6.00	18.00	17.25	1/2" Flare Elbow	1/2" Flare Valve	18.00
R603	6.00	24.00	23.25	1/2" Flare Elbow	1/2" Flare Valve	24.00

LIQUID RECEIVER



R302

UPRIGHT, HIGH PRESSURE, UL

- Welded design for higher strength
- Nitrogen tested for cleanliness
- Includes fusible plug
- Rotolock valve NOT included

All receiver pump-down capacities are calculated at 90% of receiver volume and 90°F for R-410A. For CO2 at +20°F, multiply R-410A capacity by 0.80.

Westermeyer
Industries Inc.

Part No.	Dimensions (In.)		Holding Cap. (Lbs.)	Connection		Ship Wgt (Lbs.)
	Dia.	H		Inlet	Outlet	
R302	3.00	10.00	2.3	1/2	1/2	6.00
R402	4.00	10.00	3.8	1/2	1/2	10.00
R502	5.00	10.00	5.8	5/8	5/8	14.00
R604	6.00	12.00	10.0	5/8	5/8	21.00



RV615

UPRIGHT, LOW PRESSURE, ASME

Pump-down capacities shown are calculated based on 90% at 90°F for R-22.

Westermeyer
Industries Inc.

Part No.	Dimensions (In.)		Holding Cap. (Lbs.)	Connection		Ship Wgt (Lbs.)
	Dia.	H		Inlet	Outlet	
RV615	6.63	15.00	16.0	5/8	5/8	22.00
RV816	8.63	16.00	29.0	5/8	5/8	26.00
RV1018	10.75	18.00	49.0	1 1/8	1 1/8	55.00
RV1224	12.75	24.00	97.0	1 1/8	1 1/8	82.00



HORIZONTAL, LOW PRESSURE, ASME

Pump-down capacities shown are calculated based on 90% at 90°F for R-22.

Westermeyer
Industries Inc.

Part No.	Dimensions (In.)		Holding Cap. (Lbs.)	Connection		Ship Wgt (Lbs.)
	Dia.	L		Inlet	Outlet	
RH636	6.63	36.00	41.0	7/8	7/8	40.00
RH848	8.63	48.00	94.0	1 1/8	1 1/8	74.00
RH1036	10.75	36.00	5.0	1 3/8	1 3/8	96.00
RH1048	10.75	48.00	42.0	1 3/8	1 3/8	124.00
RH1060	10.75	60.00	80.0	1 3/8	1 3/8	152.00
RH1072	10.75	72.00	17.0	1 3/8	1 3/8	181.00



UPRIGHT, HIGH PRESSURE, ASME

Pump-down capacities shown are calculated based on 90% at 90°F for R-410a.

Westermeyer
Industries Inc.

Part No.	Dimensions (In.)		Holding Cap. (Lbs.)	Connection		Ship Wgt (Lbs.)
	Dia.	H		Inlet	Outlet	
RVH615	6.63	15.00	14.0	5/8	5/8	25.00
RVH1018	10.75	18.00	41.0	1 1/8	1 1/8	66.00



HORIZONTAL, HIGH PRESSURE, ASME

Pump-down capacities shown are calculated based on 90% at 90°F for R-410a.

Westermeyer
Industries Inc.

Part No.	Dimensions (In.)		Holding Cap. (Lbs.)	Connection		Ship Wgt (Lbs.)
	Dia.	L		Inlet	Outlet	
RHH836	6.63	36.00	60.0	1 1/8	1 1/8	50.00

ACCESSORIES

BARREL BRACKET



6B

UNIVERSAL HINGED

Sigma Engineering LLC

Part No.	Inside Dia. (In.)	Base Dimensions (In.)	
		L	W
6B	6 5/8	7.0	2 9/16



BR1

COMPRESSOR/CONDENSER

- Base width 3"

Sigma Engineering LLC

Part No.	Inside Dia. (In.)	Base Dimensions (In.)	
		L	W
BR1	6	14.0	3



BK06A

BRACKETS

Mounting brackets can be used to install horizontal receivers and condensers. All bracket dimension including the mounting hole locations are shown in the table below. Brackets are powder

coated and

Westermeyer Industries Inc.

Part No.	Inside Dia. (In.)	Base Dimensions (In.)	
		L	W
BK06A	5.50	7.0	2.63
BK06B	5.50	7.0	2.63
BK08A	8.50	9.0	2.63
BK10B	10.50	11.0	2.63
BK12B	12.32	13.0	3.13

ROTOLOCK® ADAPTER



SERCAP06B

REPLACEMENT CAPS FOR ROTOLOCK & SERVICE VALVES

Sigma Engineering LLC

Part No.	Rotolock Size, TPI (In.)
SERCAP06B*	1-3/8 - 12
SERCAP20B*	11/16 - 20
SESCAPCB4510*	1/4 SAE
SERCAP01P	3/4 - 16
SERCAP02P	3/4 - 16
SERCAP03P	1 - 14
SERCAP04B*	1-1/16 - 18
SERCAPKIT*	ACCT
SERCAP04P	1-1/16 - 18
SERCAP08P	1-5/8 - 12
SERCAP53P	M27 x 2
SERCAP01B*	3/4 - 16
SERCAP02B*	3/4 - 16
SERCAP02S	3/4 - 16
SERCAP03S	1 - 14
SERCAP54P	M36 x 1.5
SERCAP01S	3/4 - 16
SERCAP08B*	1-5/8 - 12
SERCAP06P	1-3/8 - 12
SERCAP10S	7/8 - 18
SERCAP22P	M22 x 1.5
SERCAP53A	M27 x 2
SERCAP03B*	1 - 14
SERCAP24P	M24 x 2



BA03X06

MALE ROTOLOCK® X SWEAT

Sweat connection machined to the next greater size

Sigma Engineering LLC

Part No.	Rotolock Size, TPI (In.)	Connection Size (In.)		
		IDS	ODS	Type
BA03X06	3/4 - 16	3/8	1/2	IDS
BA03X08	1 - 14	3/8	1/2	IDS
BA04X08	1 - 14	1/2	5/8	IDS
BA05X08	1 - 14	5/8	7/8	IDS
BA07X10	1 1/4 - 12	7/8	1 1/8	IDS
BA09X10	1 1/4 - 12	1 1/8	1 3/8	IDS
BA09X14	1 3/4 - 12	1 1/8	1 3/8	IDS
BA11X14	1 3/4 - 12	1 3/8	1 5/8	IDS
AA07	3/4 - 16	3/4	-	IDS

Continued on next page

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

Part No.	Rotolock Size, TPI (In.)	Connection Size (In.)		
		IDS	ODS	Type
BA05X10*	1-1/4 - 12	5/8	7/8	IDS
BA07X04P	1/2 MPT	7/8	-	IDS



SA03

FEMALE ROTALOCK® X SWEAT

Sigma Engineering LLC

Part No.	Rotolock Size, TPI (In.)	Connection Size (In.)
		IDS
SA03	3/4 - 16	3/8
SA04	1 - 14	1/2
SA05	1 - 14	5/8
SA07	1 1/4 - 12	7/8
SA09	1 1/4 - 12	1 1/8
SA11	1 3/4 - 12	1 3/8

ROTALOCK® VALVE



H03FT

HORIZONTAL

- Teflon seal furnished

Sigma Engineering LLC

Part No.	Connection		Rotolock Size, TPI (In.)	Gauge Port Location
	Size (In.)	Type		
H03FT	3/8	MFL	3/4 - 16	Top
H05ST	5/8	IDS	1 - 14	Top
H07SL	7/8	IDS	1 1/4 - 12	Left
H11ST	1 3/8	IDS	1 3/4 - 12	Top



V05ST

VERTICAL

- Teflon seal furnished

Sigma Engineering LLC

Part No.	Connection		Rotolock Size, TPI (In.)	Gauge Port Location
	Size (In.)	Type		
V05ST	5/8	IDS	1 - 14	Opposite
V09ST	1 1/8	IDS	1 1/4 - 12	Opposite
H04ST	1/2	IDS	1 - 14	Top
V05FL	5/8	SAE	1 - 14	Left
V07SR	7/8	IDS	1-1/4 - 12	Right

ROTALOCK®



24590

TEFLON SEAL

- 1/16" thickness

Sigma Engineering LLC

Part No.	Diameter (In.)		Use with Rotolock Thread
	Inside	Outside	
24590	7/16	9/16	3/4 - 16
24591	5/8	3/4	1 - 14
24592	7/8	1	1 1/4 - 12
24593	1 3/8	1 1/2	1 3/4 - 12
SETSKIT	-	-	ASST

SHUT OFF VALVE



1RX12S

ROTOLOCK X IDS, 90°

- Female rotolock thread

Part No.	Rotolock Size, TPI (In.)	Connection	
		Size (In.)	Type
1RX12S	1 - 14	1/2	ODS
1RX58S	1 - 14	5/8	ODS
114RX58S	1 1/4 - 12	5/8	ODS
114RX34S	1 1/4 - 12	3/4	ODS
114RX78S	1 1/4 - 12	7/8	ODS
114RX118S	1 1/4 - 12	1 1/8	ODS
134RX118S	1 3/4 - 12	1 1/8	ODS
134RX138S	1 3/4 - 12	1 3/8	ODS
134RX158S	1 3/4 - 12	1 5/8	ODS



1RX12FL

ROTOLOCK X MFL, 90°

- Female rotolock thread

Part No.	Rotolock Size, TPI (In.)	Connection	
		Size (In.)	Type
1RX12FL	1 - 14	1/2	MFL
1RX58FL	1 - 14	5/8	MFL

*WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov

NOTES

REFRIGERATION EQUIPMENT

CATEGORY: 01 REFRIGERATION EQUIPMENT

 *WARNING: This item may contain chemicals known to cause cancer and/or reproductive harm in the state of California. For more information go to www.P65Warnings.ca.gov